

HILLSIDE COMMUNITY CHURCH SITE RENOVATIONS


PROJECT ADDRESS: 9915 RAY WHITE ROAD, FORT WORTH, TX 76244

TDLR: TABS2026028406

INDEX:

- ARCHITECTURE:
- A0.0 COVER SHEET
 - A0.1 SITE PLAN & BUILDING DEMOLITION PLAN
 - A0.2 ENLARGED PLANS, ELEVATIONS & DETAILS

- CIVIL:
- CIVIL COVER SHEET
 - V01 TOPOGRAPHIC SURVEY
 - C1-1 DEMOLITION PLAN
 - C2-1 PAVING PLAN
 - C3-1 GRADING PLAN
 - C4-1 DRAINAGE AREA MAP
 - C5-1 EROSION CONTROL PLAN
 - C6-1 CONSTRUCTION DETAILS
 - L1 LANDSCAPE PLAN
 - L2 LANDSCAPE SPECIFICATIONS

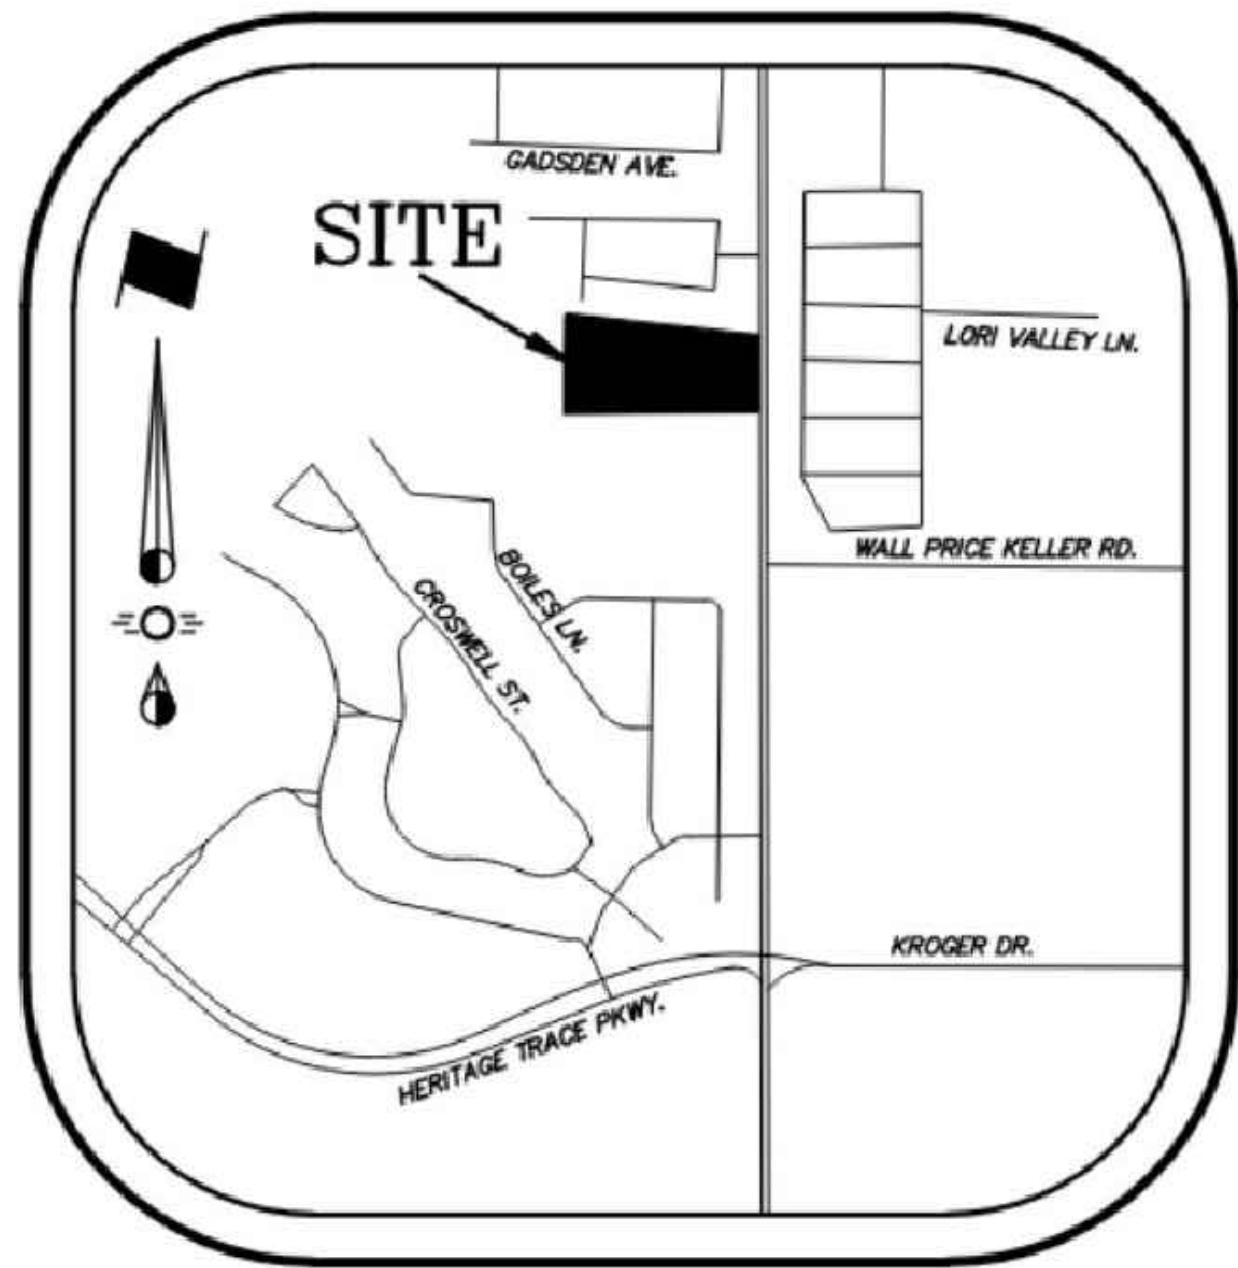


VICINITY MAP
N.T.S.



CODE REQUIREMENTS:

- | | |
|-----------------|---|
| BUILDING CODE | - 2021 INTERNATIONAL EXISTING BUILDING CODE WITH LOCAL AMENDMENTS |
| ELECTRICAL CODE | - 2023 NATIONAL ELECTRICAL CODE WITH AMENDMENTS |
| PLUMBING CODE | - 2021 INTERNATIONAL PLUMBING CODE |
| ENERGY CODE | - 2015 INTERNATIONAL ENERGY CODE WITH LOCAL AMENDMENTS |
| FIRE CODE | - 2021 INTERNATIONAL FIRE CODE WITH LOCAL AMENDMENTS |

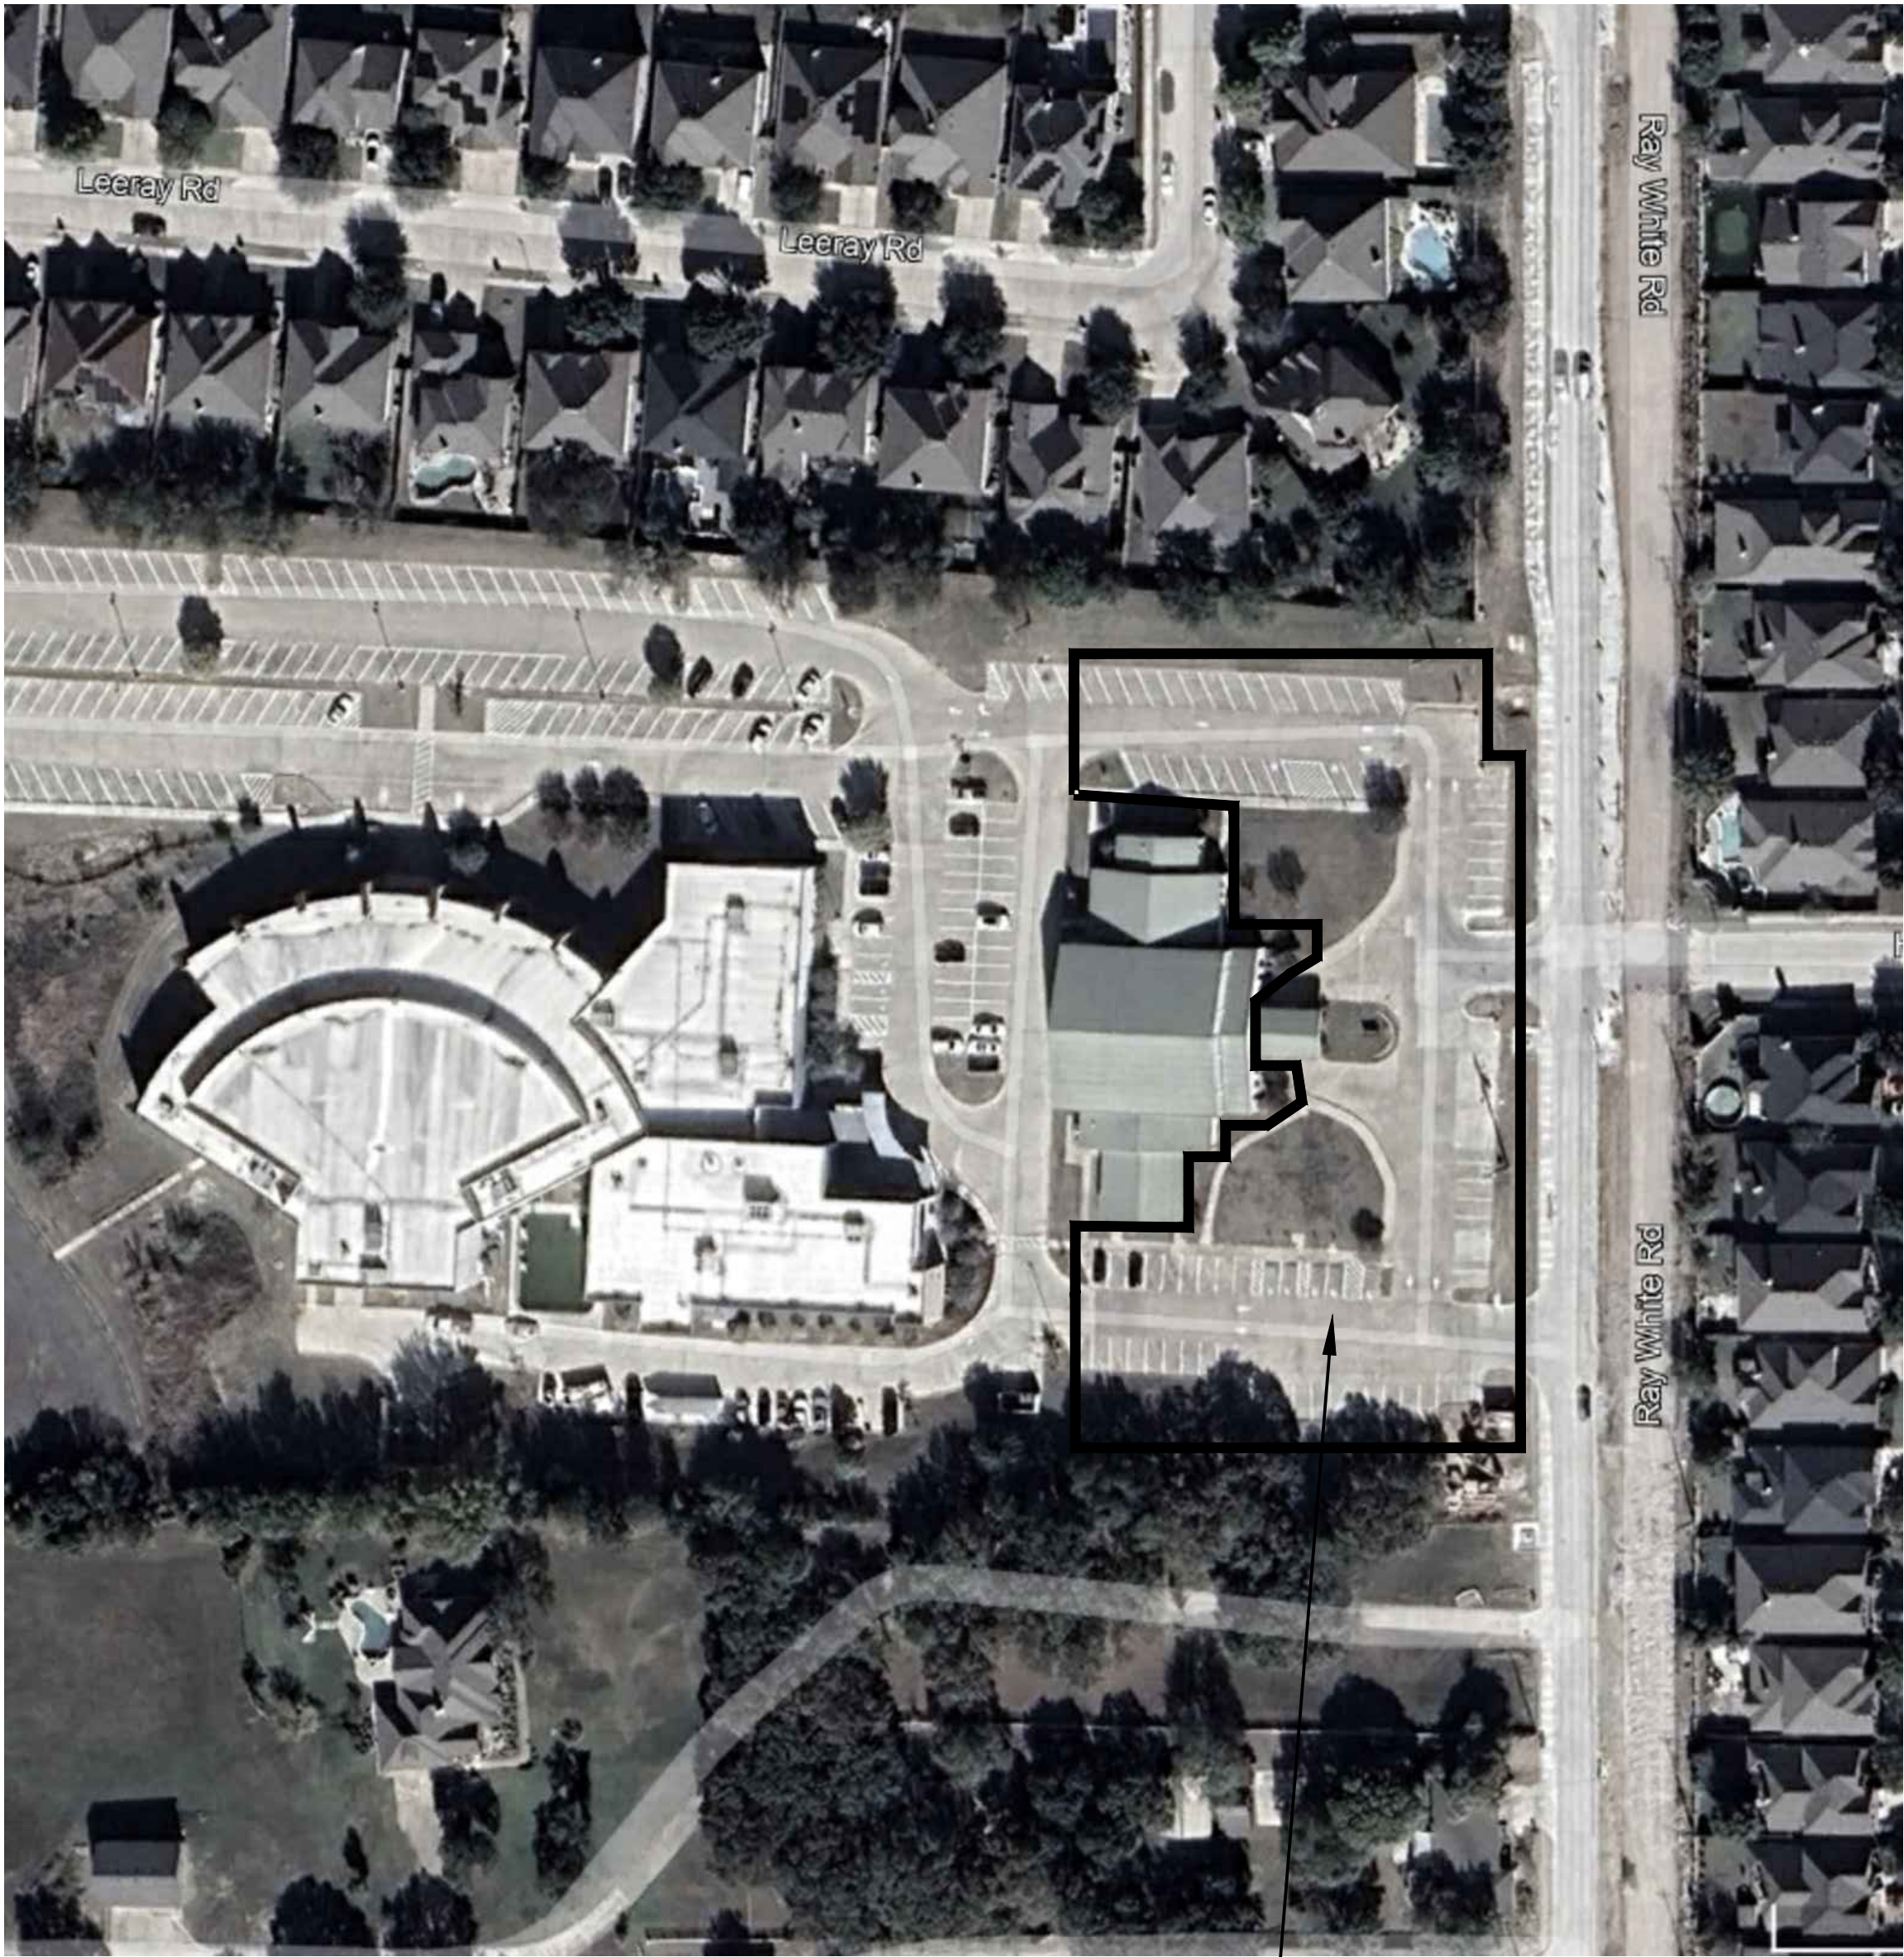

SITE MAP
N.T.S.

PROJECT SITE



STRUCTURAL ENGINEER

CWR STRUCTURAL ENGINEERING

719 MONIQUE
CEDAR HILL, TX 75104

LANDSCAPE ARCHITECT

GRUBBS DESIGN GROUP P.L.L.C.

403 SOUTH TENNESSEE STREET
MCKINNEY, TX 75069

CIVIL ENGINEER

CROSS ENGINEERING

1720 W. VIRGINIA STREET
MCKINNEY, TX 75069

ARCHITECT

SHANKS ARCHITECTS

901 MAIN STREET, SUITE 4940
DALLAS, TX. 75202
214-522-4033

SHANKS
ARCHITECTS

901 Main Street Suite 4940 972.788.9300
Dallas, Texas 75202 (f) 214.594.5498
© 2026 Shanks Architects, Inc.



HILLSIDE COMMUNITY CHURCH
SITE RENOVATIONS


9915 RAY WHITE RD
FORT WORTH, TX 76244

SA JOB #: 202601


DATE OF ISSUE: 08.21.2026

FOR PERMIT / BID


NO.	DATE	REVISION

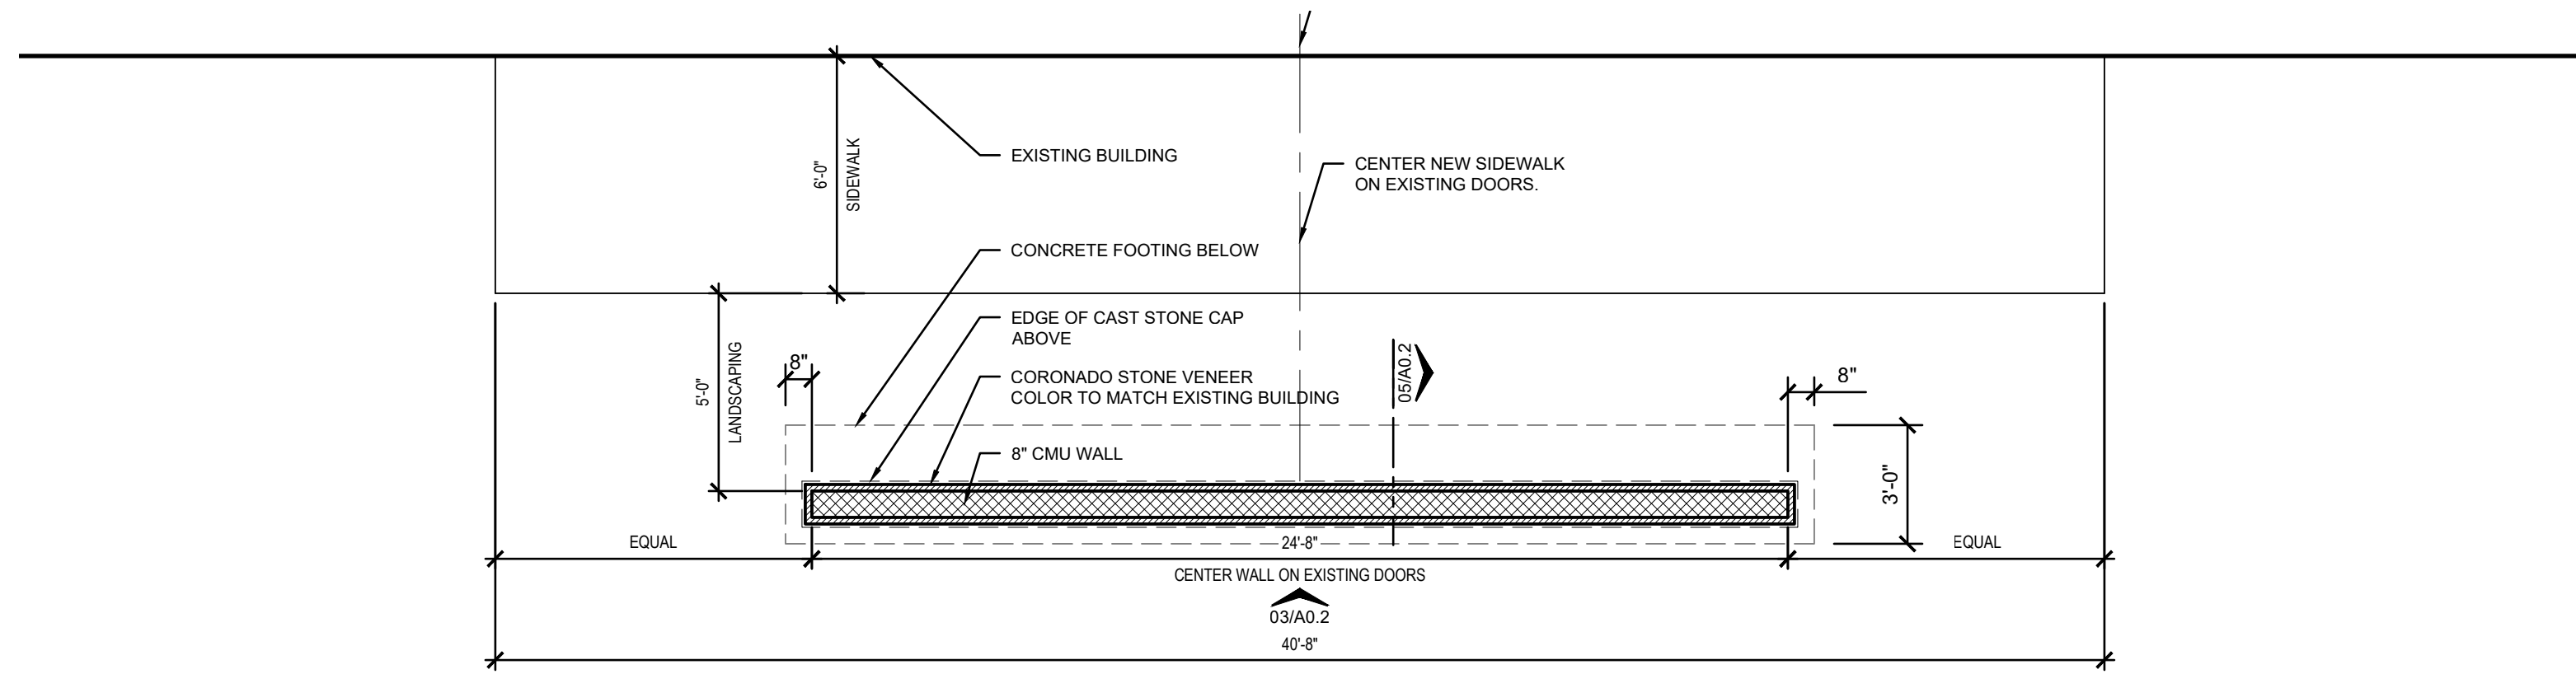


01 ENLARGED PLAN
SCALE: 1/4" = 1'-0"

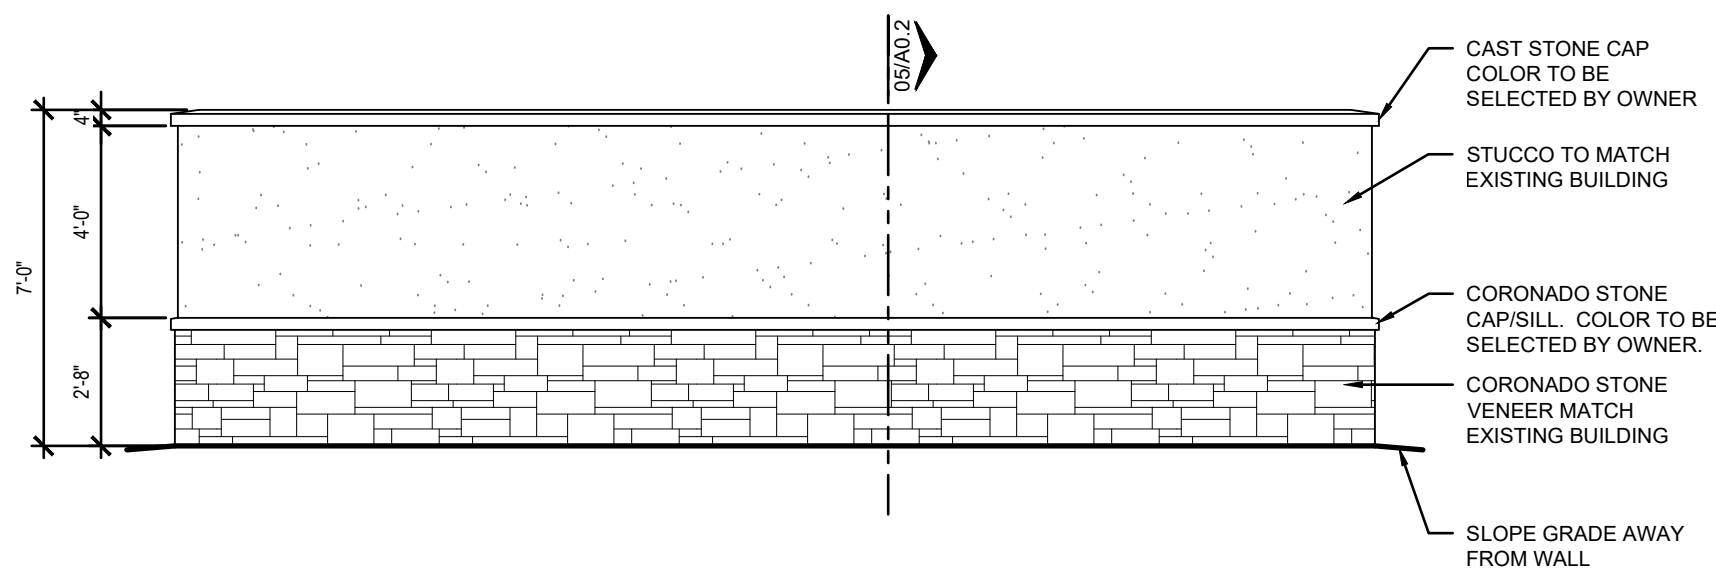


03 WALL ELEVATION
SCALE: 1/4" = 1'-0"

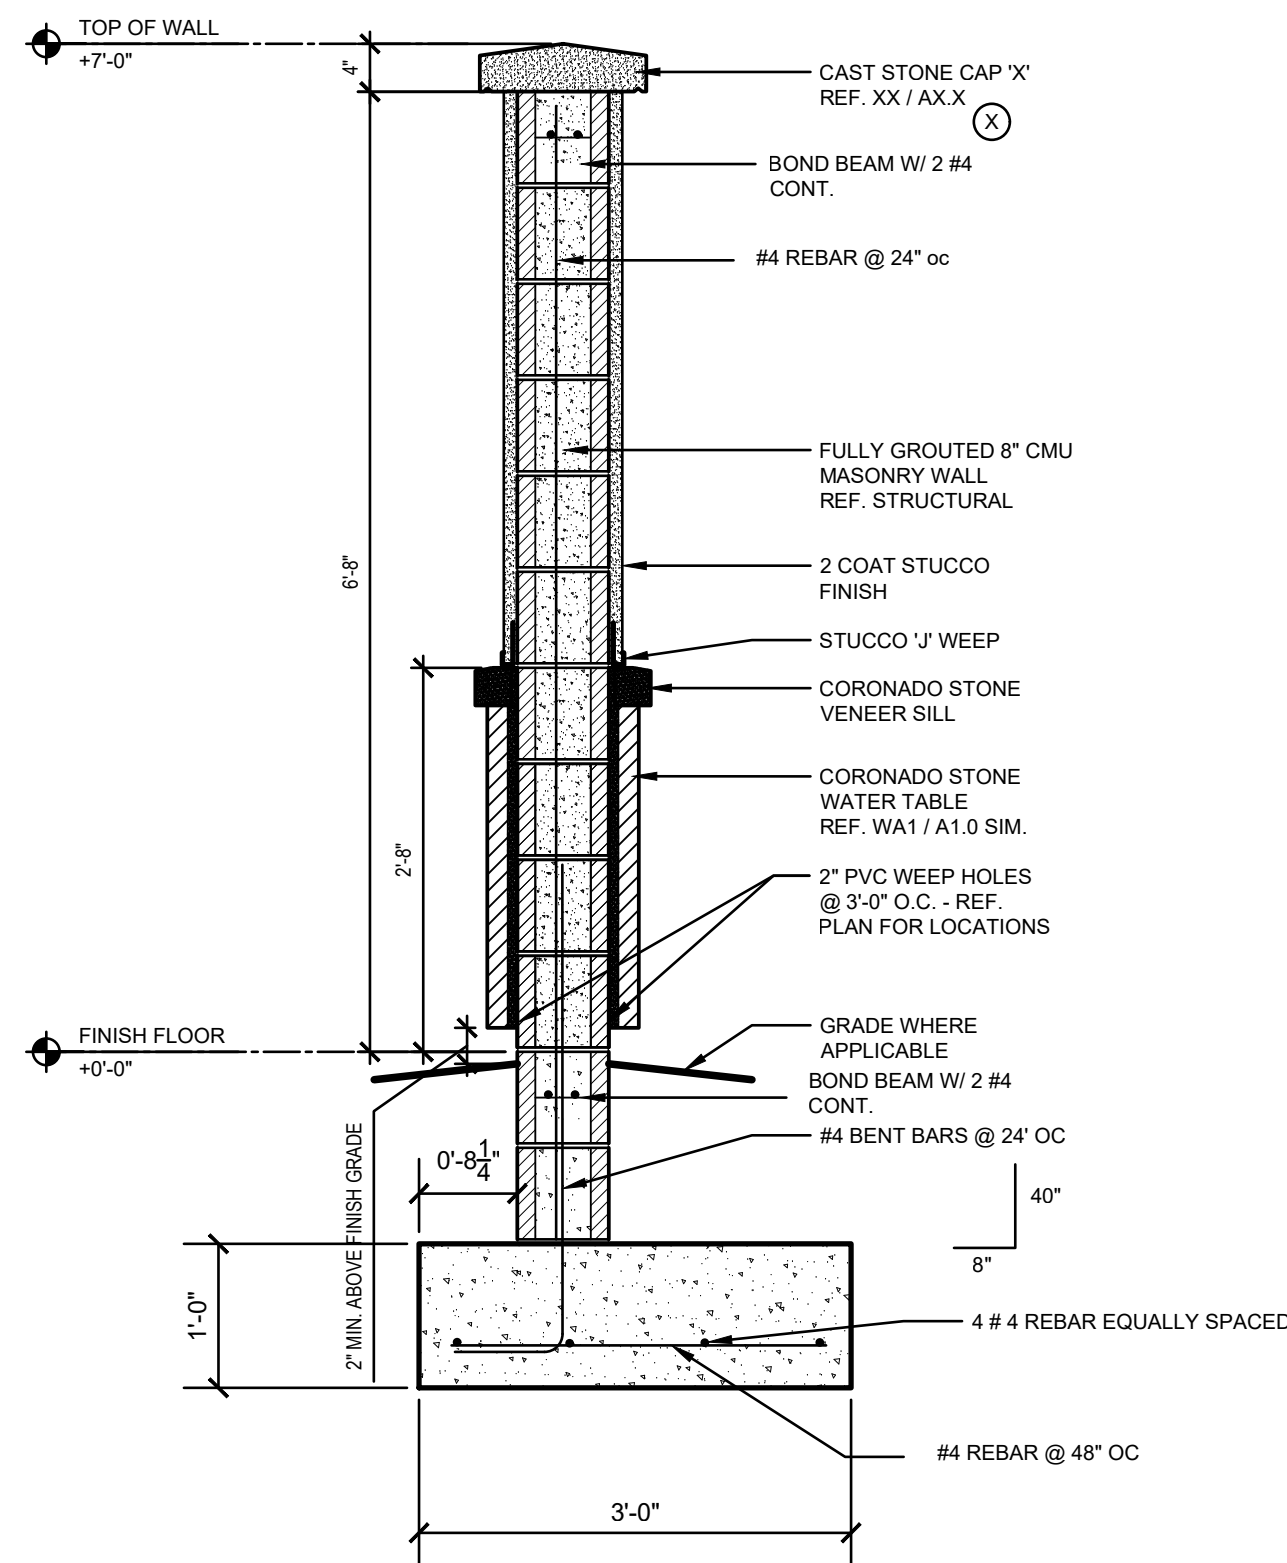


05 SECTION AT MASONRY WALL
SCALE: 3/4" = 1'-0"

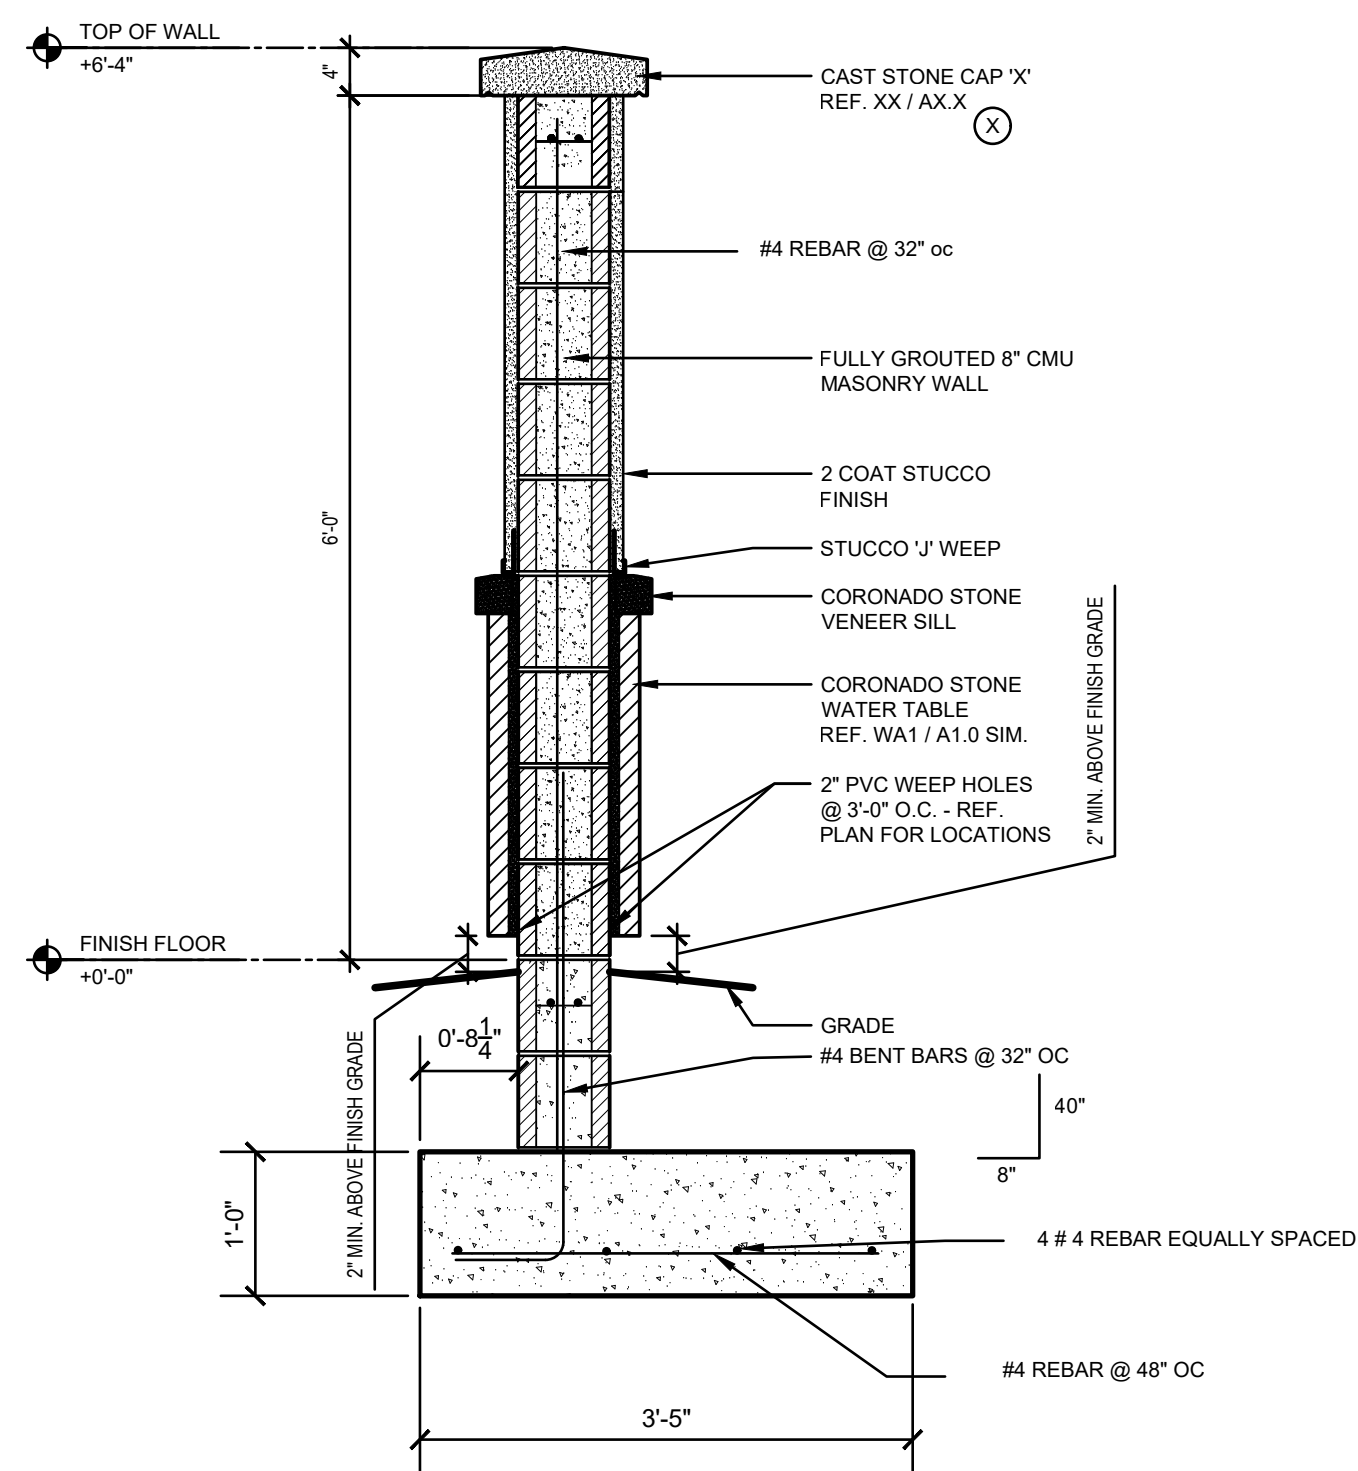


06 SECTION AT MASONRY SIGN
SCALE: 3/4" = 1'-0"

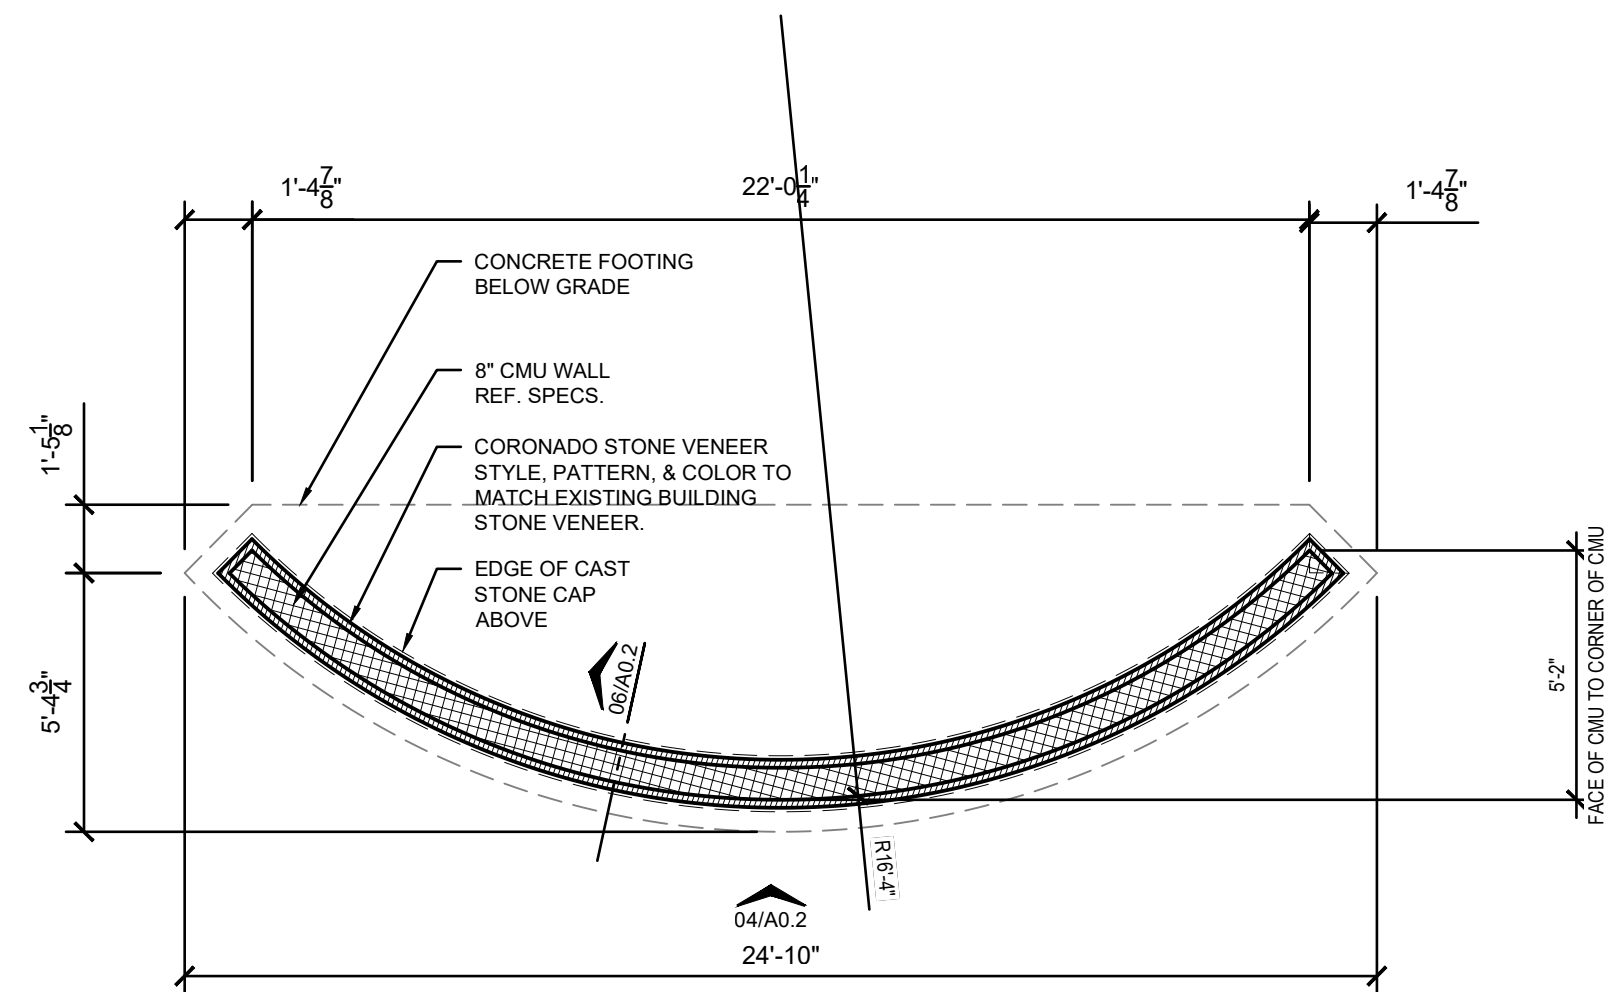


02 ENLARGED PLAN
SCALE: 1/4" = 1'-0"

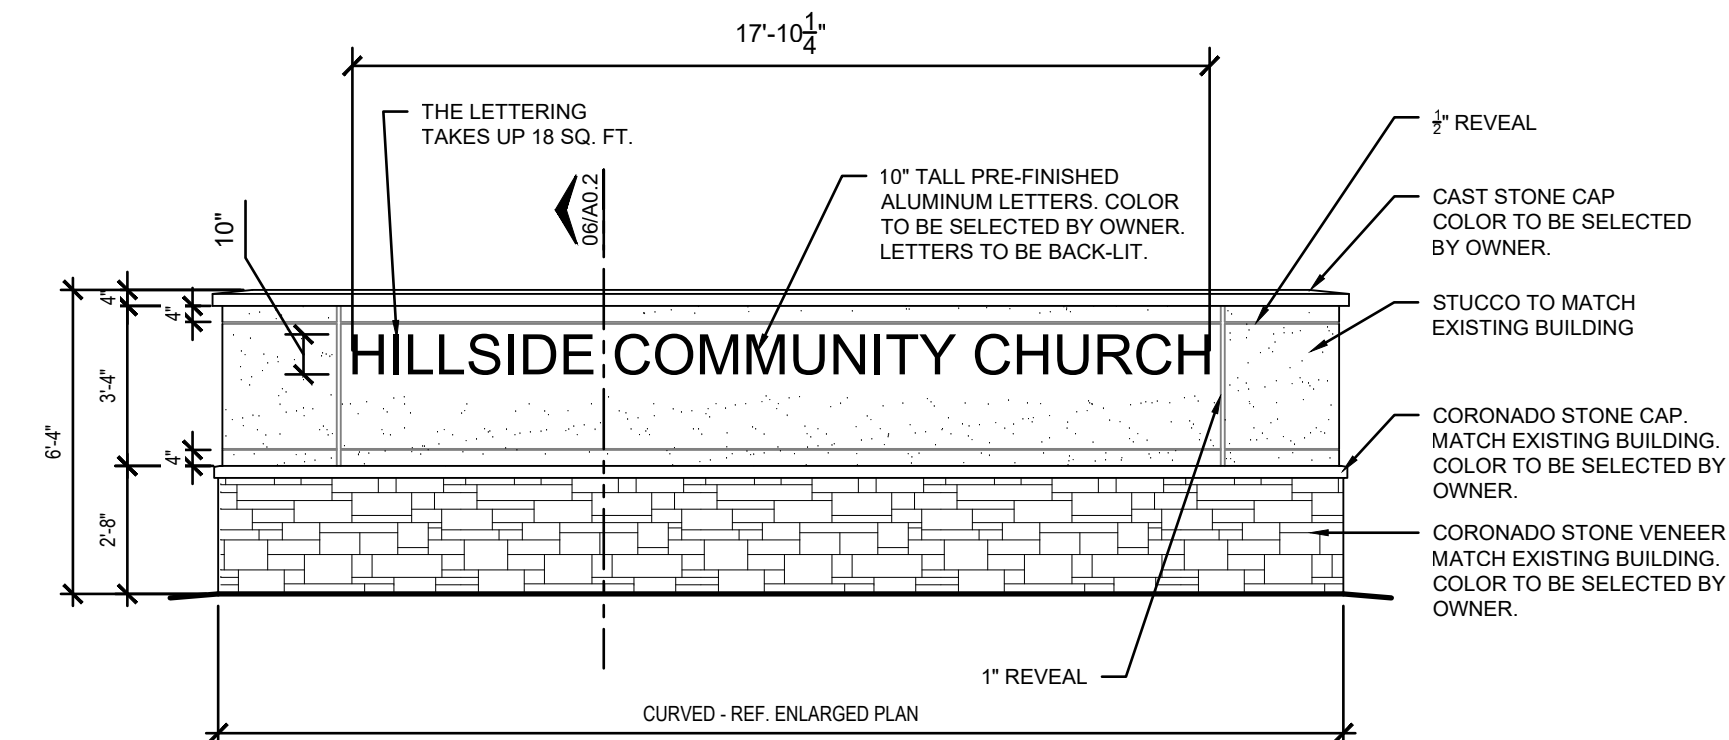


04 SIGN ELEVATION
SCALE: 1/4" = 1'-0"

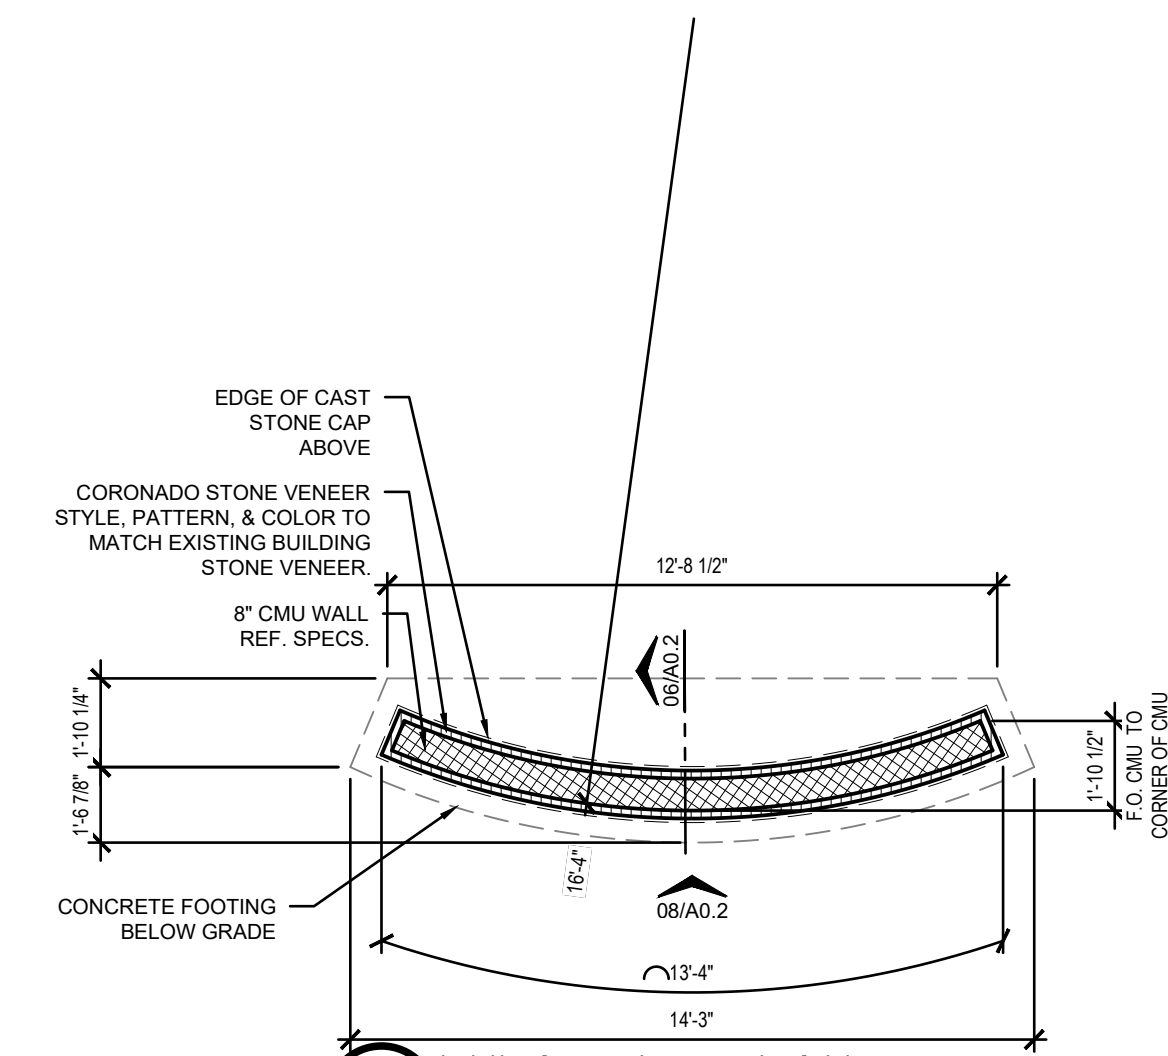

07 ENLARGED PLAN
SCALE: 1/4" = 1'-0"

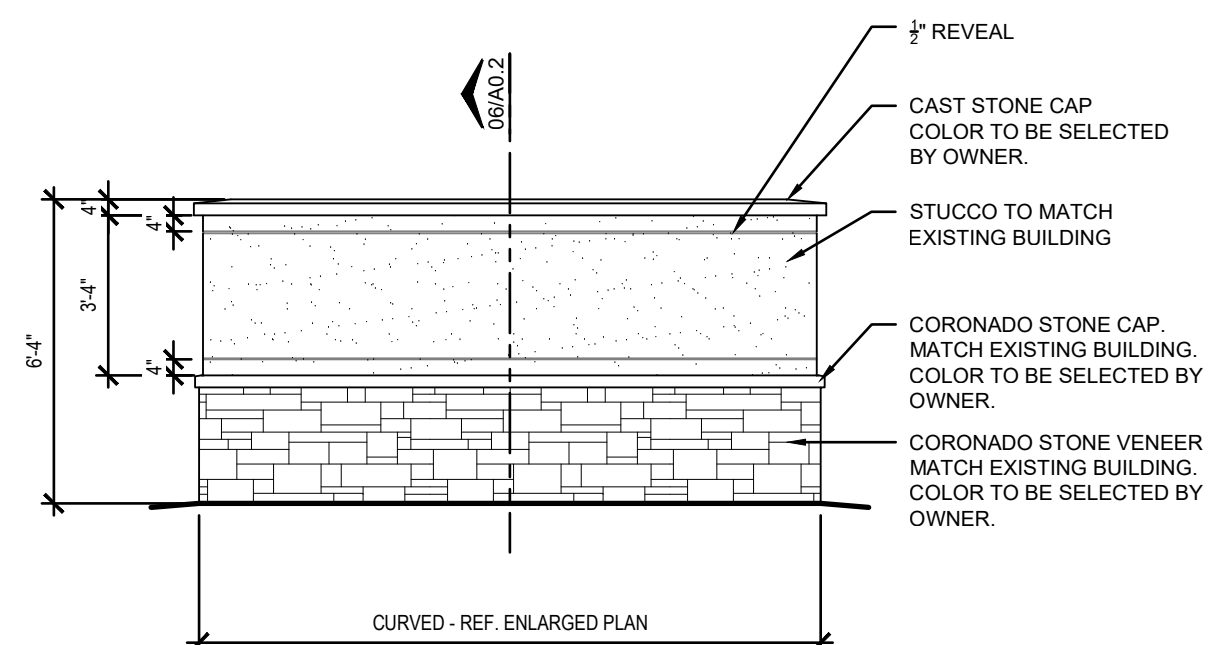

08 MONUMENT ELEVATION
SCALE: 1/4" = 1'-0"

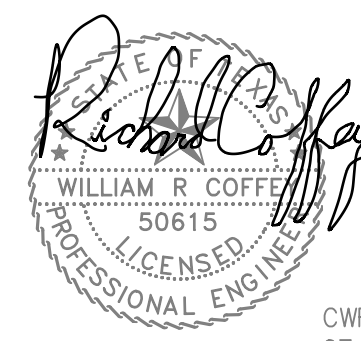

CWR
Structural Engineering
Firm Registration # F-13828
719 Monique, Cedar Hill, Tx. 75104
469-272-0164 coffeywr@hotmail.com

HILLSIDE COMMUNITY CHURCH SITE RENOVATIONS

9915 RAY WHITE RD
FORT WORTH, TX 76244

SA JOB #: 202601

DATE OF ISSUE: 08.21.2026

FOR PERMIT / BID

NO.	DATE	REVISION

A0.2

SHANKS
ARCHITECTS

901 Main Street Suite 4940 972.788.9300
Dallas, Texas 75202 (f) 214.594.5498
© 2026 Shanks Architects, Inc.


ENGINEERING PLANS

HILLSIDE COMMUNITY CHURCH SITE RENOVATIONS

City of Fort Worth, Texas

Index Of Drawings

	Cover Sheet
VO1	Topographic Survey
C1-1	Demolition Plan
C2-1	Paving Plan
C3-1	Grading Plan
C4-1	Drainage Area Map
C5-1	Erosion Control Plan
C6-1	Construction Details
L1	Landscape Plans
L2	Landscape Specifications

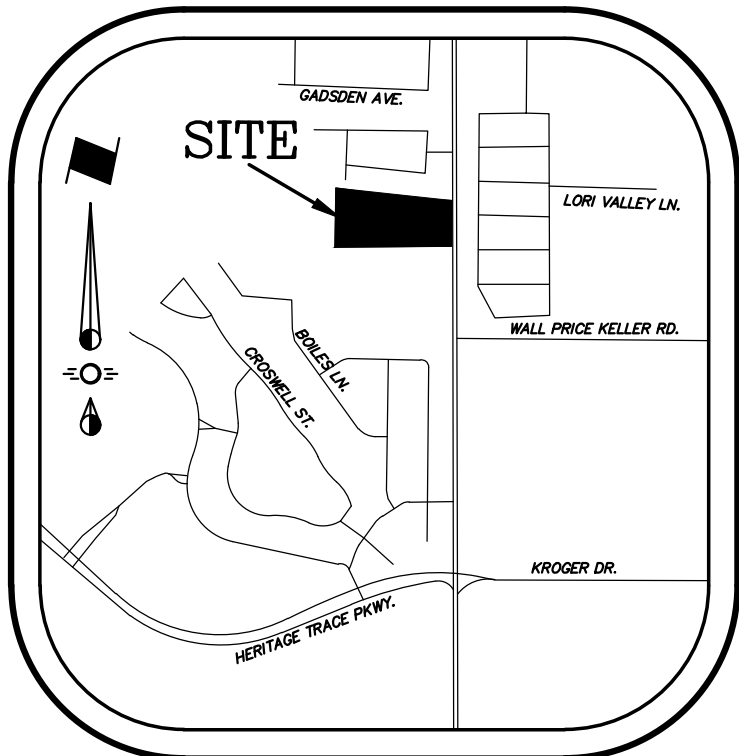


Vicinity Map
NTS


Prepared For
HILLSIDE COMMUNITY CHURCH
9915 Ray White Road
Fort Worth, Texas 76244



1720 W. Virginia Street • McKinney, Texas 75069
972.562.4409 • Texas P.E. Firm No. F-5935

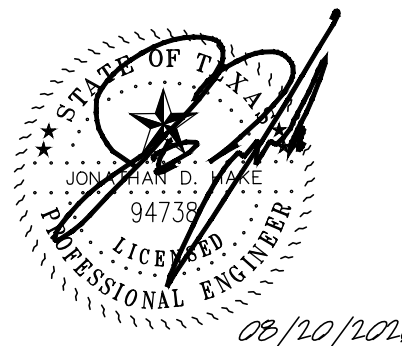

ISSUE DATES:	REVISIONS:	DATE	BY
08/20/2026			

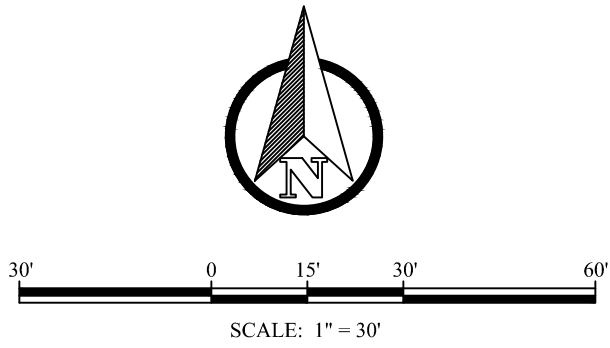

LEGEND OF SYMBOLS

- in air conditioning unit
- icv irrigation control valve
- catv cable tv
- em electric meter
- fence or guardrail
- fdc fire dept. connection
- fh fire hydrant
- bol bollard
- ad area drain
- gi grate inlet
- gv gas valve
- gm gas meter
- gw gas well
- sign
- sanitary sewer manhole
- storm water manhole
- telephone manhole
- tank fill lid
- telephone pedestal
- traffic signal pole
- utility clean out
- comm. utility cabinet
- electric utility cabinet
- comm. utility vault
- elect. utility vault
- water utility vault
- utility/service pole
- utility sign
- water shutoff
- water valve
- well
- water meter
- cable tv riser
- air release valve
- utility markings
- tree
- shrub/decorative tree
- tree with diameter < 4 in.
- contour lines


LEGEND OF LINETYPES

- SUBJECT TRACT BOUNDARY
- ADJOINING TRACT BOUNDARY
- CENTER LINE
- EASEMENT
- FENCE (WIRE/WOOD/METAL/CHAIN-LINK)
- SANITARY SEWER LINE
- STORM SEWER LINE
- WATER LINE
- GAS LINE
- UNDERGROUND FIBER OPTIC LINE
- UNDERGROUND CABLE LINE
- UNDERGROUND ELECTRIC LINE
- OVERHEAD UTILITY LINE

LEGEND OF ABBREVIATIONS

- D.R.T.C.T. DEED RECORDS, TARRANT COUNTY, TEXAS
- P.R.T.C.T. PLAT RECORDS, TARRANT COUNTY, TEXAS
- O.P.R.T.C.T. OFFICIAL PUBLIC RECORDS, TARRANT COUNTY, TEXAS
- DOC.# DOCUMENT NUMBER
- C.M. CONTROLLING MONUMENT
- SQ. FT. SQUARE FEET
- ROW RIGHT OF WAY
- CRS CAPPED REBAR SET

APPROXIMATE LOCATION OF JURISDICTION BOUNDARY AS SCALED FROM TARRANT COUNTY APPRAISAL DISTRICT GIS MAP

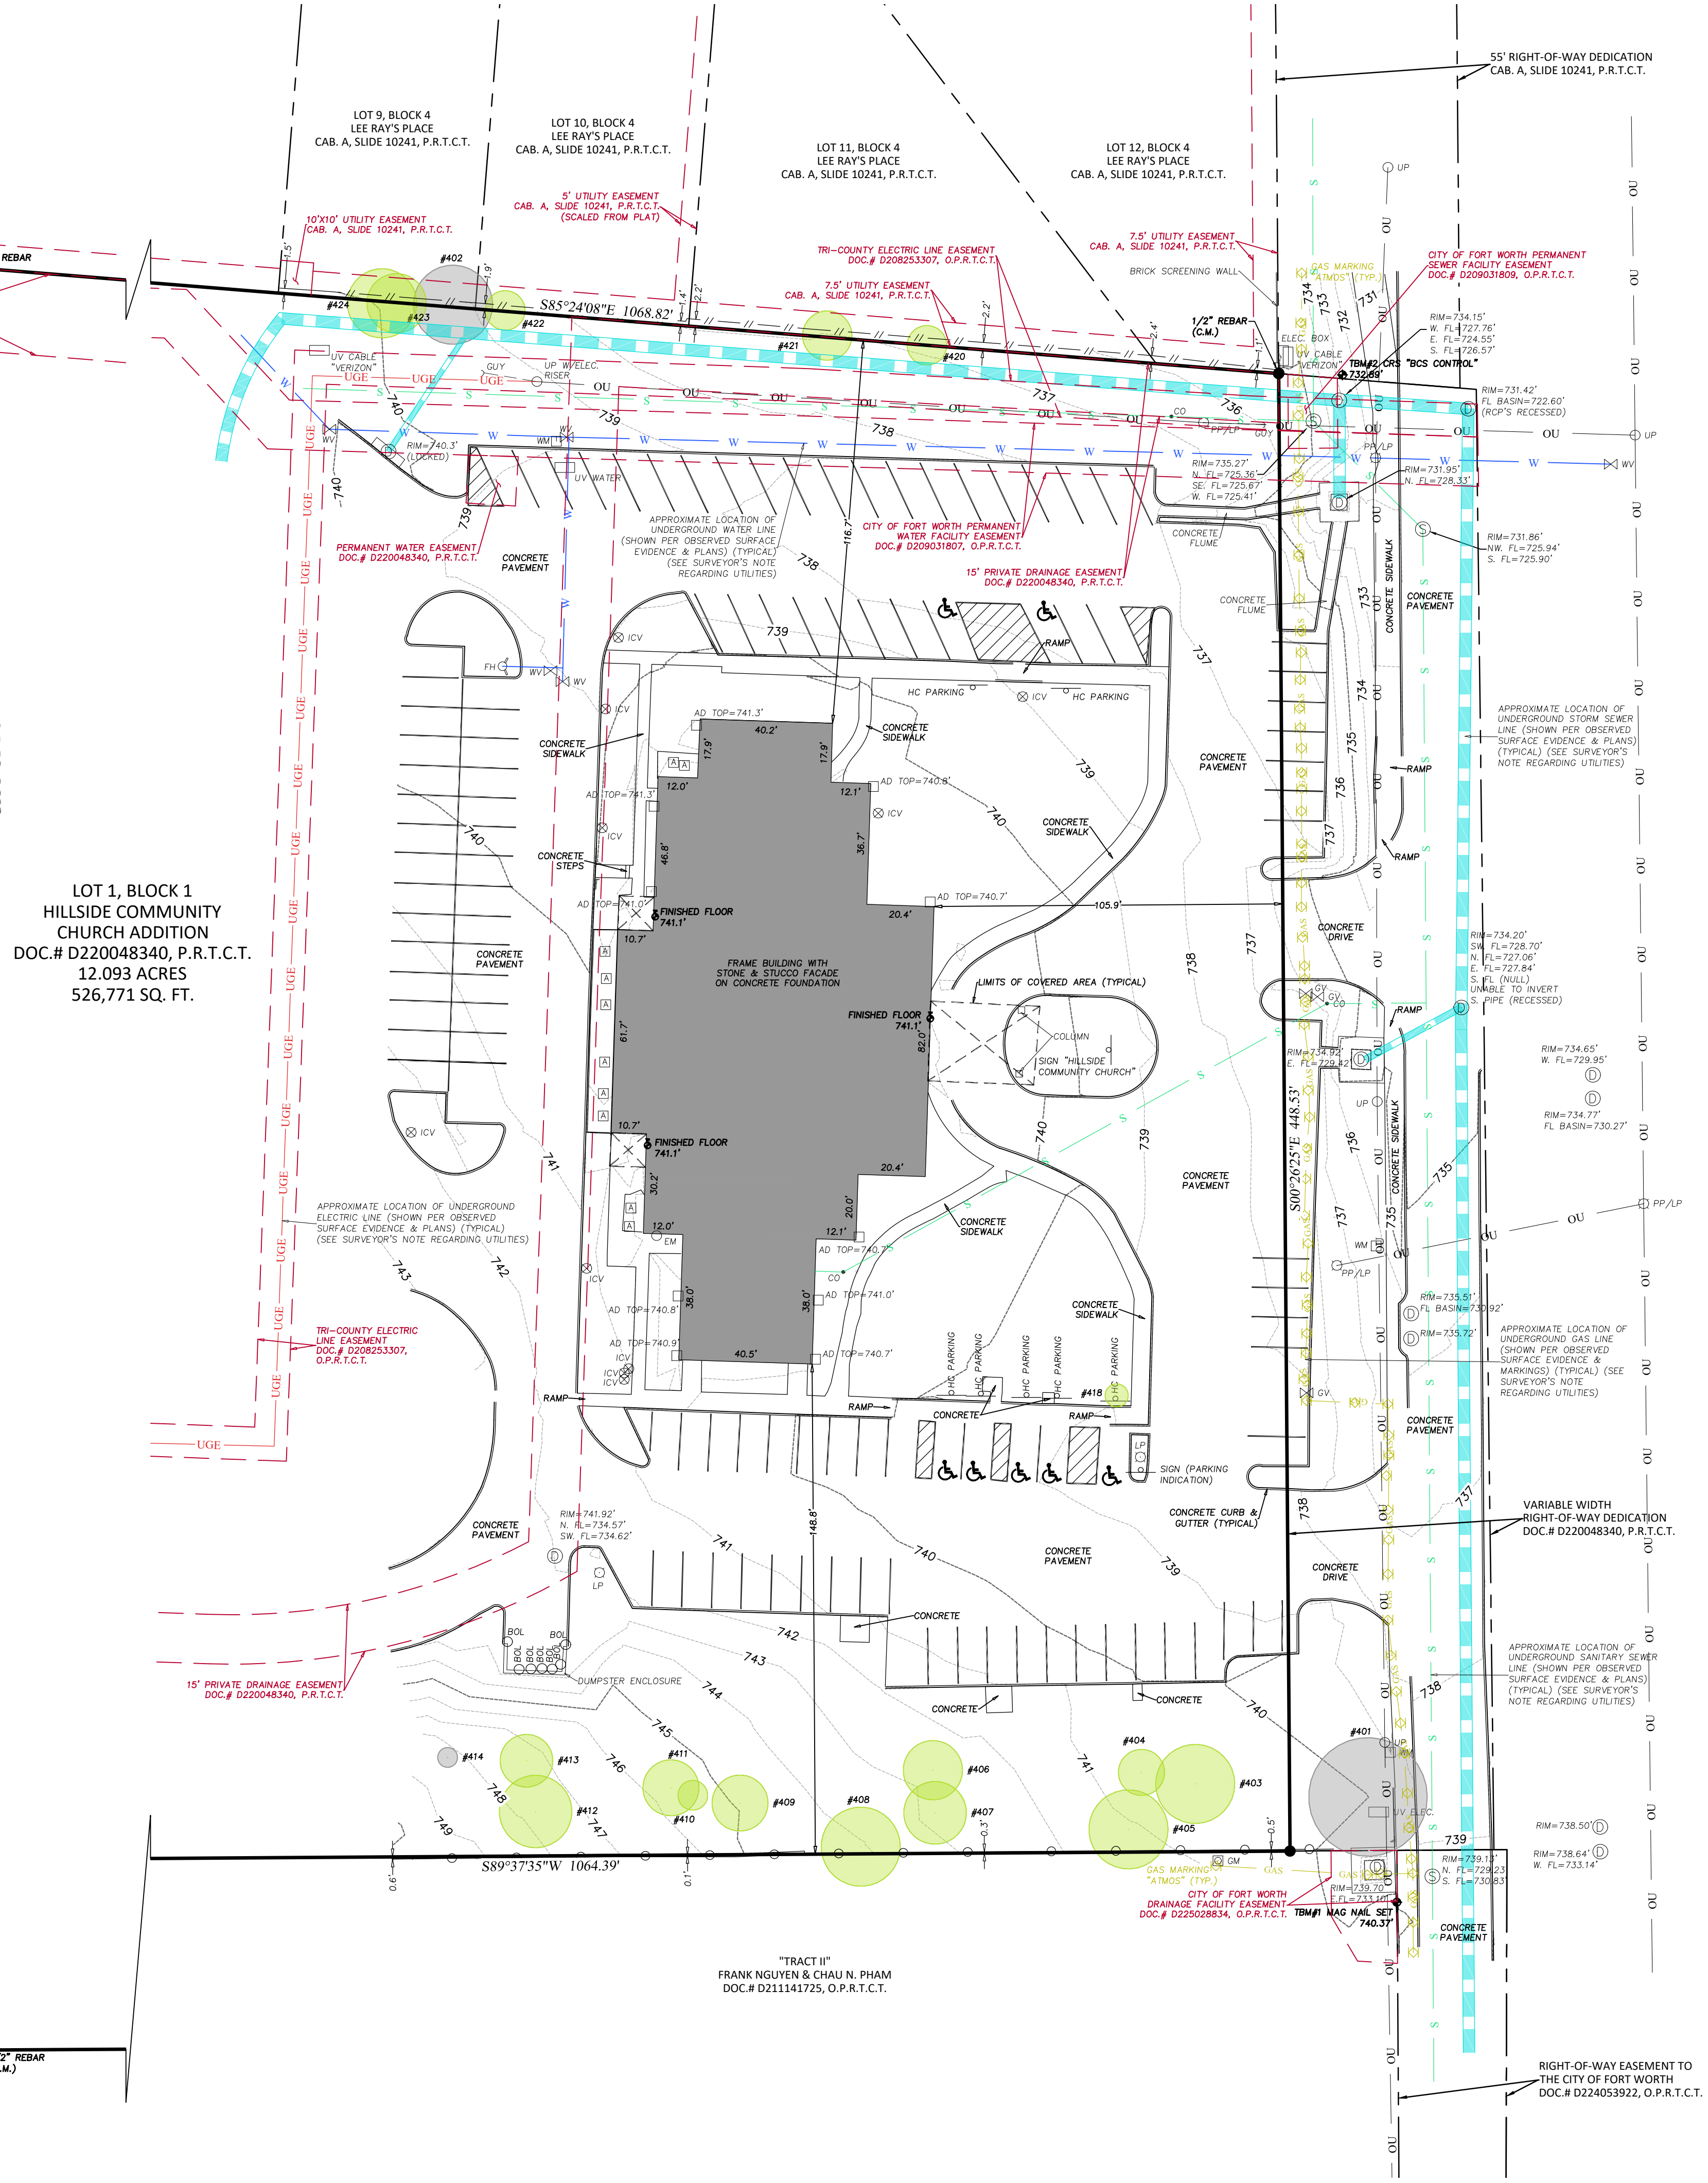

PROPERTY DESCRIPTION

BEING Lot 1 in Block 1 of Hillside Community Church Addition, an addition in the City of Fort Worth, Tarrant County, Texas, according to the plat recorded under Document Number D220048340, Plat Records, Tarrant County, Texas.

TITLE COMMITMENT NOTES

This survey was prepared without the benefit of a commitment for title insurance. The surveyor has performed no independent title search or abstract of title. Therefore, easements, agreements, or other documents, either recorded, or unrecorded may exist that affect the subject property that are not shown on this survey.

THIS IS NOT AN ALTA, CATEGORY 1A, BOUNDARY, OR OTHER TYPE OF LAND TITLE SURVEY. IT IS NOT INTENDED FOR AND SHALL NOT BE RECORDED FOR ANY PURPOSE, NOR USED, VIEWED, OR RELIED UPON FOR ANY TITLE INSURANCE, LAND TRANSFER, SUBDIVISION, OR CLOSING PURPOSE(S).

SURVEYOR'S NOTES:

- Bearings are based on the State Plane Coordinate System, Texas North Central Zone (4202) North American Datum of 1983 (NAD '83), distances are surface with a combined scale factor of 1.00012.
- This property lies within Zone "X" of the Flood Insurance Rate Map for Tarrant County, Texas and Incorporated Areas, map no. 48439C0070K, with an effective date of September 25, 2009, via scaled map location and graphic plotting.
- Monuments are found unless specifically designated as set.
- Elevations (if shown) are North American Vertical Datum of 1988 (NAVD '88).
- Pipe size(s), composition, and invert measurements are as visible from the surface, and may vary from actual conditions due to depth of manholes, and limited vision and access for measurements. Surveyor has not, and cannot physically enter the manholes, and measurements are from best available data observed from the surface. Client is hereby advised to compare any flowline, pipe size, and composition data with record documents obtained from the owner or operator of such lines, and to confirm any discrepancies prior to engaging in any design or planning based on pipe flowline elevation. Surveyor shall not be liable for any differences in actual conditions versus apparent information shown hereon.
- With respect to tree species, surveyor is not a tree expert or professional. For convenience in finding specific trees in the field only, apparent/approximate general species of trees may be shown. This apparent/approximate species is based on visual observation ONLY, to the best of surveyor field staff's knowledge. Actual species may vary. If confirmation of species, or scientific name identification is needed or desired, client is advised to retain the services of a qualified tree expert (e.g. arborist, landscape architect). Any species identification shown shall be regarded as preliminary and approximate, and shall not be used, viewed, or relied upon for design, planning, preservation, or mitigation purposes.

NOTE REGARDING UTILITIES

Lacking excavation, the exact location of underground features cannot be accurately, completely, and reliably depicted. In addition, in some jurisdictions, 811 or other similar utility locate requests from surveyors may be ignored or result in an incomplete response. Where additional or more detailed information is required, the client is advised that excavation may be necessary. Underground utility investigation was limited to the source(s) described below, and there may exist underground utilities that are not shown hereon.

Utility locations are per observed surface evidence and the below sources only:

DigTess/811 - Ticket #2664880980 (05/28/2026)

Per 811, the following utilities were notified, and markings observed per below:

ANO (Atmos MidTx): Reported "Located". Markings observed.

FN2 (Oncor Electric): Reported "Located". No markings observed.

TCN (Tri-County Electric): No response reported. No markings observed.

UFTRTX01 (Frontier): Reported "clear/no conflict". No markings observed.

ABOVE02 (Zayo Group): Reported "clear/no conflict". No water markings observed.

FORTW01 (CoFW Water): Reported "clear/no conflict". No markings observed.

CCTXN (Spectrum): Reported "clear/no conflict". No markings observed.

MTO (Millennium Telecom): Reported "clear/no conflict". No markings observed.

Maps/Plans: Maps and construction plans provided by the City of Fort Worth through Public Information Request (Ref.# R005579). Detailed below:

Water/Sewer/Storm GIS map provided by City

Water/Sewer/Storm/ shown on utility and construction plans provided by City.

TREE TABLE

TAG#	DIAMETER (INCHES)	APPROX./APPARENT SPECIES
401	36	OAK (POSSIBLY DEAD)
402	24	OAK (POSSIBLY DEAD)
403	24 (MULTI-TRUNK)	OAK
404	14	OAK
405	24	OAK
406	18	OAK
407	19	OAK
408	24	OAK
409	17	OAK
410	9	HICKORY
411	17 (MULTI-TRUNK)	OAK
412	22 (MULTI-TRUNK)	OAK
413	16	OAK
414	6	OAK (POSSIBLY DEAD)
418	7	CRP
420	12	OAK
421	15	OAK
422	12	OAK
423	18 (MULTI-TRUNK)	OAK
424	21 (MULTI-TRUNK)	OAK

TOPOGRAPHIC & TREE SURVEY

LOT 1, BLOCK 1, HILLSIDE COMMUNITY CHURCH ADDITION
CITY OF FORT WORTH, TARRANT COUNTY, TEXAS




BCS
BARTON CHAPA
SURVEYING
3601 NE. Loop 820
Fort Worth, TX 76137
Phone: 817-864-1957
info@bcsdfw.com
TBPLS Firm #10194474

JOB NO.	2022.XXX.XXX
DRAWN:	BCS
CHECKED:	JHB
TABLE OF REVISIONS	
DATE	SUMMARY

HILLSIDE
COMMUNITY
CHURCH

FORT WORTH,
TEXAS

SHEET:
V01
TOPOGRAPHIC &
TREE SURVEY

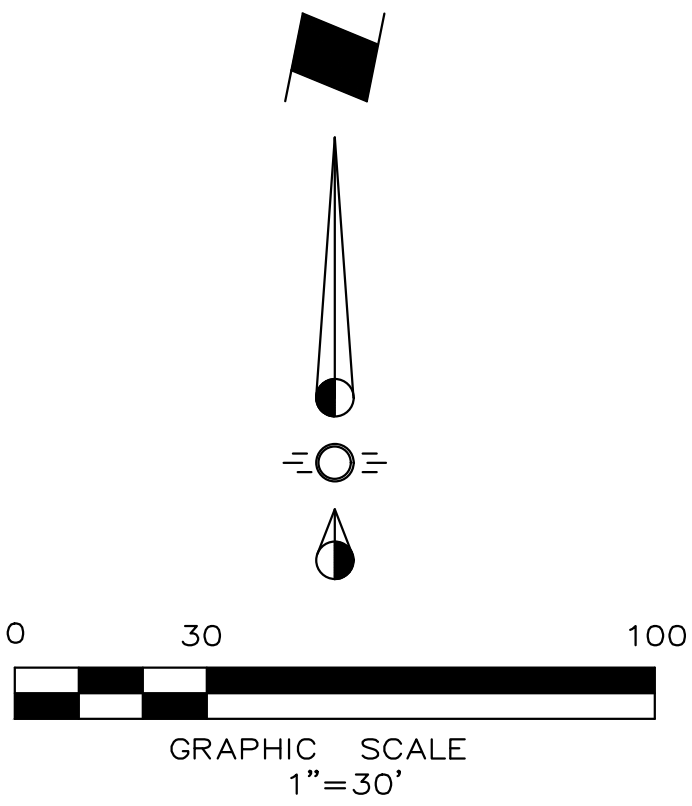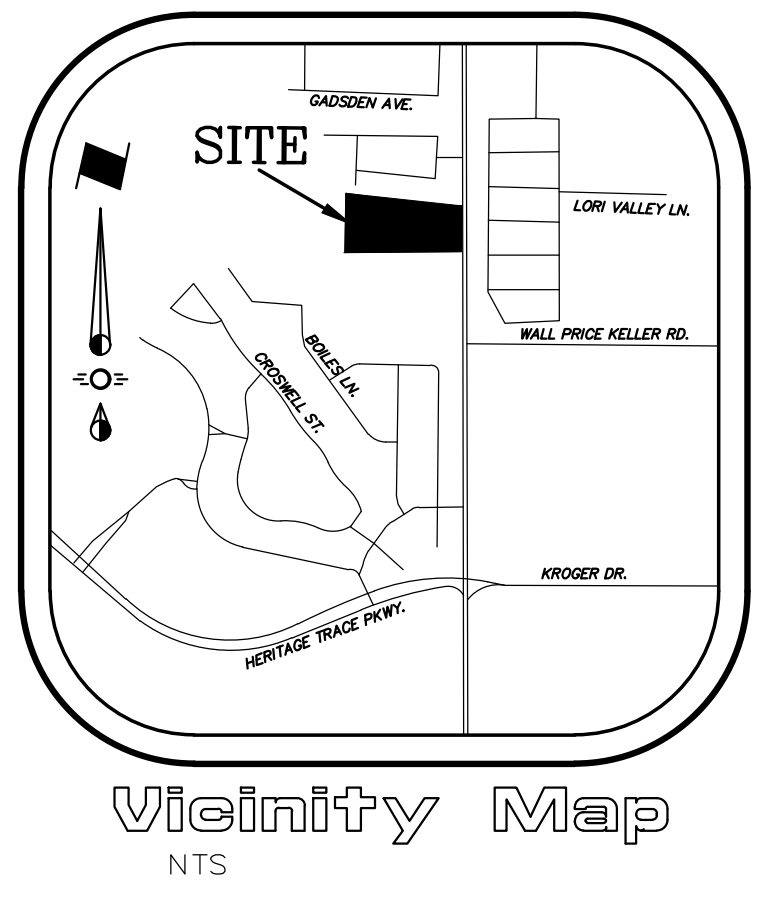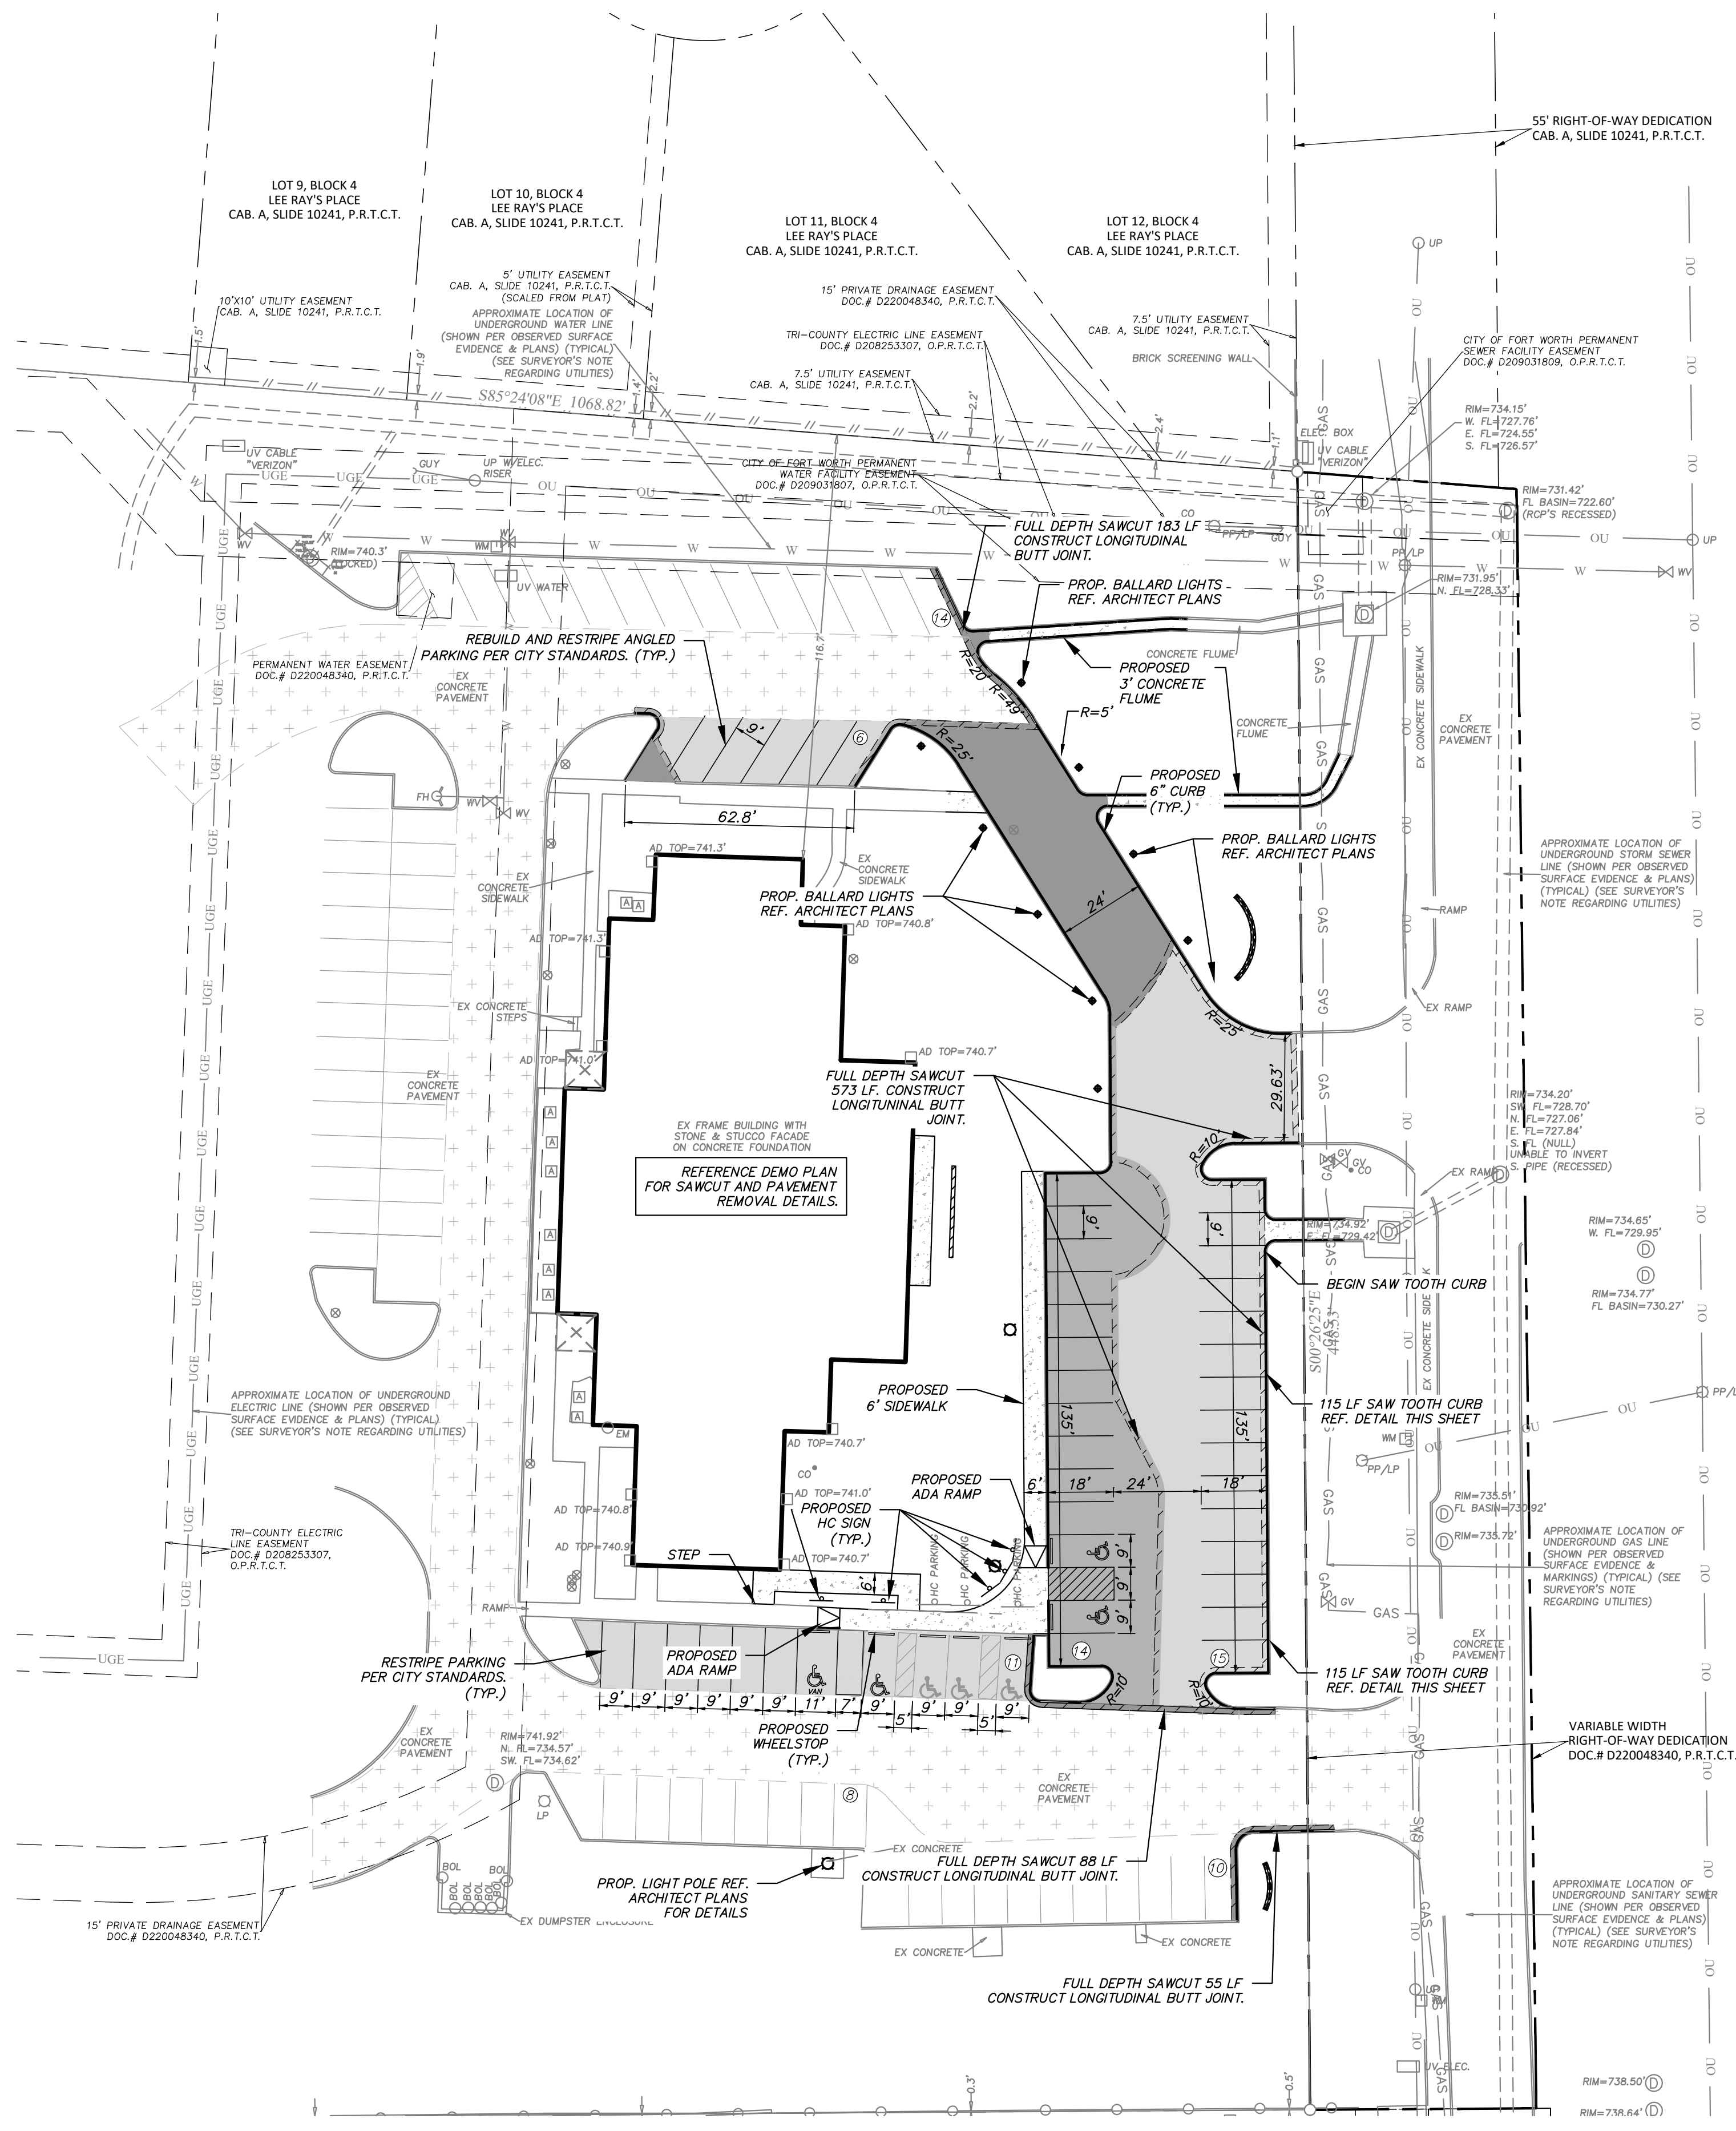


FIRE LANE NOTES

1. All fire lanes, striped per City standards, and fire hydrants shall be completed and in working order PRIOR TO vertical construction. Fire lane markings shall be as follows: curb markings – painted in red traffic paint from the top of the seam of the curb to a point even with the driving surface (top and face of curb); pavement markings – painted in red traffic paint six inches in width to show the boundaries of the lane. The words "NO PARKING – FIRE LANE" shall appear in four inch white letters at 25-foot intervals.
2. Maximum grade change for a fire lane is 6%, and 5% for all transitions.

GENERAL NOTES


1. All materials and construction shall be in accordance with the City Standard Specifications and Construction Standards, and Standard Specifications for Public Works Construction prepared by the North Central Texas Council of Governments (Latest Revision).
2. Existing utilities are shown schematically and are for the Contractor's guidance only. The location and/or elevation of existing utilities as shown on these plans are based on records of the various utility companies, and, where possible, measurements taken in the field. The Contractor must call the appropriate utility company at least 72 hours prior to any excavation to request exact field location of utilities.
3. Contractor shall be responsible for protecting all existing improvements in the construction of this project. The Contractor is responsible for repairs of damage to any existing improvements during construction. Repairs shall be equal to or better than condition prior to construction.
4. All onsite paving dimensions are to the FACE of curb, where applicable, unless noted otherwise.
5. All curb radii are 3' unless noted otherwise.
6. All parking spaces are 9' x 18', unless noted otherwise.
7. Fire lanes shall be striped in accordance with the City Standards.
8. Parking stripes shall be 4" wide, spray applied white vinyl acrylic paint. Paint shall be applied in two coats to a clean, dry surface using template or striping machine.
9. All concrete pavement shall be sawcut at a maximum spacing of 15' OCEW.

- LEGEND**
- Existing Firelane
 - Sawcut Line. Remove & Dispose Concrete Curb & Gutter
 - SIDEWALK**
4" 4,000 psi Reinforced Concrete Sidewalk with #3 rebar @ 18" O.C.E.W.
 - FIRELANE/HEAVY AREA**
6" 4,000 psi Reinforced Concrete Pavement with #4 rebar @ 24" O.C.E.W. (4% – 6% Entrained Air)
 - DRIVE AISLE/PARKING AREA**
5" 4,000 psi Reinforced Concrete Pavement with #4 rebar @ 24" O.C.E.W. (4% – 6% Entrained Air)
 - Existing Pavement to Remain
 - Subgrade:**
6" Lime Stabilized Subgrade TxDot Item 260–(6% or 27lbs Per S.Y.) Compacted to 95% Maximum Dry Density at or above Optimum Moisture
 - Existing Fire Hydrant
 - Proposed Fire Hydrant
 - BFR Barrier Free Ramp
 - Expansion Joint



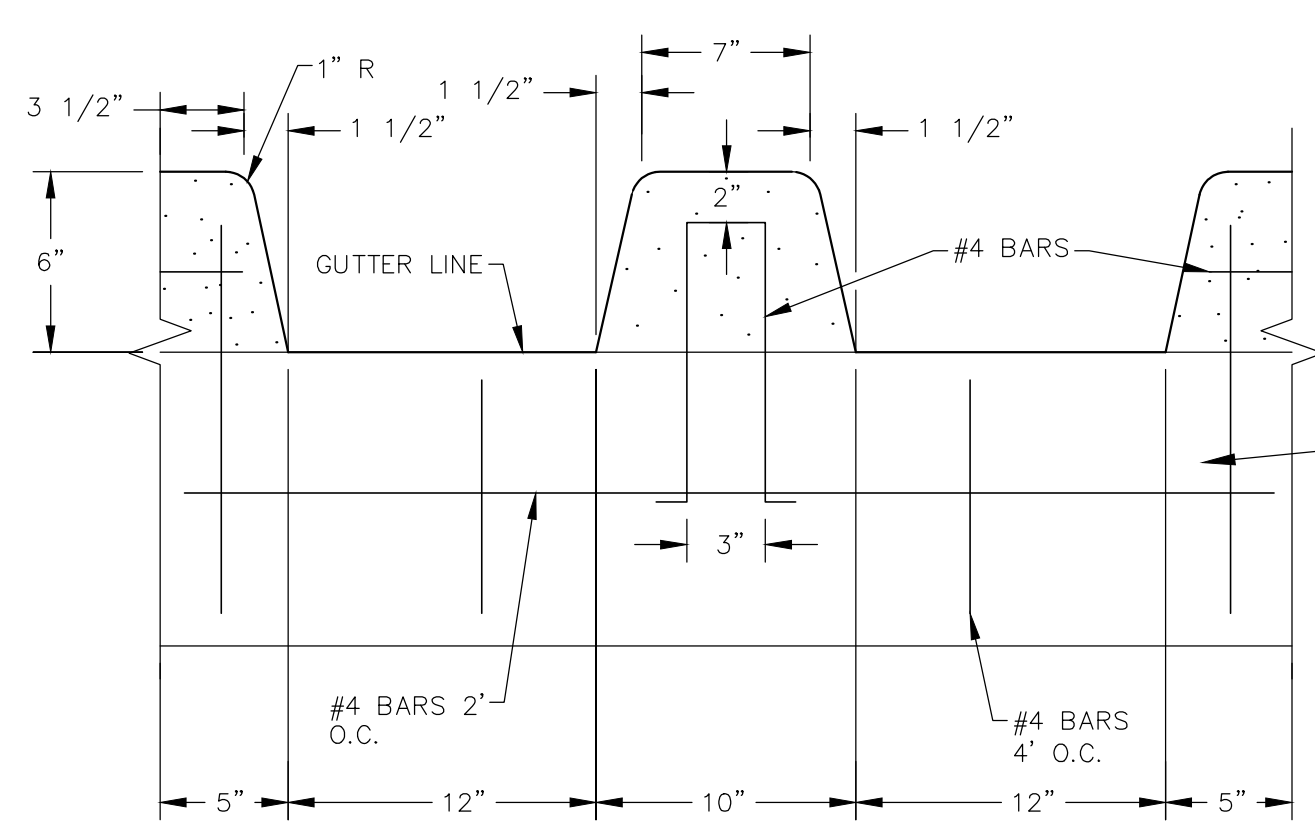


SAW TOOTH CURB DETAIL
N.T.S. PAVEMENT SUBGRADE AS SPECIFIED ON PLANS



Issue Date	Description	 1720 W. Virginia Street • McKinney, Texas 75069 972.562.4409 • Texas P.E. Firm No. F-5935		 08/20/2026		PAVING PLAN HILLSIDE CHURCH SITE RENOVATIONS HILLSIDE COMMUNITY CHURCH CITY OF FORT WORTH, TEXAS		Sheet No.
1	08/20/2026							C2-1
2								
3								
4								
5								
6								Project No. 26073

HILLSIDE COMMUNITY CHURCH RENOVATIONS

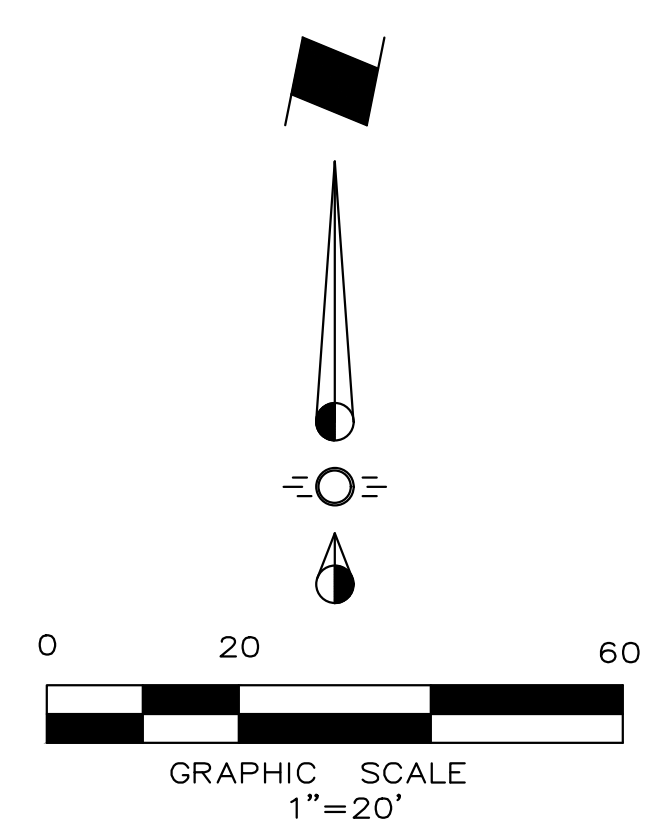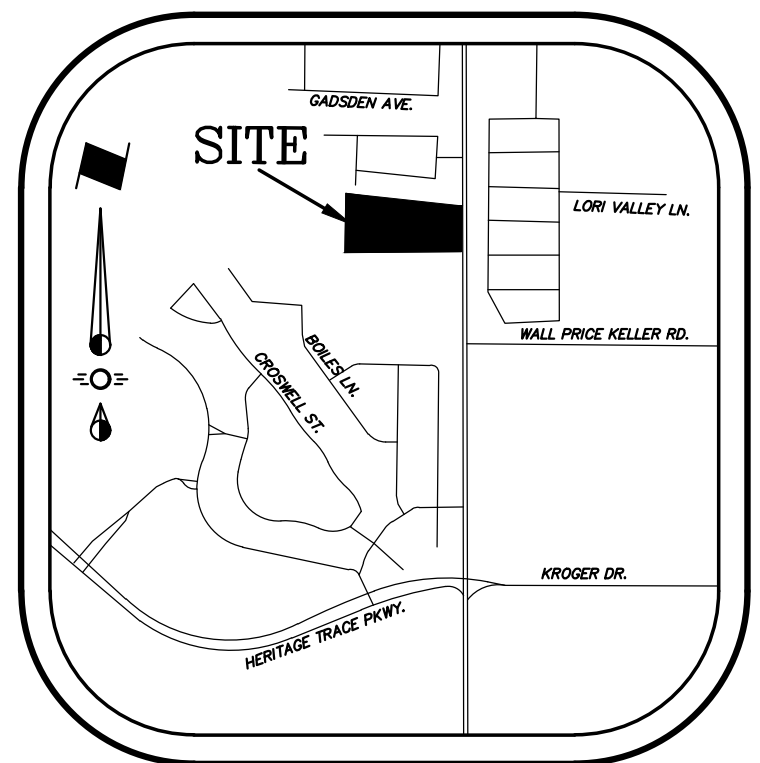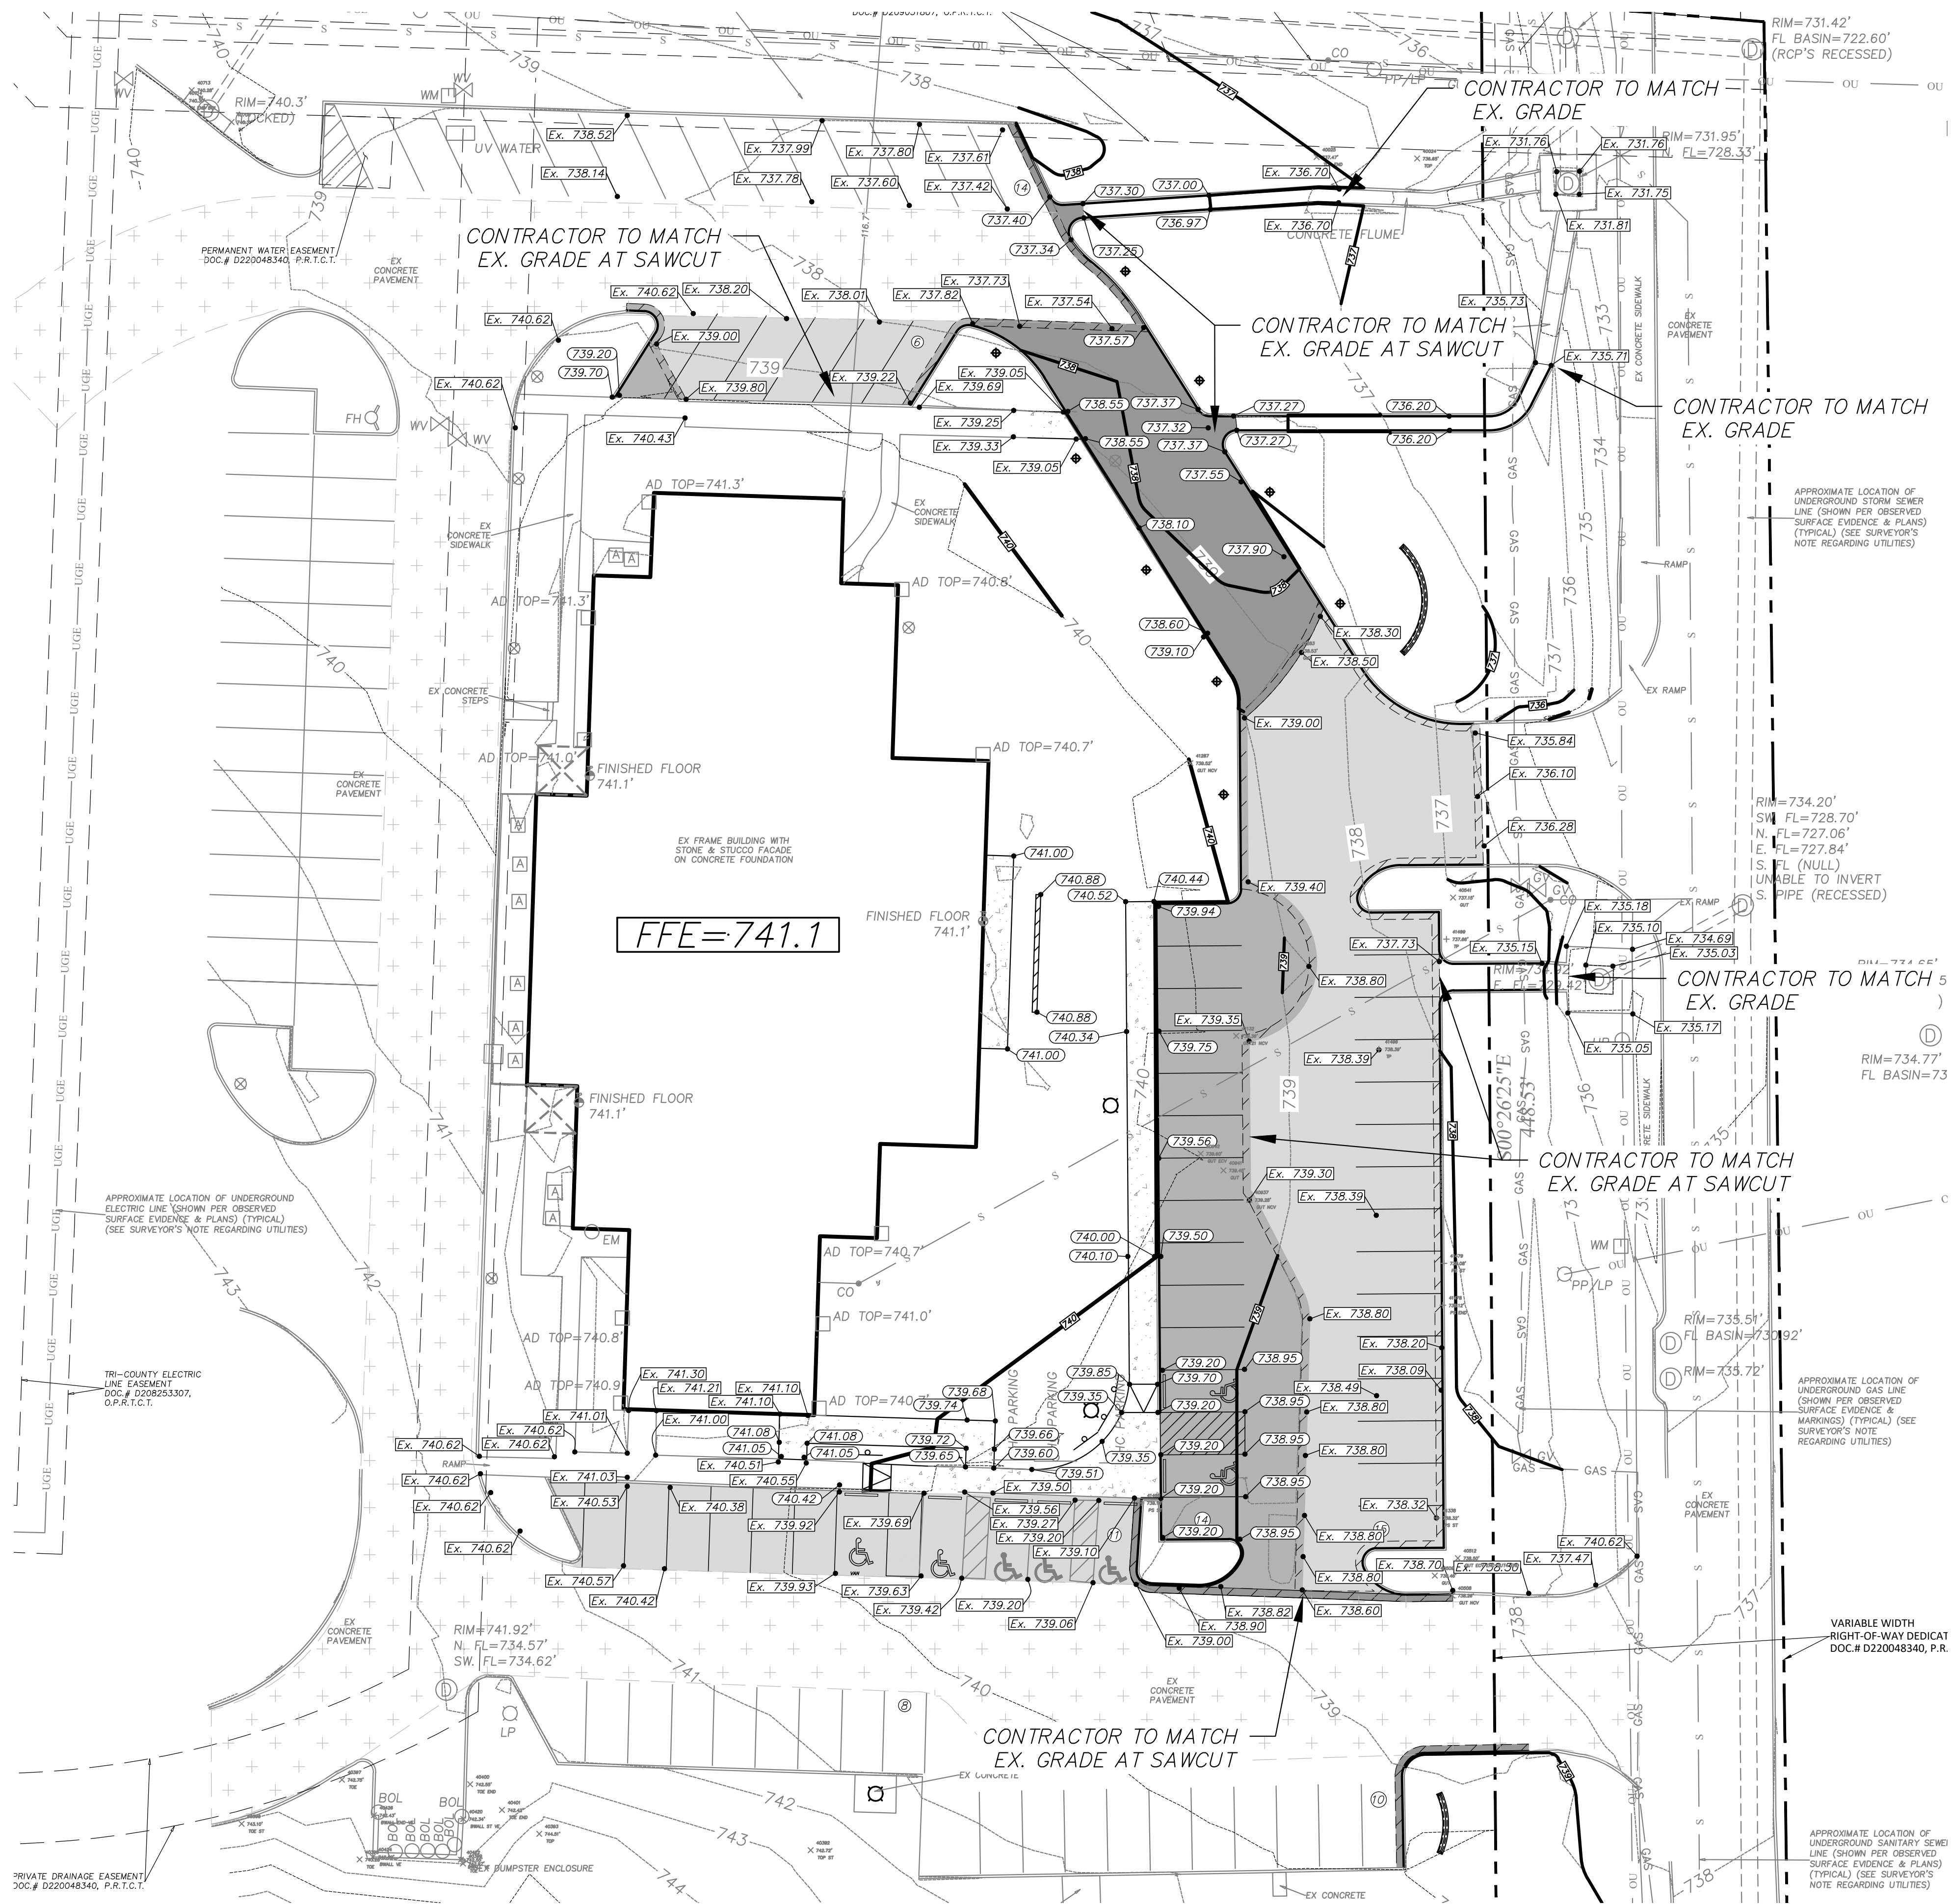

GRADING NOTES

1. All materials and construction shall be in accordance with the City Standard Specifications and Construction Standards, and Standard Specifications for Public Works Construction prepared by North Central Texas Council of Governments (Latest Revision).
2. Existing utilities are shown schematically and are for the contractors guidance only. The location and/or elevation of existing utilities as shown on these plans are based on records of the various utility companies, and, where possible, measurements taken in the field. The contractor must call the appropriate utility company at least 72 hours prior to any excavation to request exact field location of utilities.
3. The contractor shall be responsible for protecting all existing improvements in the construction of this project. The contractor is responsible for repairs of damage to any existing improvements during construction. Repairs shall be equal to or better than condition prior to construction.
4. All pavement subgrade shall be compacted to at least 95% Standard Proctor Density at or slightly above Optimum. All work shall be done in accordance with the Geotechnical Report.
5. Erosion Control shall be in place prior to the disturbance of any existing surface.
6. All sidewalk slopes shall conform to A.D.A. requirements as follows: 1:20 longitudinal (along the walk) 1:50 transverse (across the walk)
7. All proposed grades in landscaped areas are finished grade elevations. Contractor to allow for seeding or sodding of these areas.
8. Proposed spot elevations are top of pavement elevations unless noted otherwise.

LEGEND			
	Existing Spot Elevation		Proposed Contour
	Proposed Spot Elevation		Existing Contour
	Flow Arrow		Valley
	Finished Floor Elevation		Highpoint





STOP!
CALL BEFORE YOU DIG



(@ least 72 hours prior to digging)

Issue Date	Description	 1720 W. Virginia Street 972.562.4409 McKinney, Texas 75069 Texas P.E. Firm No. F-5935		GRADING PLAN	Sheet No.
1	08/20/2026			HILLSIDE CHURCH SITE RENOVATIONS	C3-1
2				HILLSIDE COMMUNITY CHURCH	
3				CITY OF FORT WORTH, TEXAS	
4					Project No.
5					26073
6					

HILLSIDE COMMUNITY CHURCH RENOVATIONS

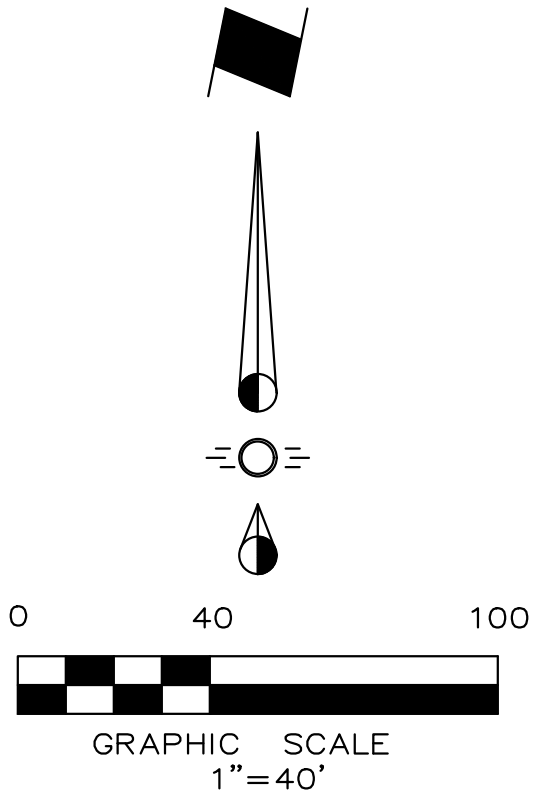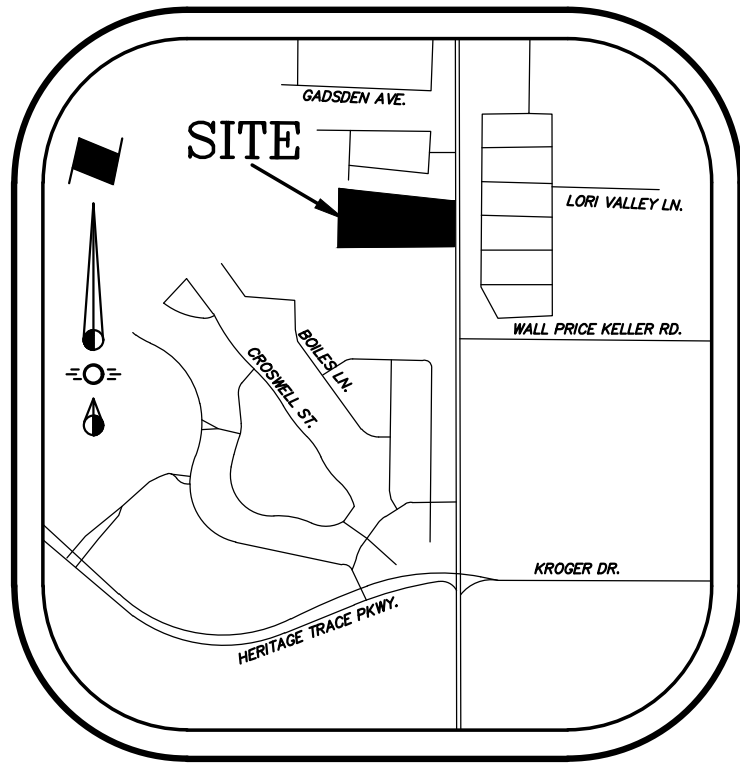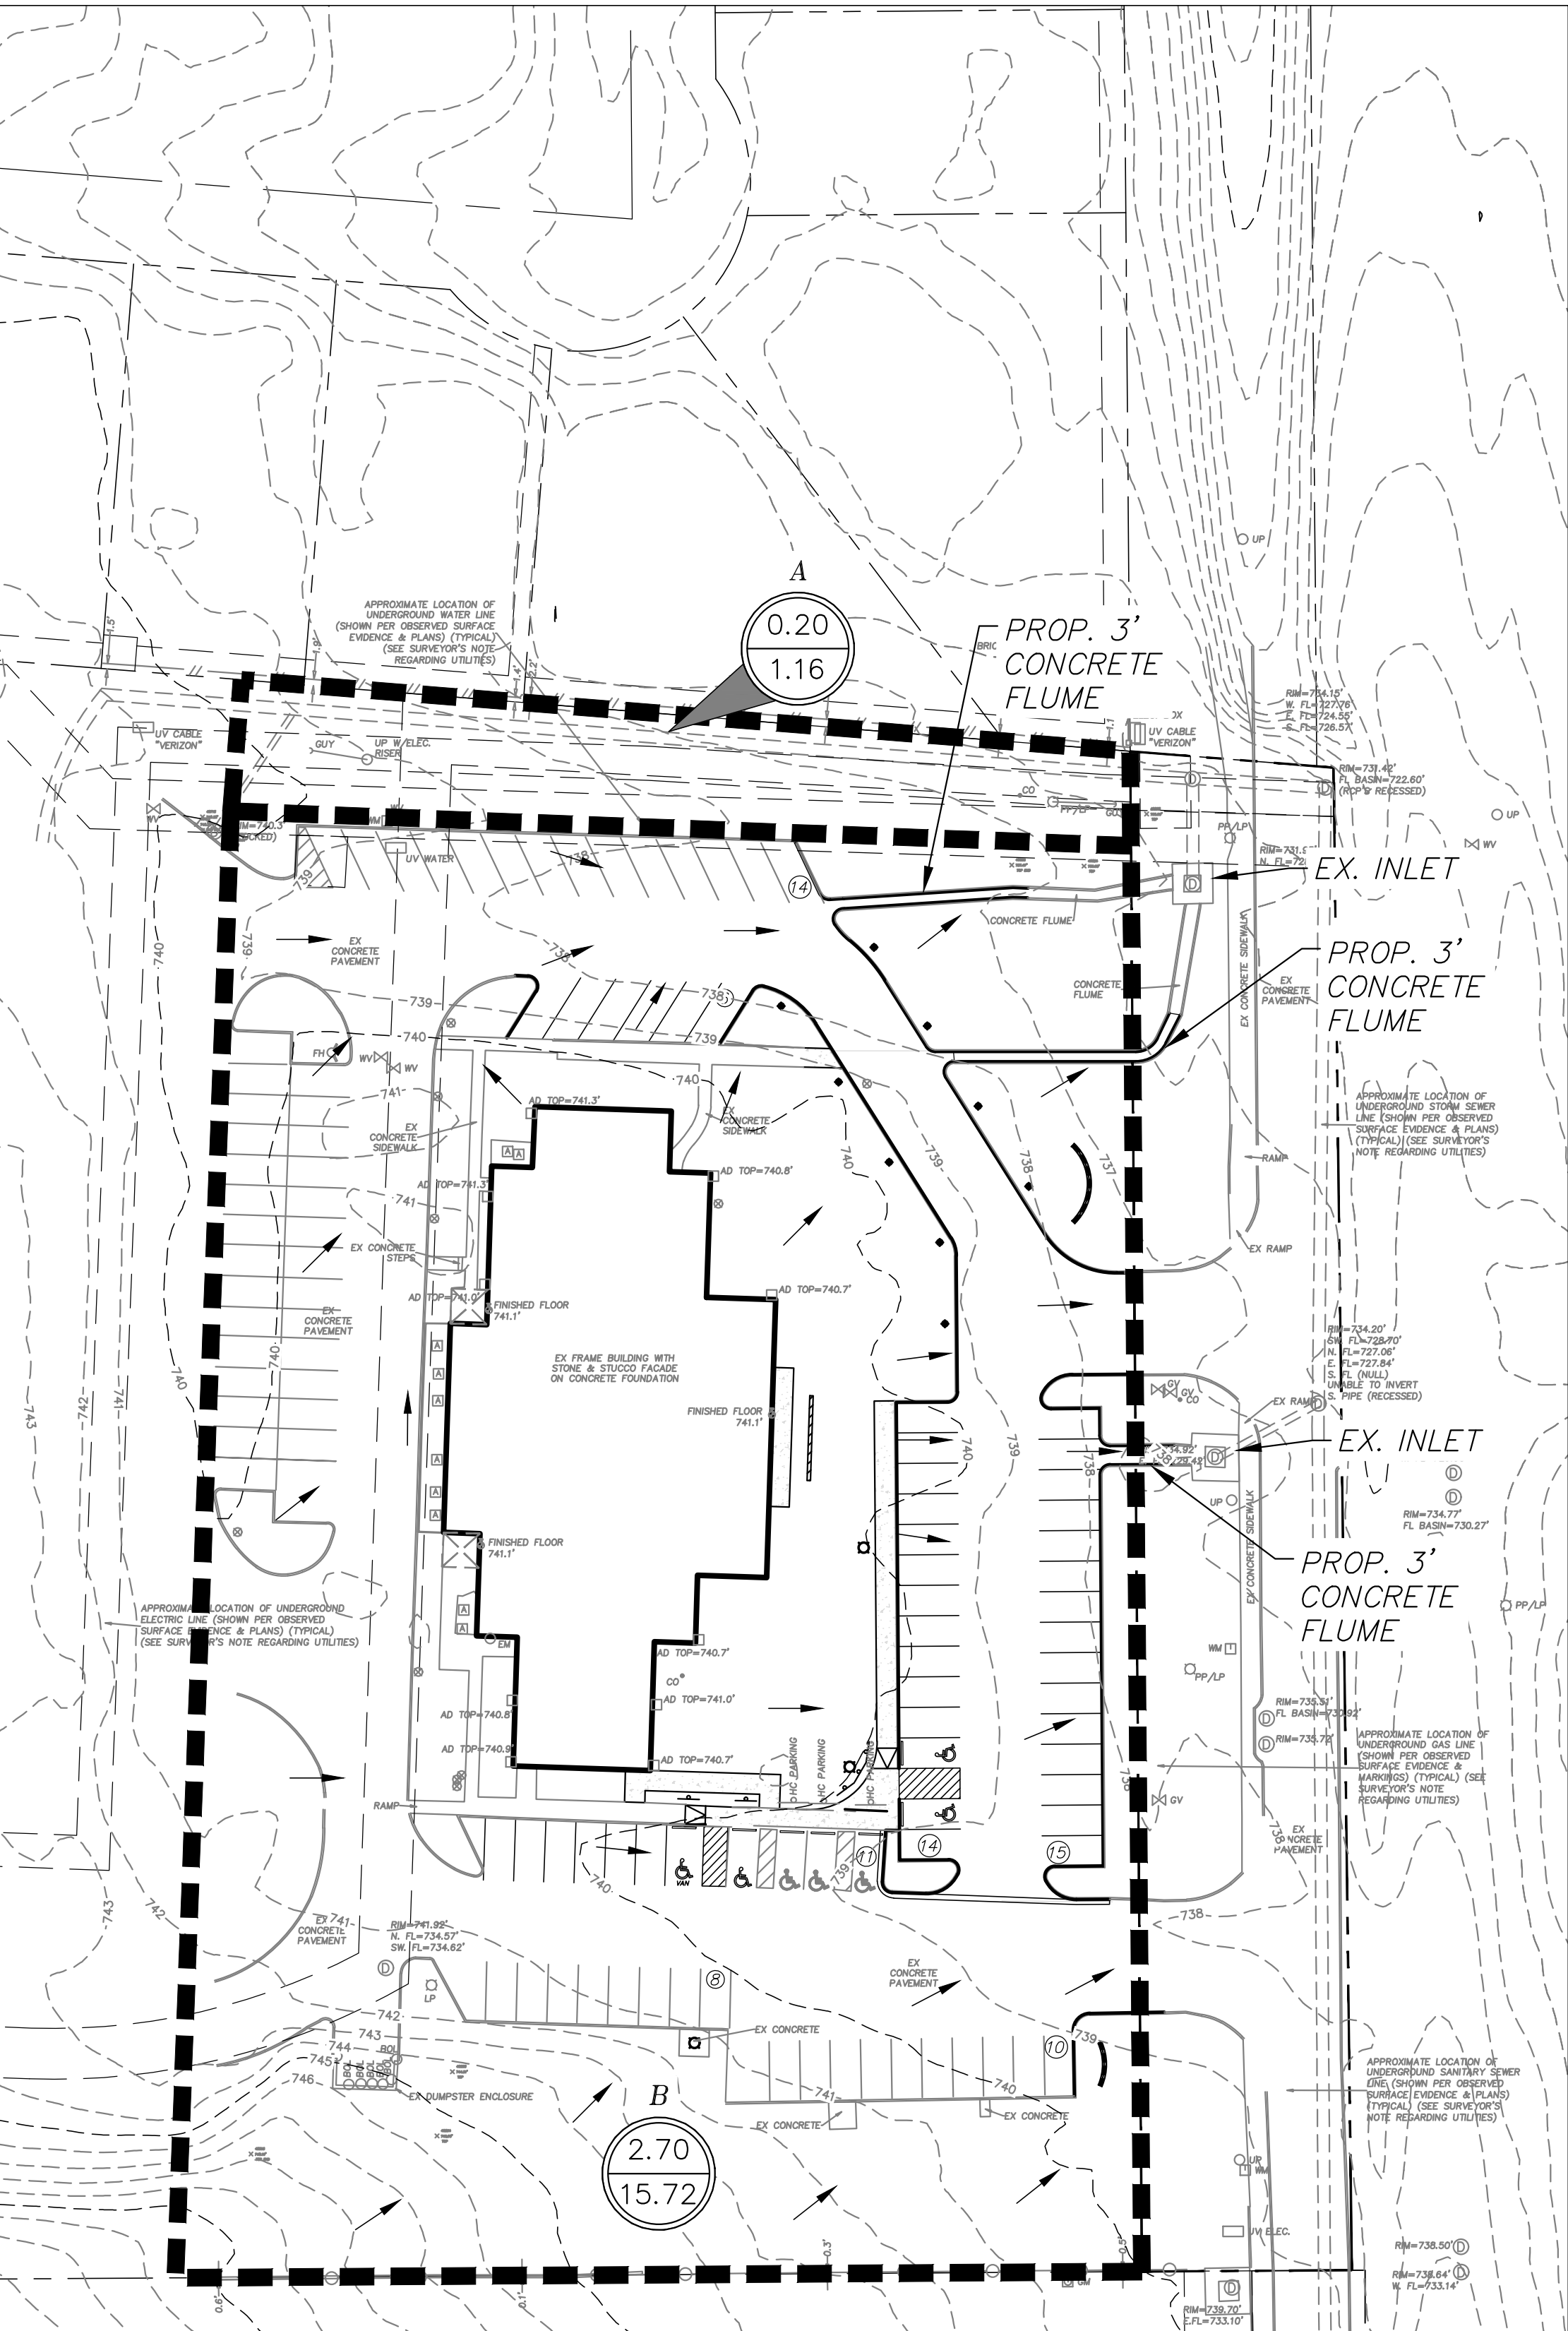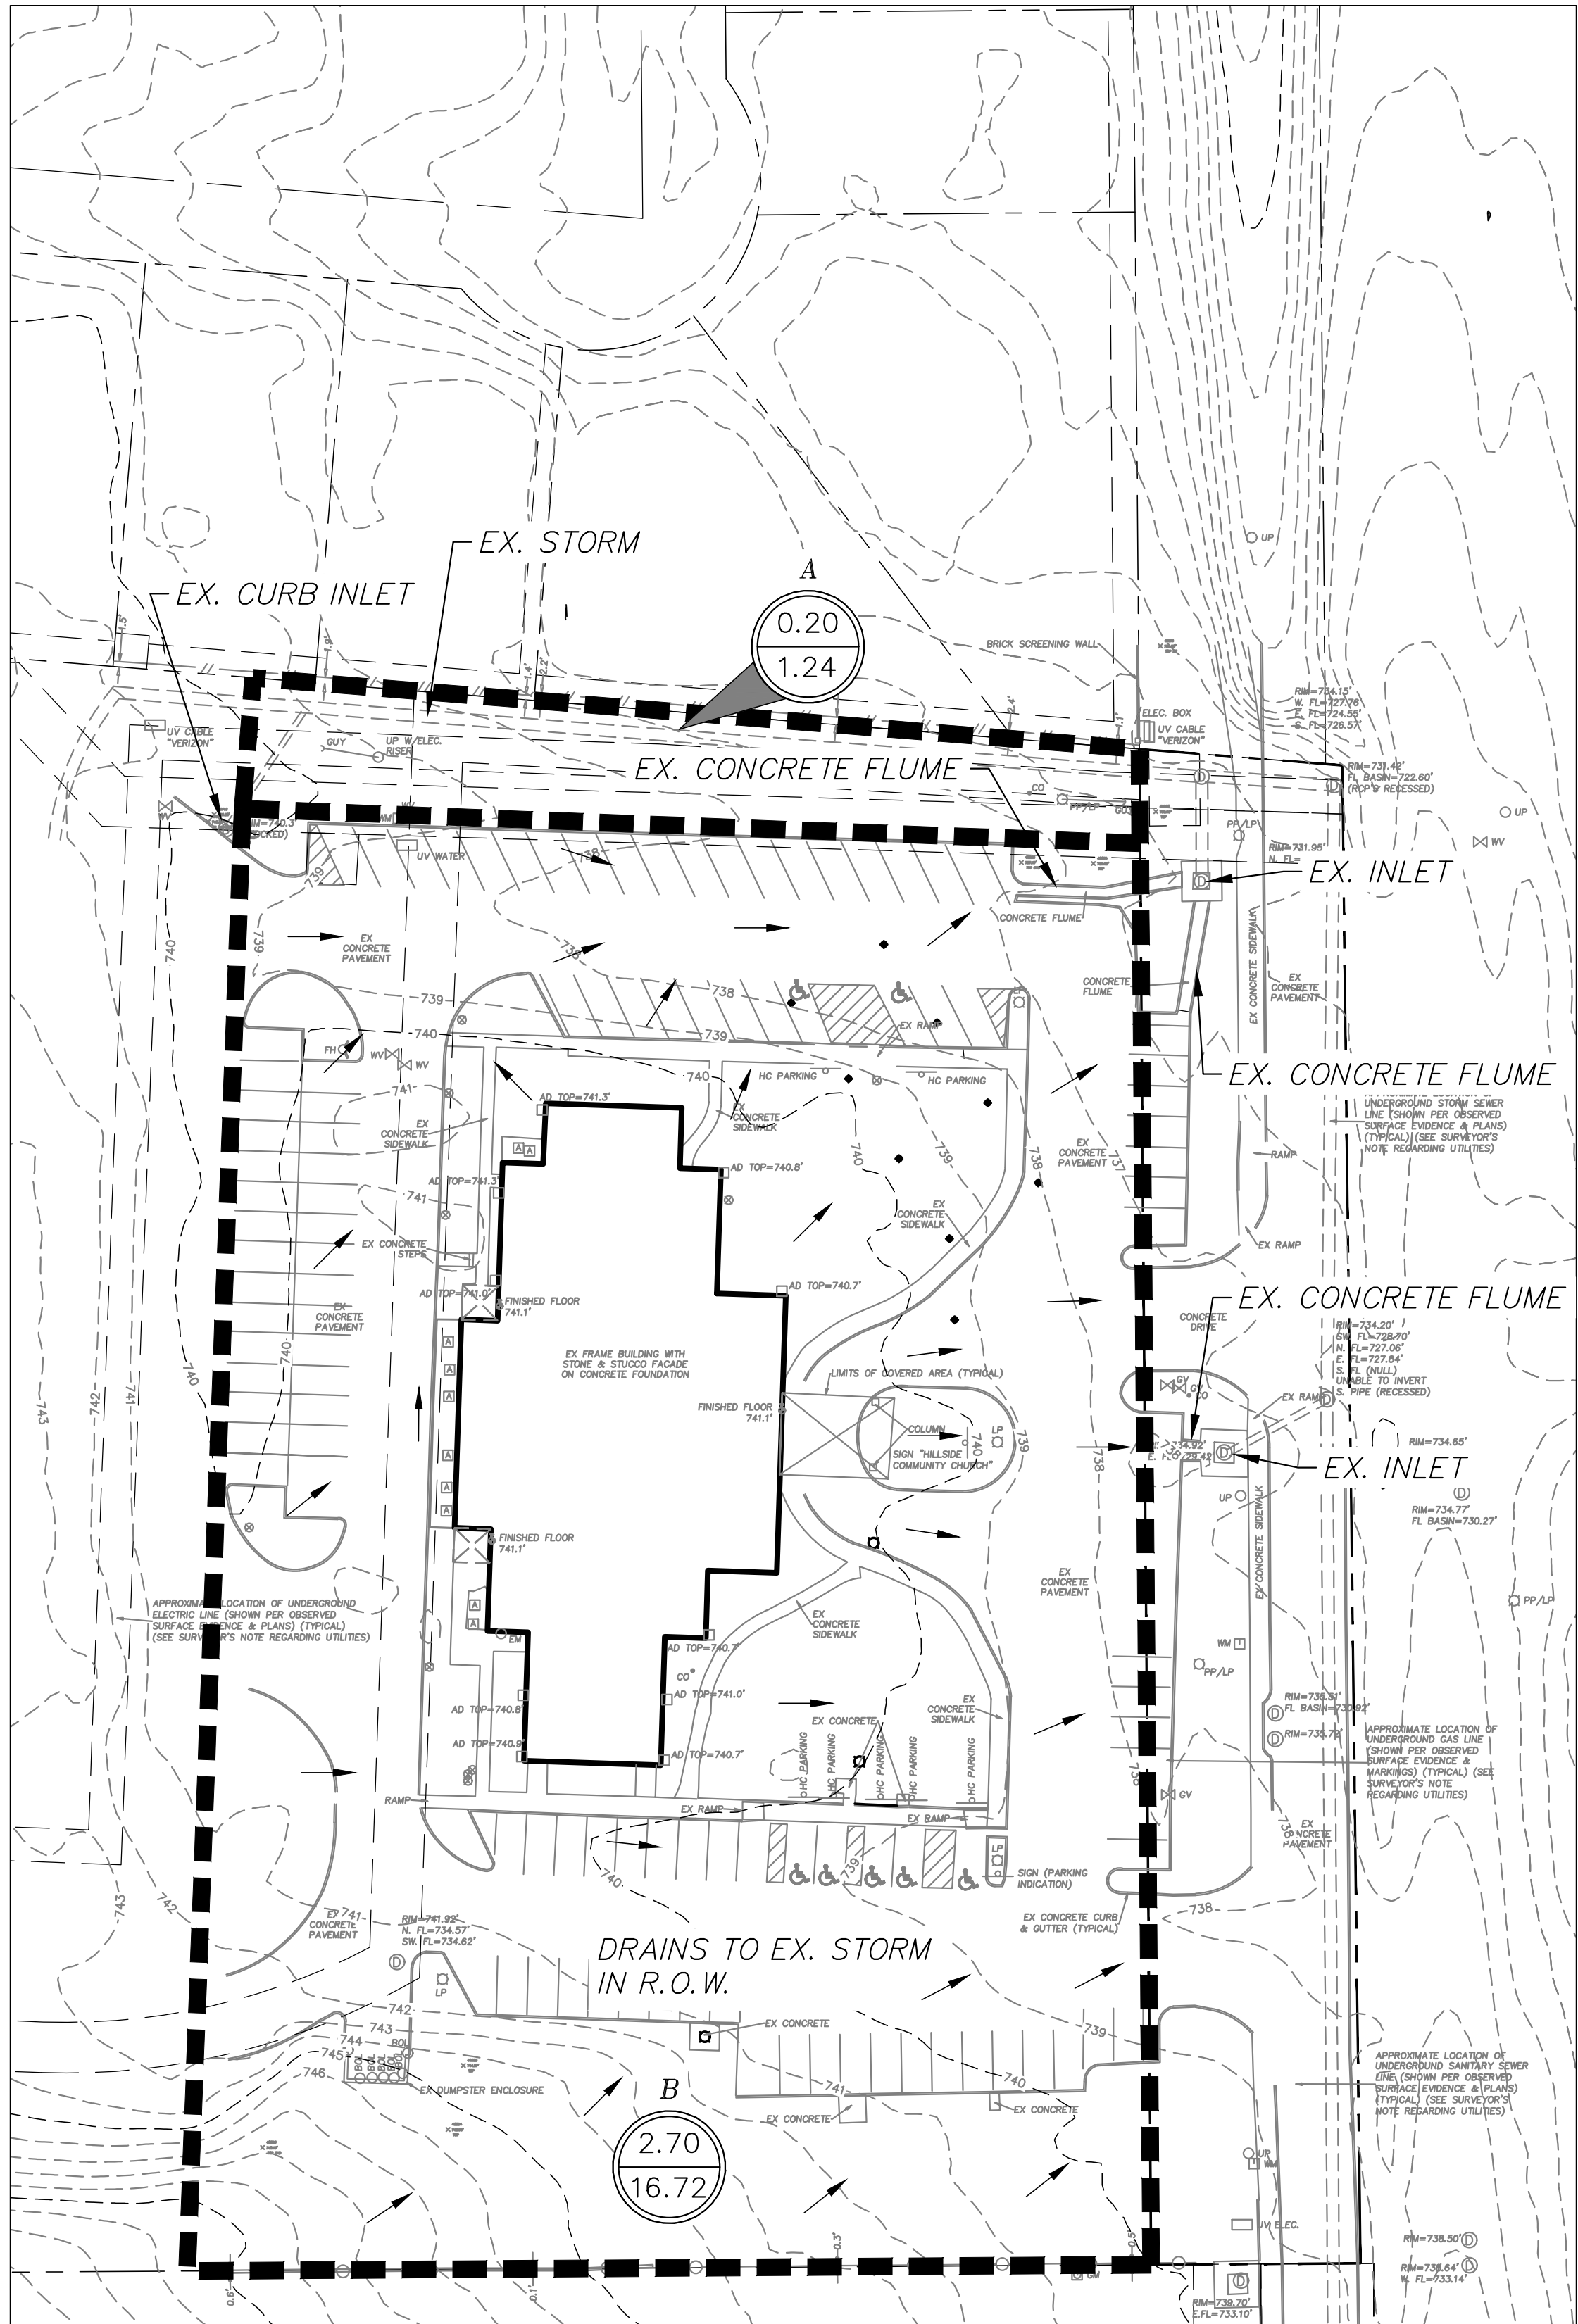

GENERAL/DRAINAGE NOTES

1. All materials and construction shall be in accordance with the City Standard Specifications and Construction Standards, and Standard Specifications for Public Works Construction prepared by North Central Texas Council of Governments (Latest Revision).
2. Existing utilities are shown schematically and are for the contractors guidance only. The location and/or elevation of existing utilities as shown on these plans are based on records of the various utility companies, and, where possible, measurements taken in the field. The contractor must call the appropriate utility company at least 72 hours prior to any excavation to request exact field location of utilities.
3. The contractor shall be responsible for protecting all existing improvements in the construction of this project. The contractor is responsible for repairs of damage to any existing improvements during construction. Repairs shall be equal to or better than condition prior to construction.
4. All storm sewer pipe 18" and larger shall be Class III RCP. All storm sewer pipe 15" and smaller shall be PVC drainage pipe or approved equal.
5. Contractor shall be responsible for maintaining trench safety requirements in accordance with the latest standards of O.S.H.A. or any other agency having jurisdiction for excavation and trenching procedures. Contractor shall provide and implement a trench safety plan complying with O.S.H.A.
6. All RCP pipe joints shall have Ram-Neck joint sealer, in the absence of a City Standard for joint sealant.
7. All roof drain laterals shall be 0.50% min. slope.

DRAINAGE LEGEND

- Drainage Area Number
- X.XX Acres
X.XX Q100
- Proposed Drainage Divide Line
- Direction of Flow

DRAINAGE CRITERIA

- $Q = K C I A$
 $K = 1.00$
 $C_{PROP} = 0.63$
 $C_{EX} = 0.67$
 $t_{100} = \text{SEE TABLE}$
 $t_c = 10 \text{ min.}$



I.D. NO.	AREA (AC.)	C	Tc (MIN)	1-YEAR				5-YEAR				100-YEAR				COMMENTS
				Ca	I (IN/HR)	Q (CFS)	Ca	I (IN/HR)	Q (CFS)	Ca	I (IN/HR)	Q (CFS)	Ca	I (IN/HR)	Q (CFS)	
A	0.200	0.67	10.0	1.00	4.06	0.54	1.00	5.74	0.77	1.00	9.24	1.24				TO EX. INLET
B	2.700	0.67	10.0	1.00	4.06	7.35	1.00	5.74	10.39	1.00	9.24	16.72				TO EX. INLET

Total Area and Composite C value (Existing)			
Area #	Area (ac)	C Value	C'A
Impervious	1.78	0.9	1.602
Pervious	1.12	0.3	0.336
Total Area	2.9		1.938
COMPOSITE C VALUE (total area/sum of C'A)		0.668276	

I.D. NO.	AREA (AC.)	C	Tc (MIN)	5-YEAR				25-YEAR				100-YEAR				COMMENTS
				Cf	I (IN/HR)	Q (CFS)	Cf	I (IN/HR)	Q (CFS)	Cf	I (IN/HR)	Q (CFS)	Cf	I (IN/HR)	Q (CFS)	
A	0.200	0.63	10.0	1.00	5.74	0.72	1.00	7.55	0.95	1.00	9.24	1.16				TO EX. INLET
B	2.700	0.63	10.0	1.00	5.74	9.77	1.00	7.55	12.84	1.00	9.24	15.72				TO PROP. 3' CONCRETE INLET

Total Area and Composite C value (Proposed)			
Area #	Area (ac)	C Value	C'A
Impervious	1.6	0.9	1.44
Pervious	1.3	0.3	0.39
Total Area	2.9		1.83
COMPOSITE C VALUE (total area/sum of C'A)		0.631034	

Issue Date	Description
1 08/20/2026	
2	
3	
4	
5	
6	

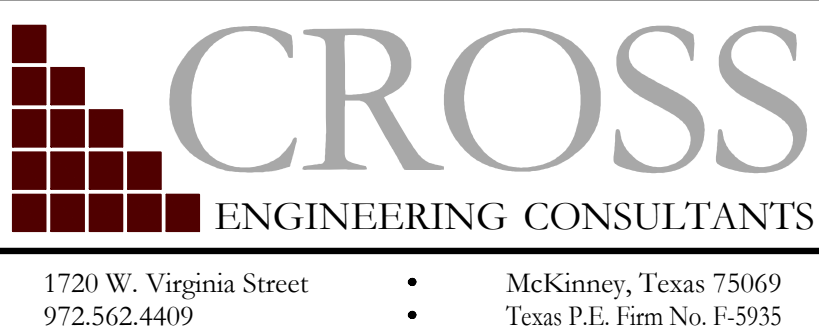


DRAINAGE AREA MAP	
HILLSIDE CHURCH SITE RENOVATIONS	
HILLSIDE COMMUNITY CHURCH	
CITY OF FORT WORTH, TEXAS	

Sheet No.
C4-1
Project No.
26073



STOP!
CALL BEFORE YOU DIG




(@ least 72 hours prior to digging)

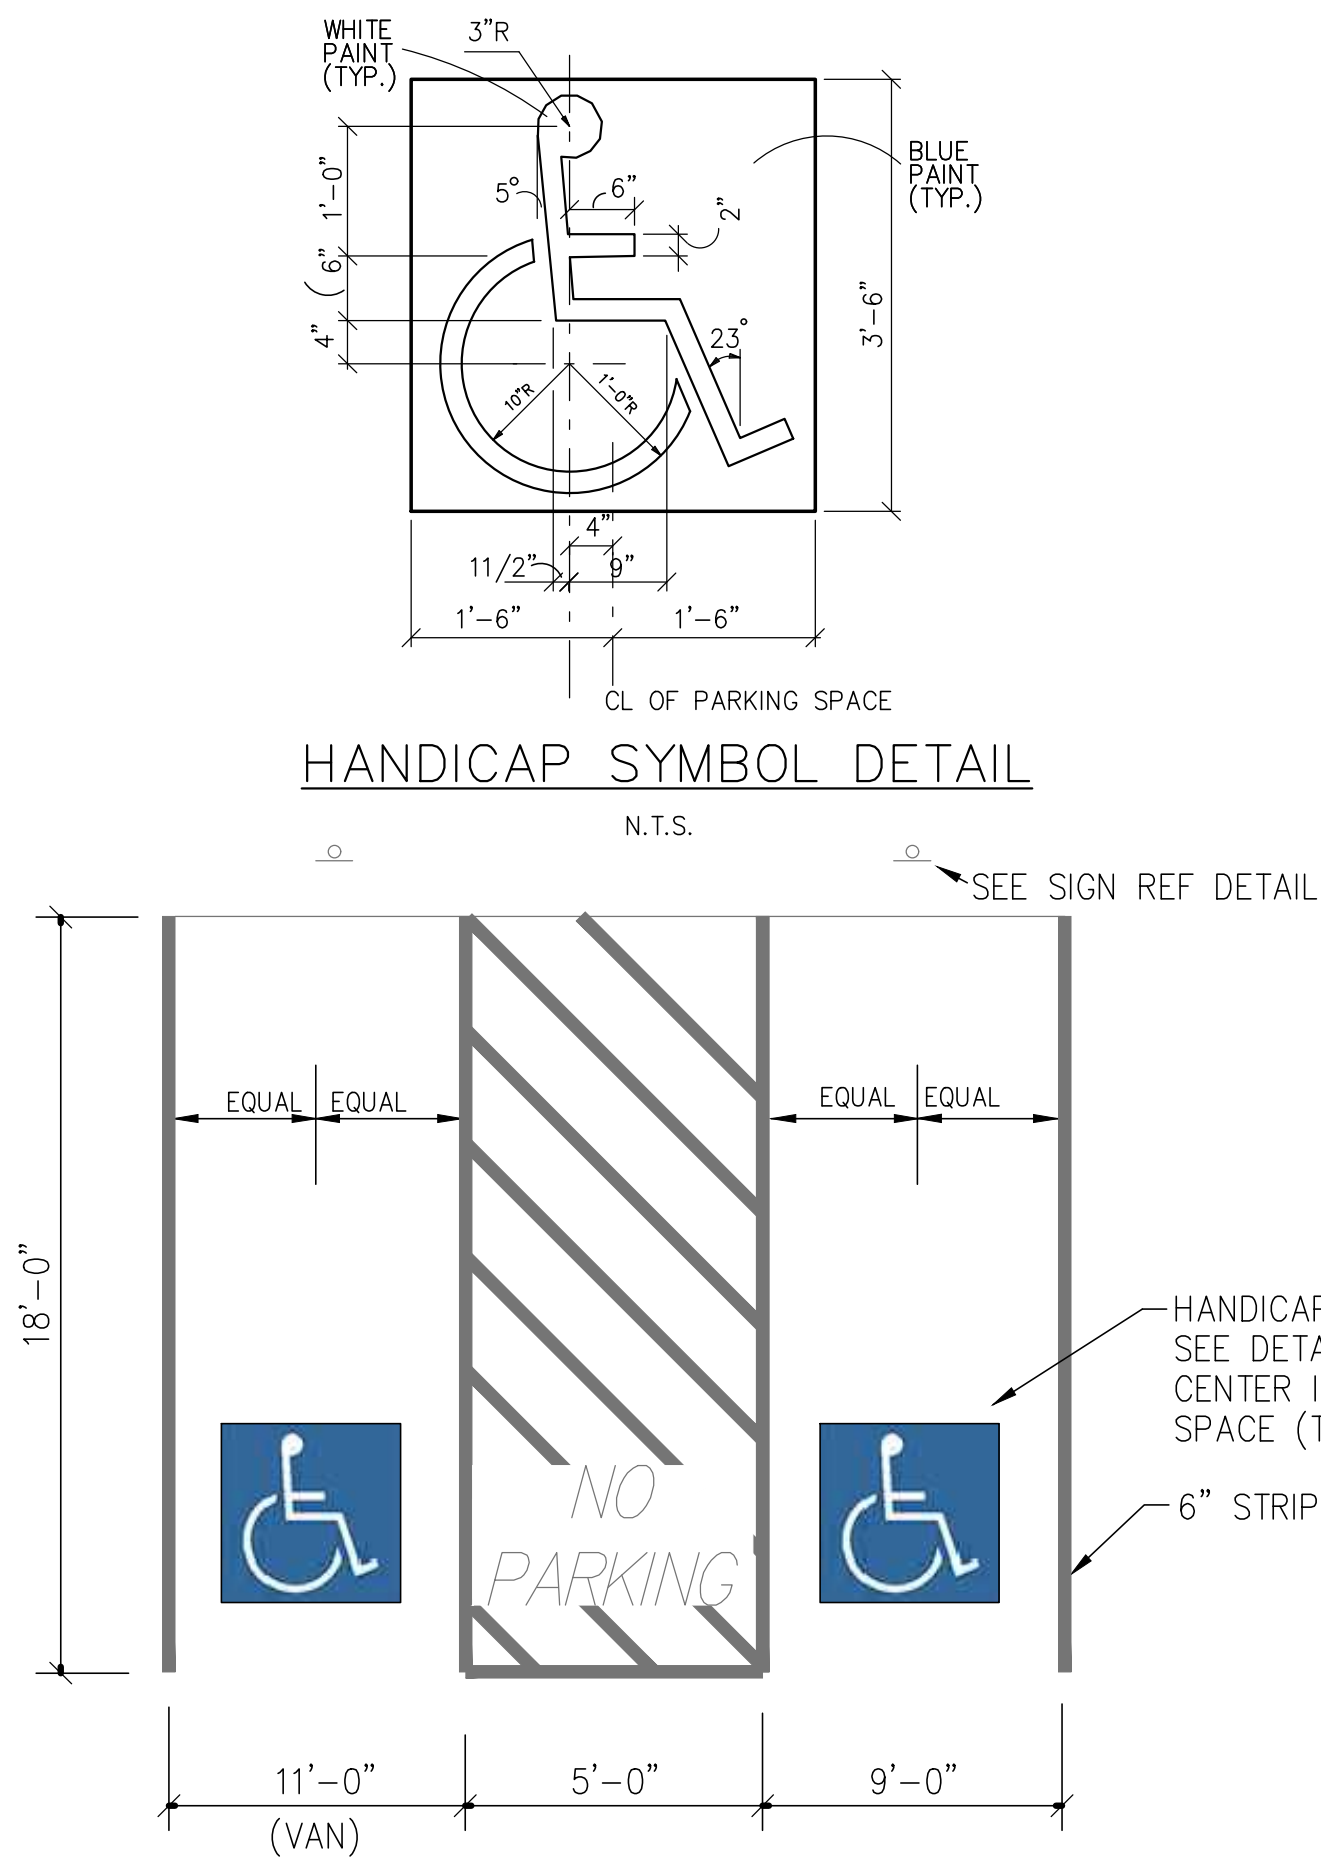


HANDICAP STRIPING DETAIL
N.T.S.

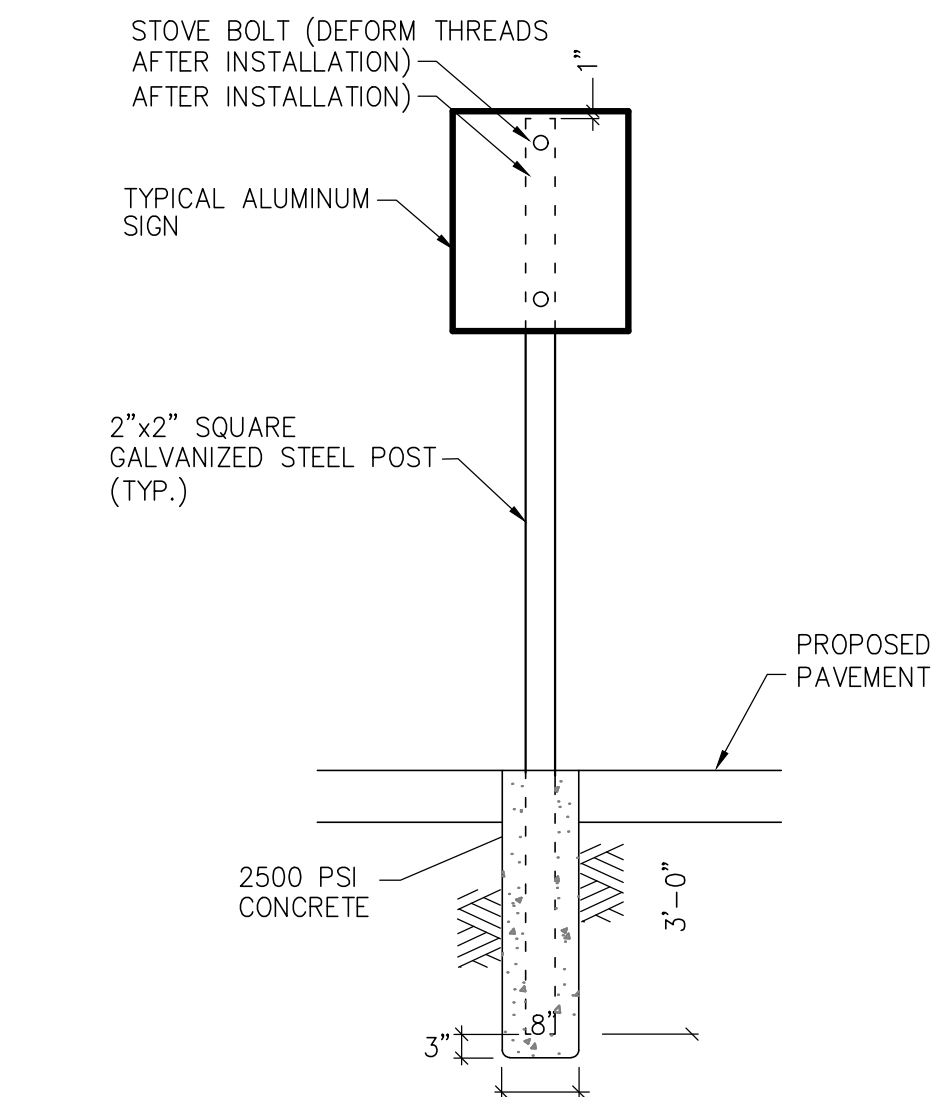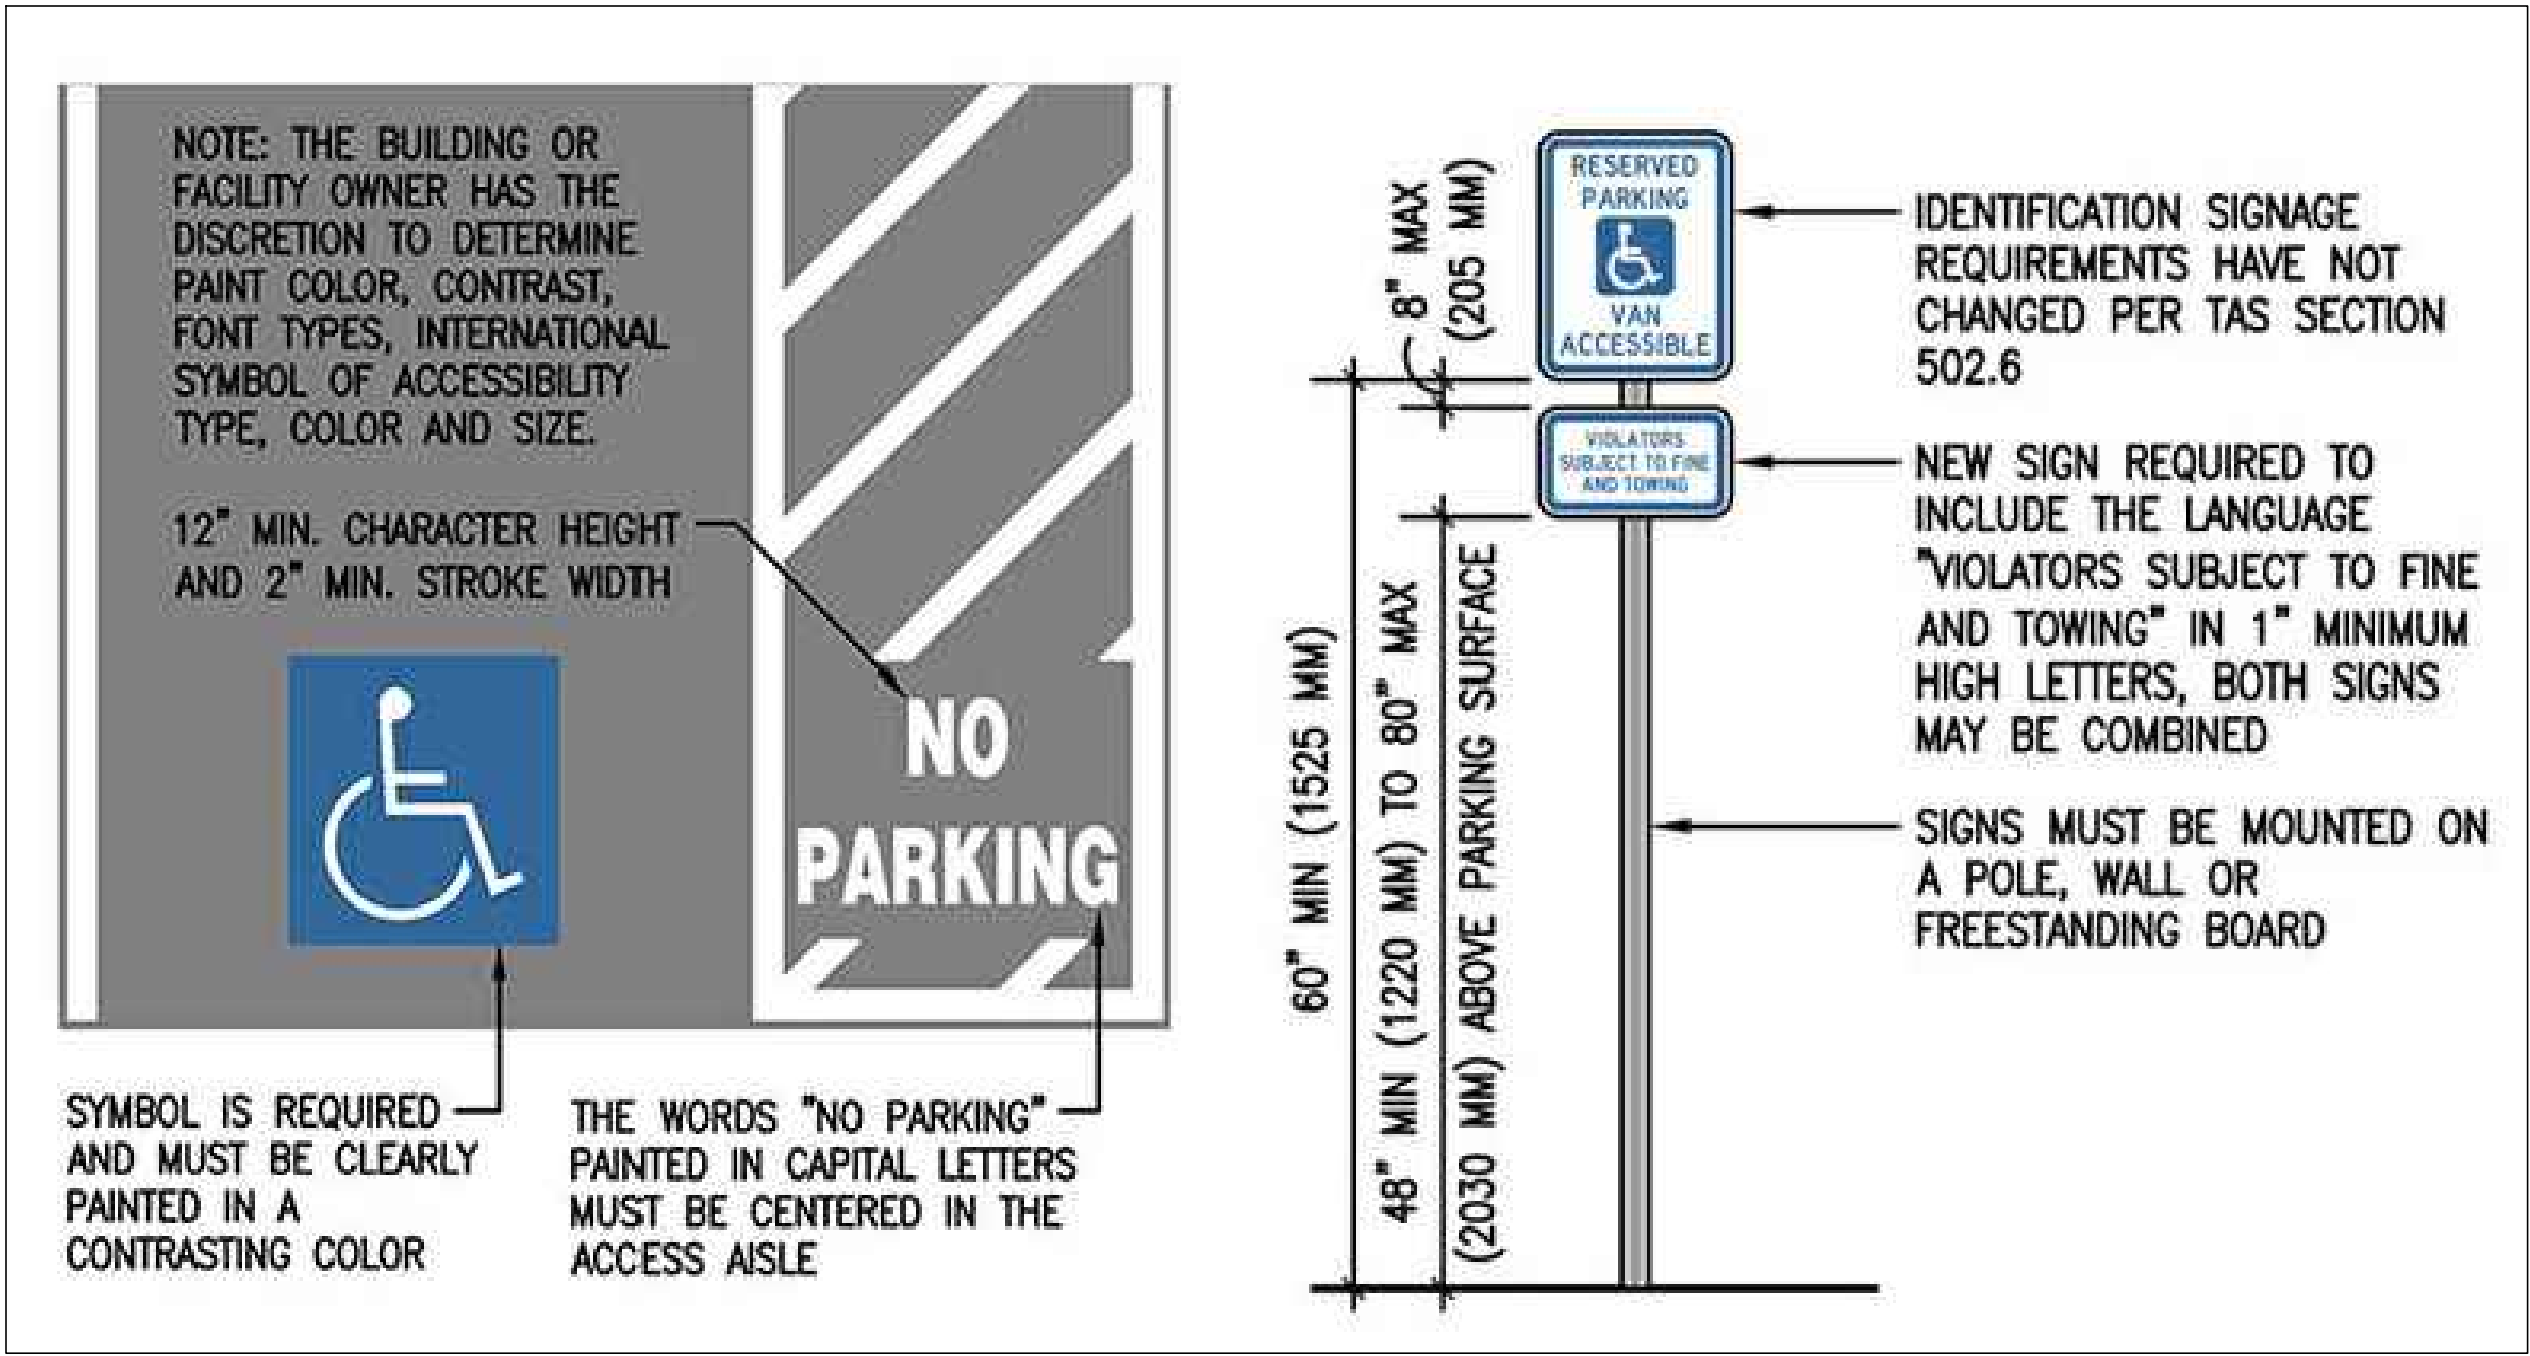


TYPICAL SIGNAGE MOUNTING DETAIL
N.T.S.

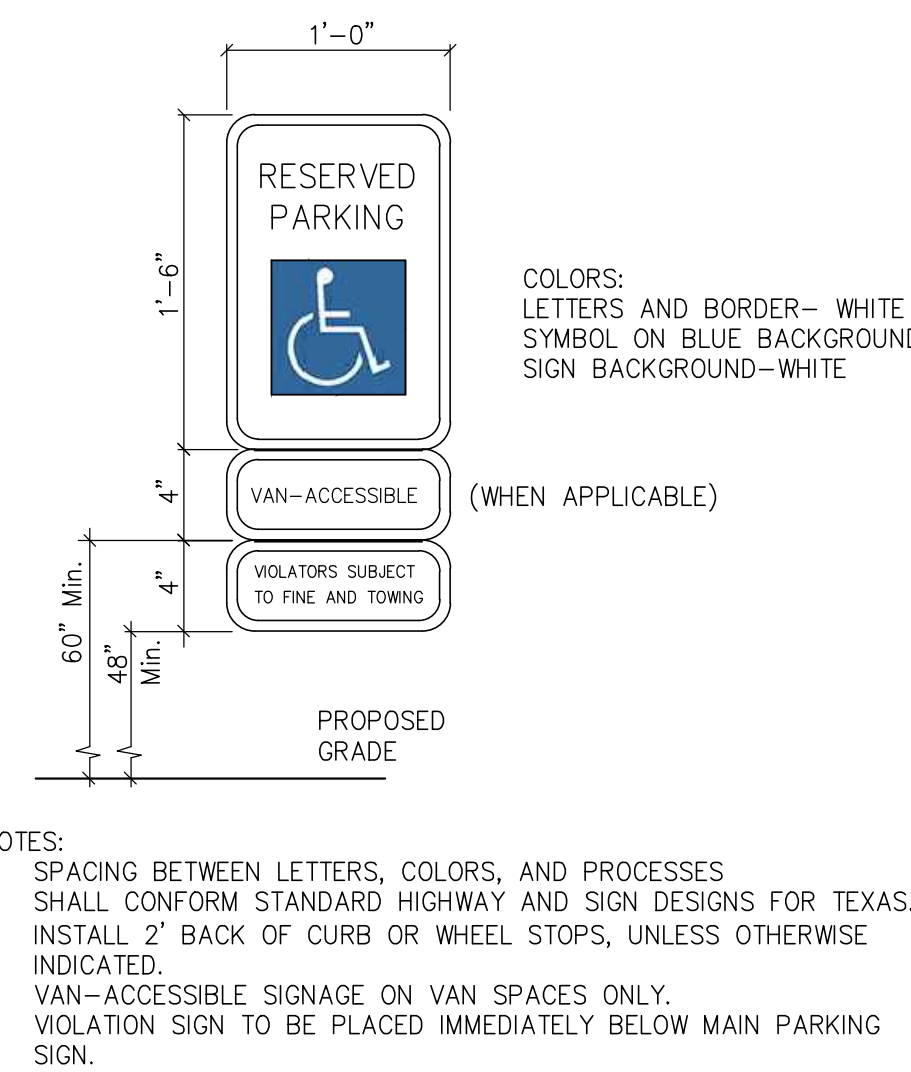


TYPICAL SIGNAGE DETAIL
N.T.S.

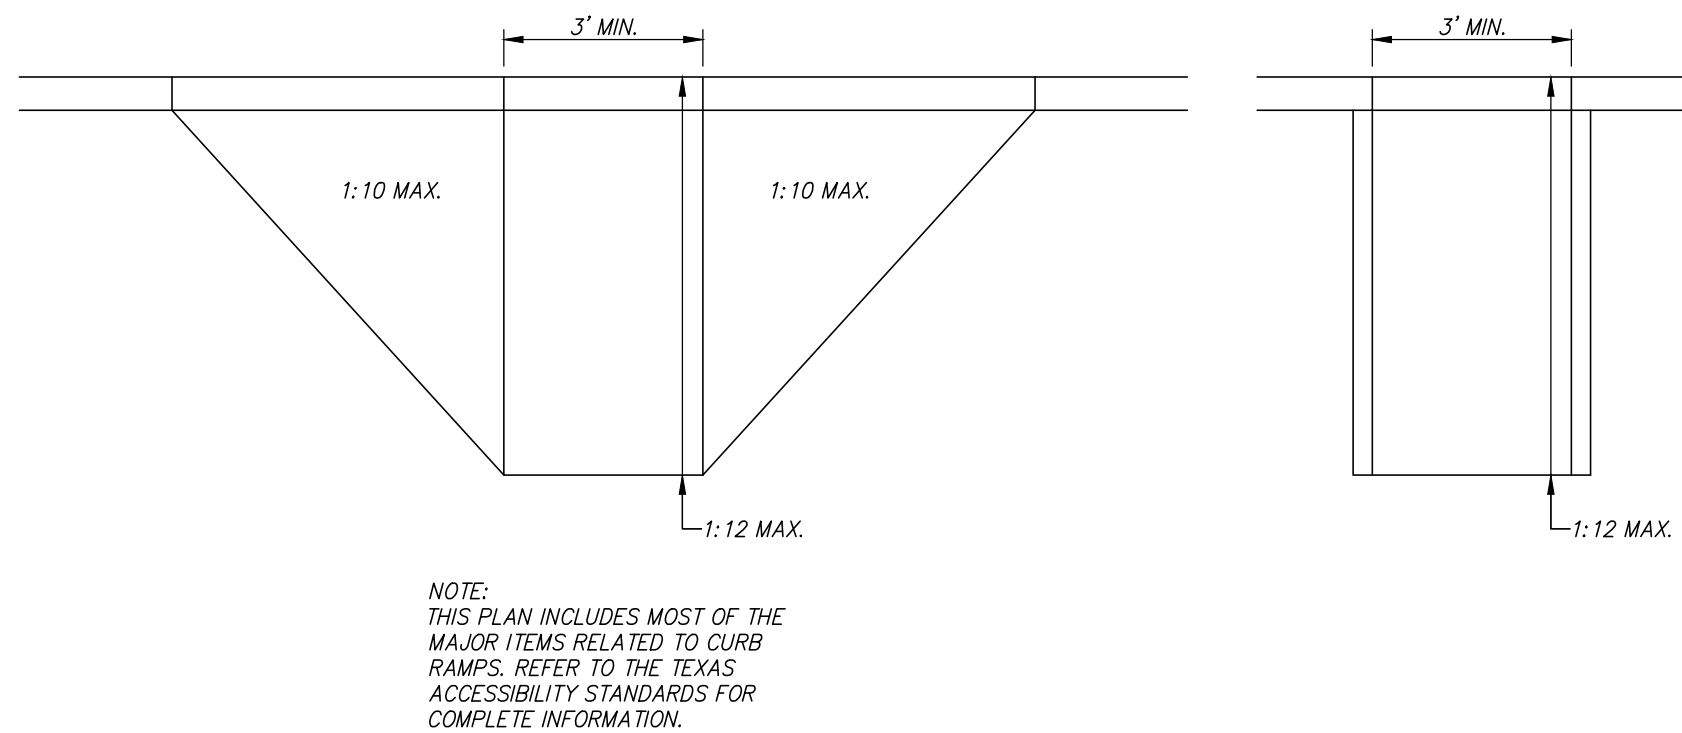


HANDICAP RAMP DETAIL (PRIVATE USE ONLY)
N.T.S.

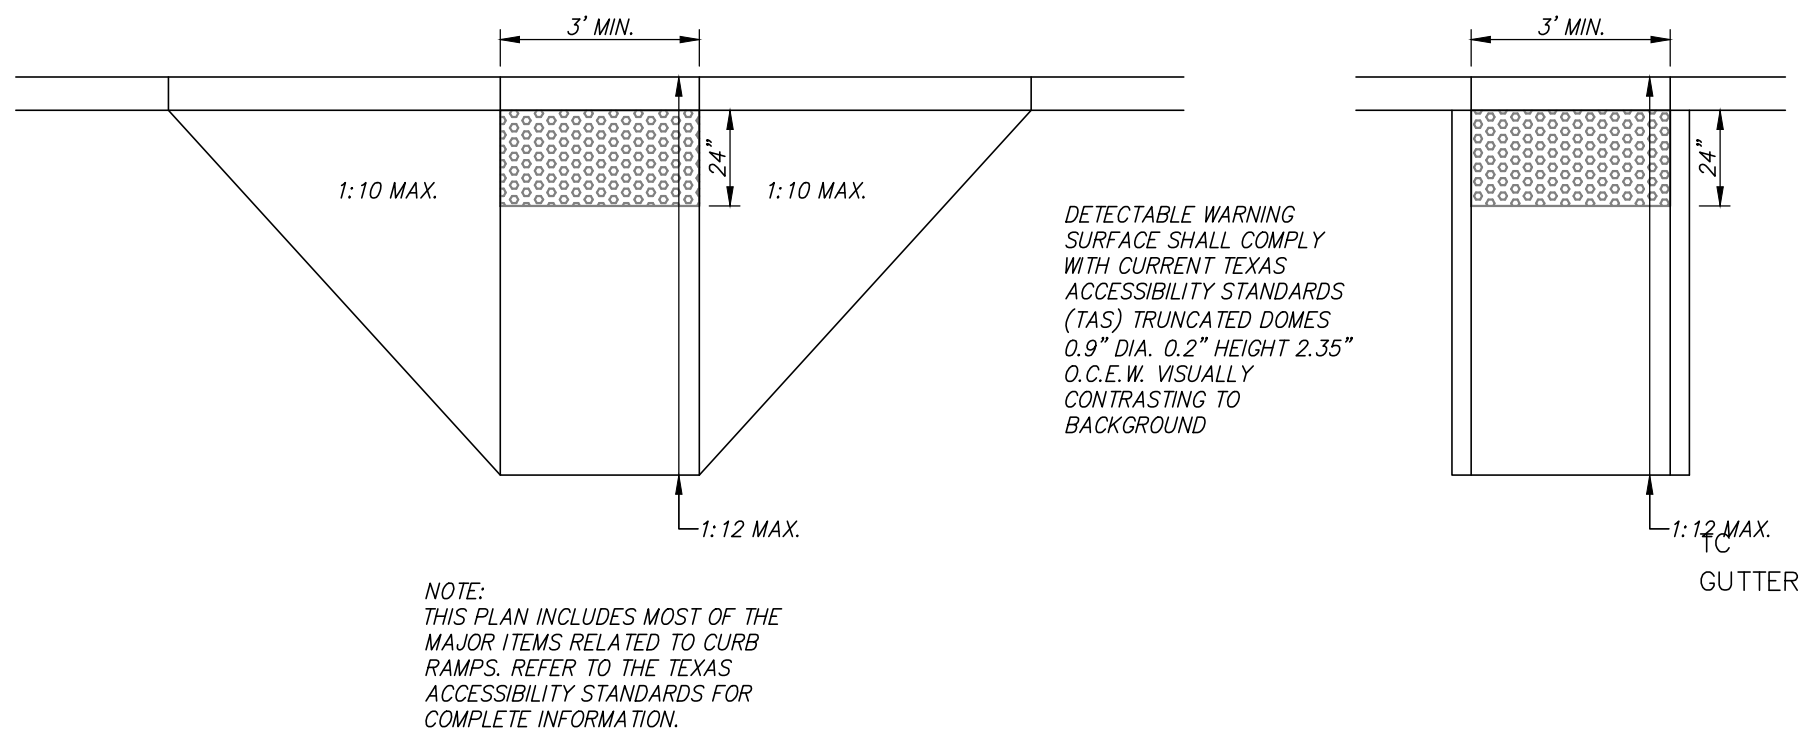


HANDICAP RAMP DETAIL (R.O.W. USE ONLY)
N.T.S.

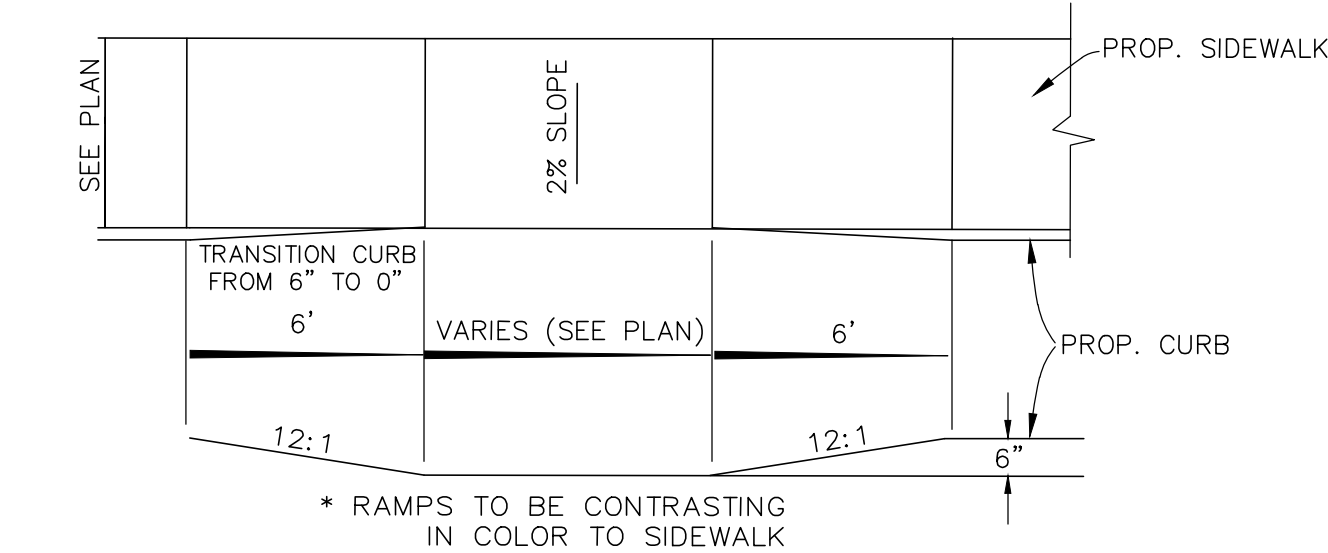


HANDICAP RAMP DETAIL (PRIVATE USE ONLY)
N.T.S.

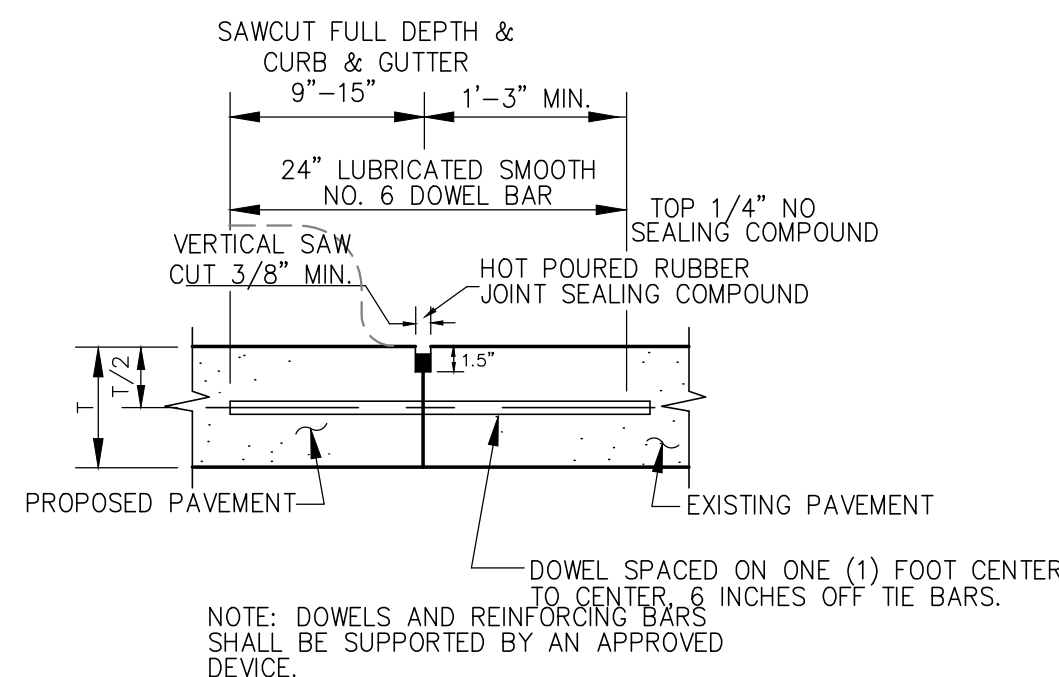


LONGITUDINAL BUTT JOINT
N.T.S.

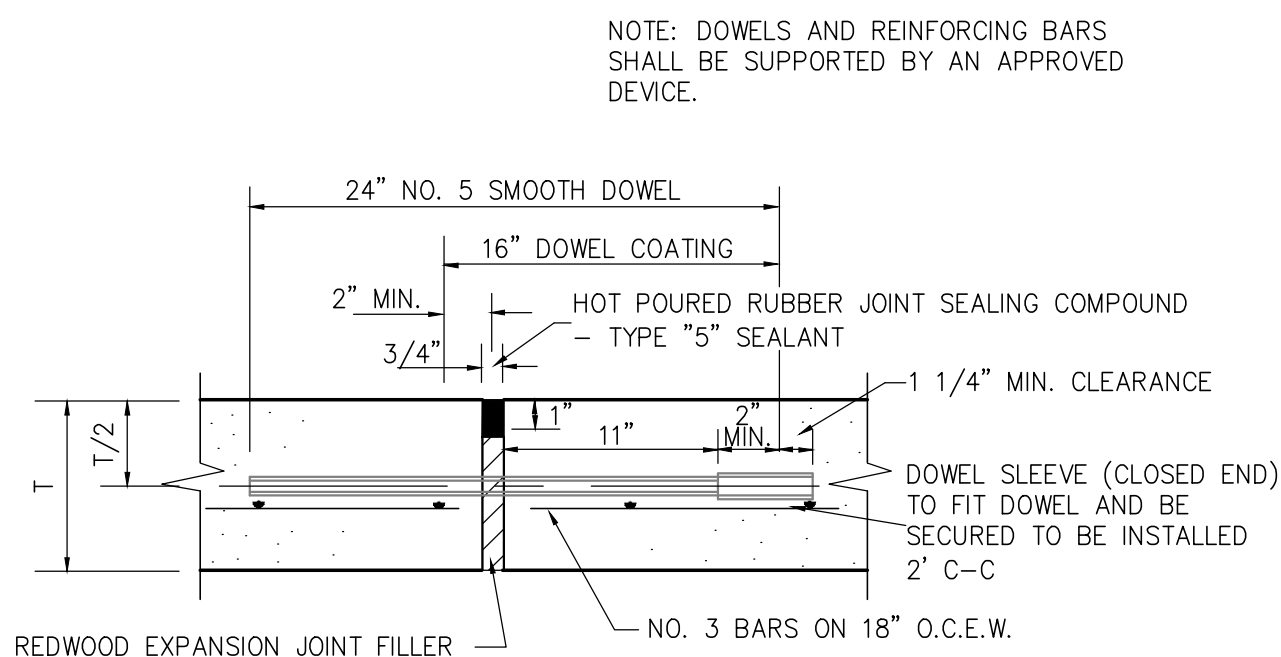


EXPANSION JOINT

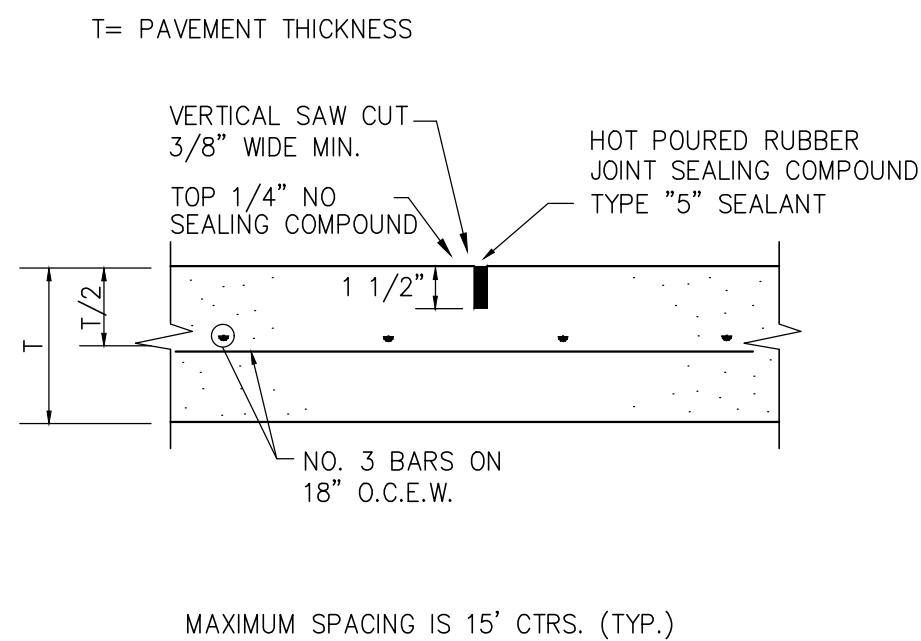


SAWED DUMMY (CONTROL) JOINT

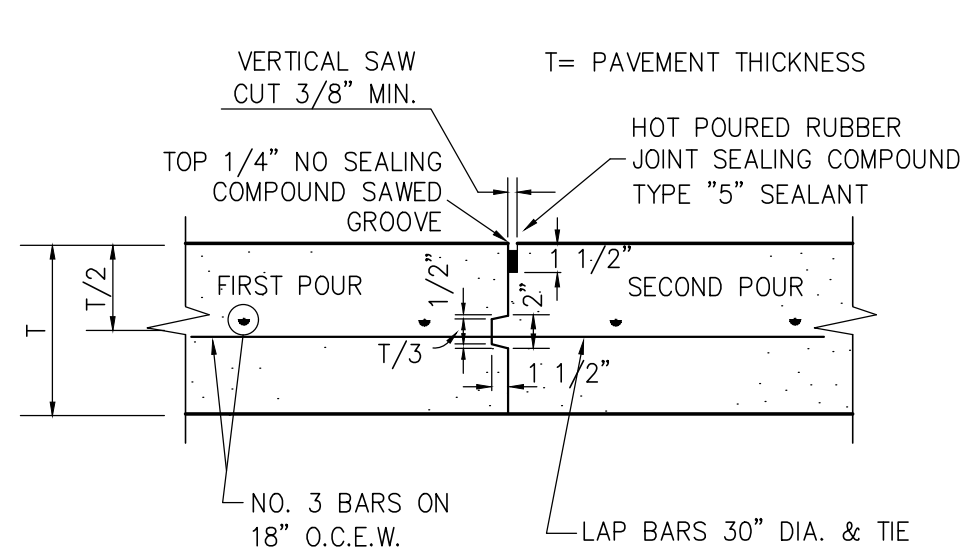


CONSTRUCTION JOINT

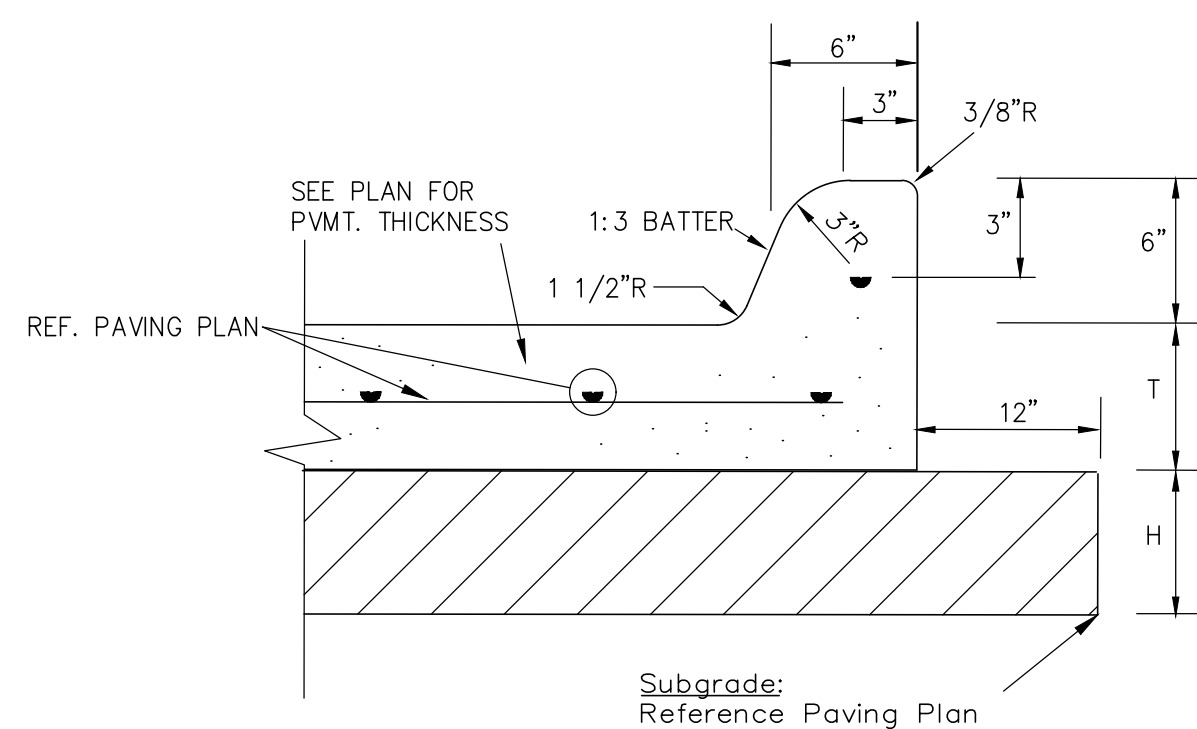

PAVEMENT SECTION WITH CURB

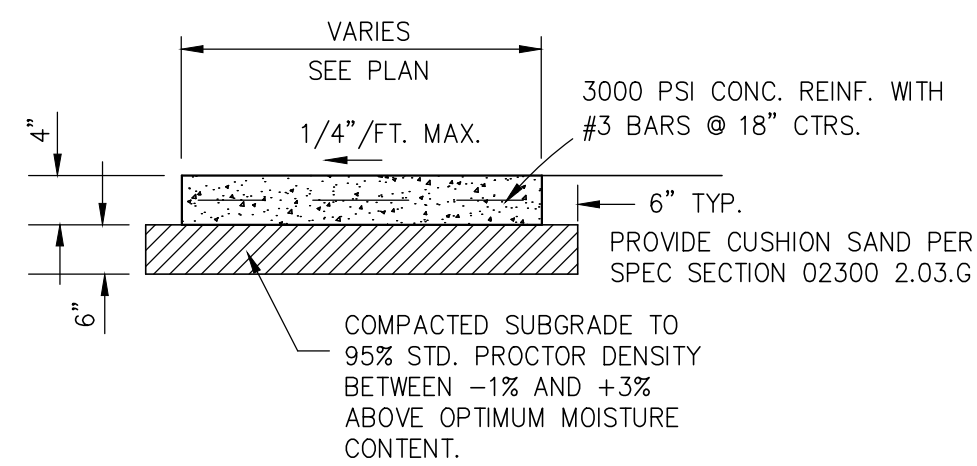

SIDEWALK DETAIL
N.T.S.

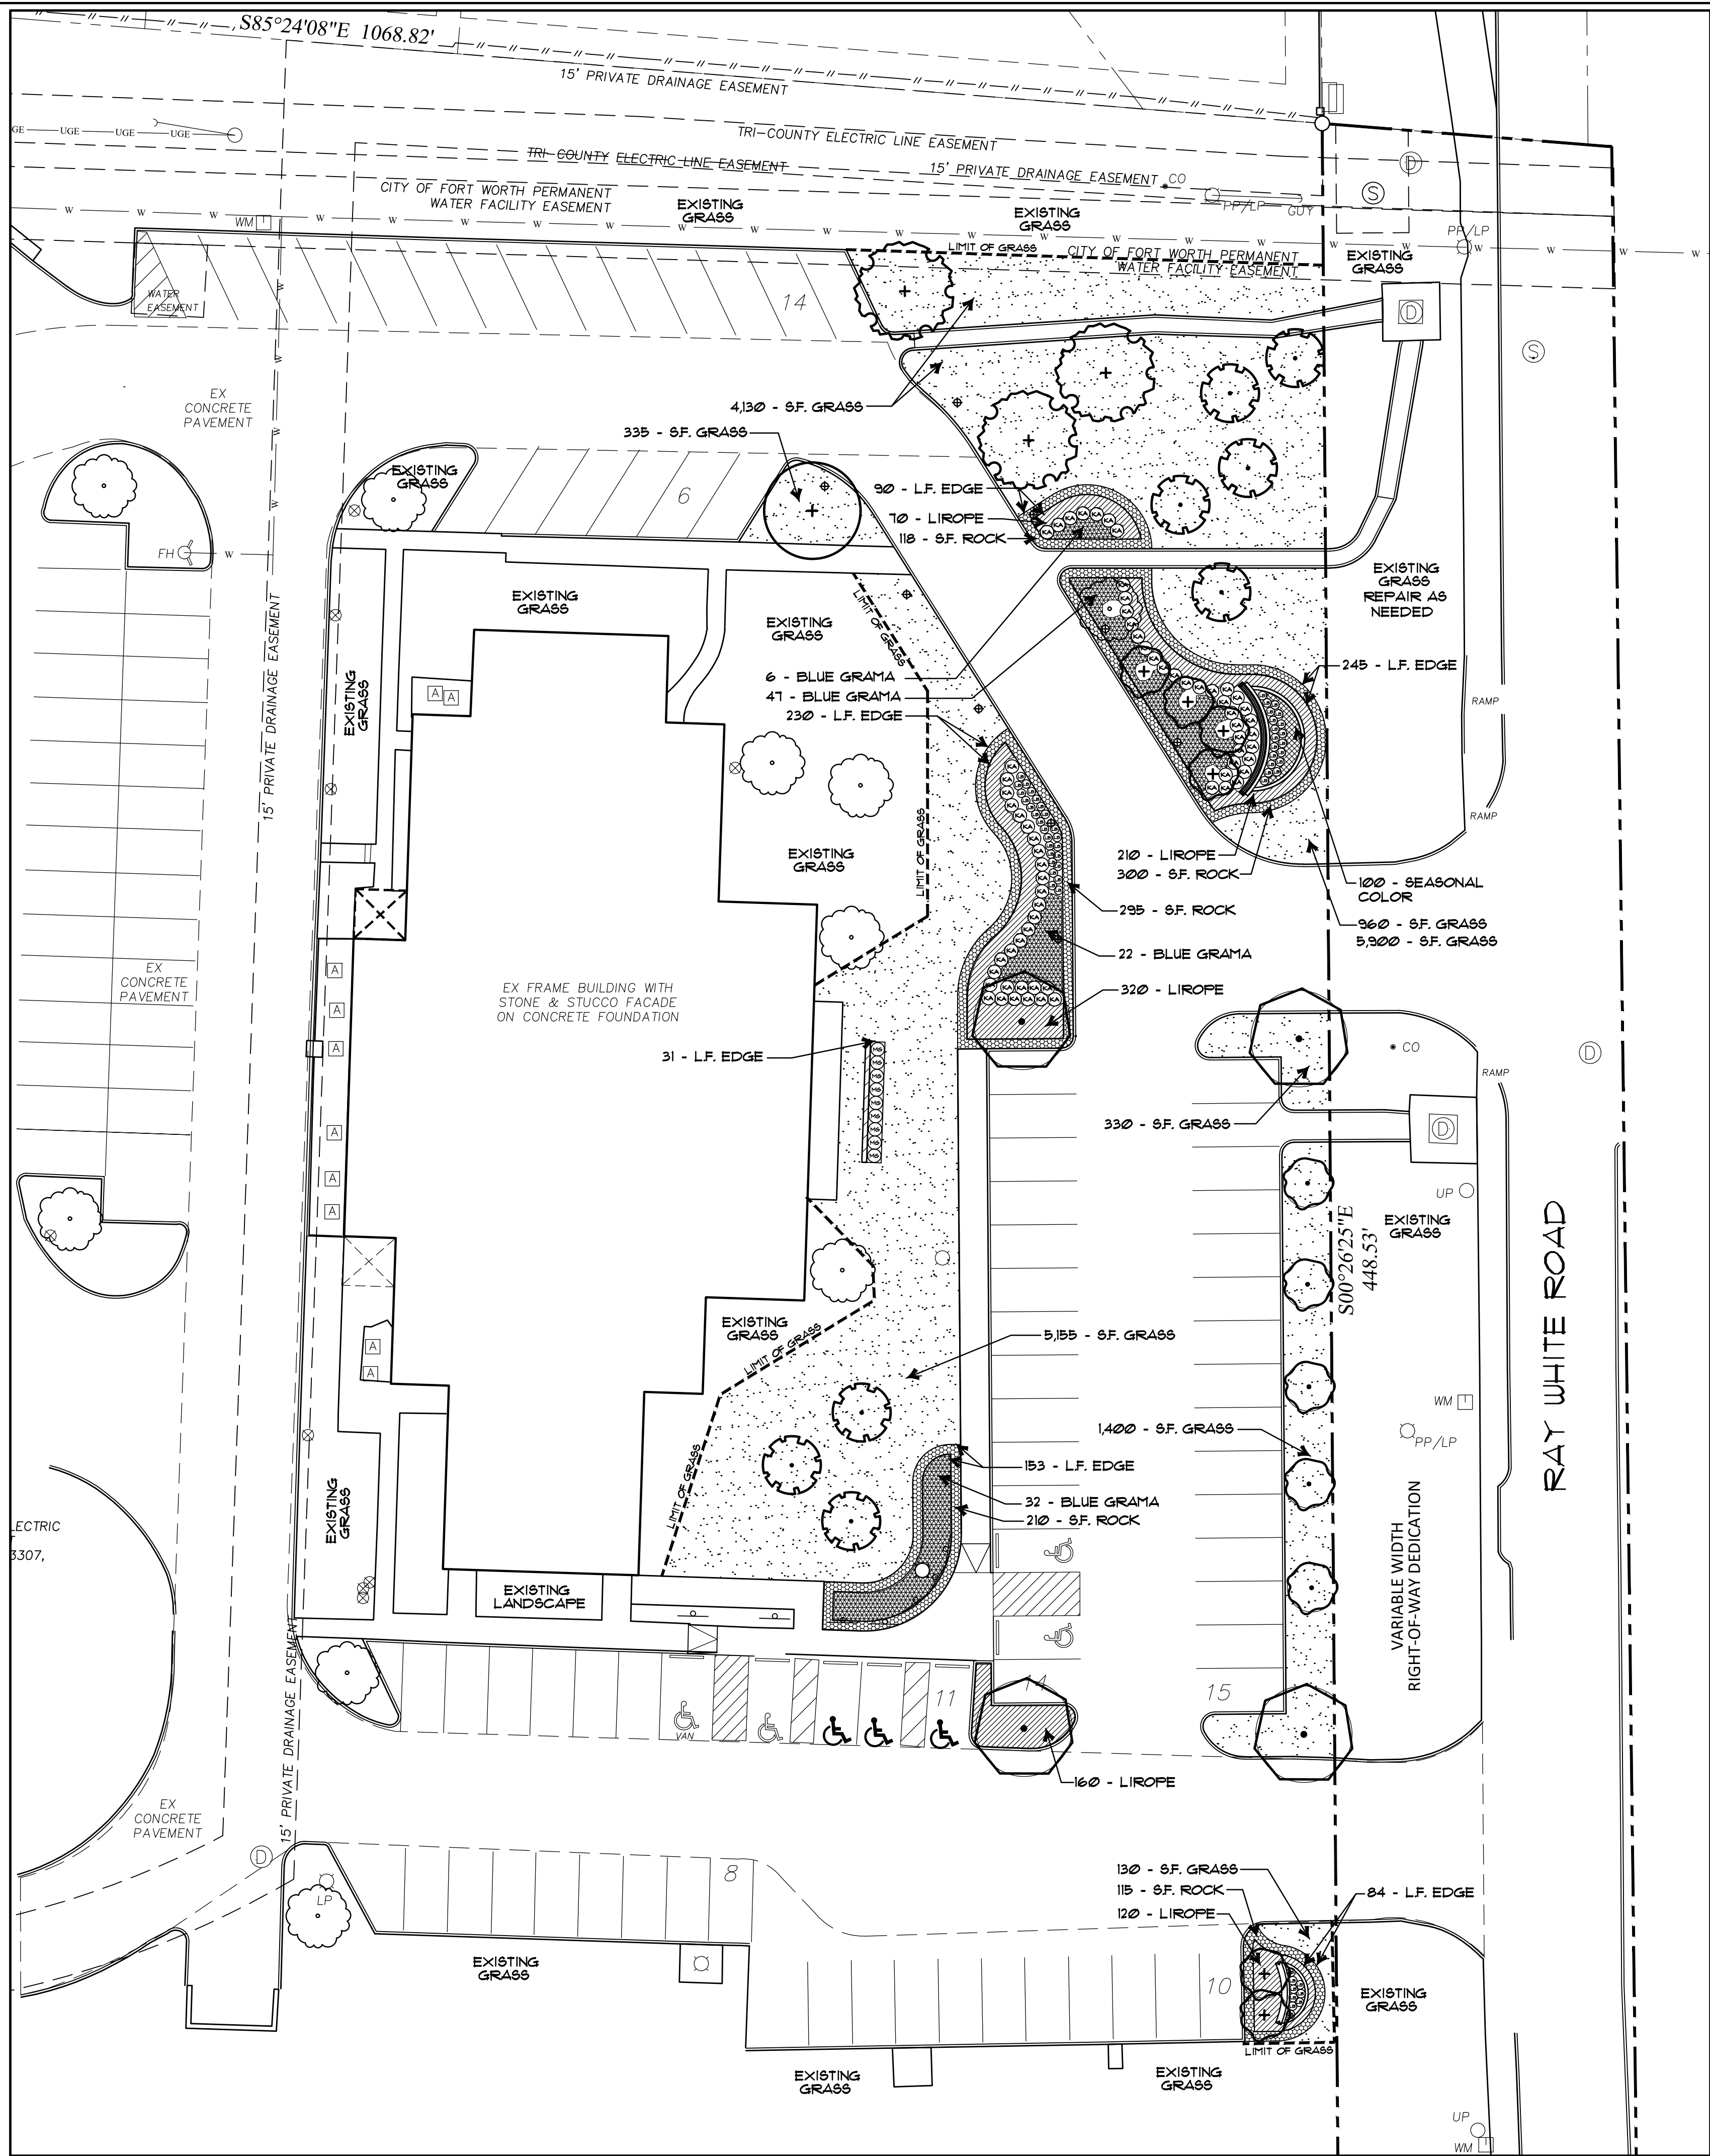

LARGE TREES				
QUANTITY	SYMBOL	COMMON NAME	SCIENTIFIC NAME	SIZE & CONDITION
4		CEDAR ELM	Ulmus crassifolia	3" caliper 10' Ht. / 4'-5' spread, B&B or container, straight trunk.
3		TEXAS RED OAK	Quercus buckleyi	3" caliper 10' Ht. / 4'-5' spread, B&B or container, straight trunk.
1		LIVE OAK	Quercus virginiana	3" caliper 10' Ht. / 4'-5' spread, B&B or container, straight trunk.

ORNAMENTAL TREES				
QUANTITY	SYMBOL	COMMON NAME	SCIENTIFIC NAME	SIZE AND CONDITION
4		NATCHEZ GRAPE MYRTLE	Lagerstroemia indica 'Natchez'	BELIEVED TO BE SPECIES TO MATCH EXISTING TREES WITHIN BED STANDARD SINGLE TRUNK TO MATCH
5		TUSCARORA GRAPE MYRTLE	Lagerstroemia indica 'Tuscarora'	8' Ht./3' spread min. Standard 20 gallon, Single 2" Trunk Min. full, bushy tree formed, specimen.
8		SHOAL CREEK VITEX	Vitex agnus-castus 'Shoal Creek'	6' Ht./3' spread min. 20 gallon, 3 Trunk Min. full, bushy tree formed, specimen.

SHRUBS				
QUANTITY	SYMBOL	COMMON NAME	SCIENTIFIC NAME	SIZE AND CONDITION
66		KALEIDOSCOPE ABELIA	Abelia x grandiflora 'Kaleidoscope'	3 gallon, 18" Ht./20-24" spread, full, bushy, specimen
54		LITTLE BUNNY GRASS	Panicum alopecuroides 'Little Bunny'	3 gallon, 12" Ht./12-18" spread, full, bushy, specimen
107		BLONDE AMBITION BLUE GRAMA	Bouteloua gracilis 'Blonde Ambition'	3 gallon, 18" Ht./12-18" spread, full, bushy, specimen


TURF GRASS				
12,440 SF.		SF. GRASS BERMUDA GRASS	Cynodon dactylon	Solid sod

MISCELLANEOUS				
880		BIG BLUE LIROPE	Liriope muscari 'Big Blue'	1 gallon, 10"-12" Ht./10"-12" spread, bushy, full to ground
100		SEASONAL COLOR	TO BE SELECTED	4" Pots bushy, full to ground
1,038 SF. ROCK		2" TO 3 1/2" CRUSHED GRANITE	NATURAL BROWN COLOR	4" depth of Crushed Granite over filter fabric
802 LF.		RYERSON STEEL EDGE OR BENDER BOARD		

WITH 2" OF "PROFESSIONAL BEDDING SOIL" FROM LIVING EARTH TECHNOLOGY AND
TILLED TO THE DEPTH OF 4".
ALL LANDSCAPE BEDS AND TREE WELLS SHALL RECEIVE A TOP DRESSING OF 2" DEEP
"FINE SHREDDED HARDWOOD MULCH" FROM LIVING EARTH TECHNOLOGY.
ALL DIRT SPOILS FROM SHRUB AND TREE PLANTINGS SHALL BE REMOVED FROM SITE.
ALL GRASS AREAS SHALL BE RAKED SMOOTH AND ALL DEBRIS REMOVED PRIOR TO
GRASS SOD INSTALLATION.
LANDSCAPE CONTRACTOR TO VERIFY ALL QUANTITIES

IRRIGATION NOTE


ALL REQUIRED LANDSCAPE AREAS SHALL BE PROVIDED WITH
AN AUTOMATIC UNDERGROUND IRRIGATION SYSTEM WITH RAIN
AND FREEZE SENSORS, AND SAID IRRIGATION SYSTEM SHALL BE
DESIGNED BY A QUALIFIED PROFESSIONAL AND INSTALLED BY
A LICENSED IRRIGATOR.

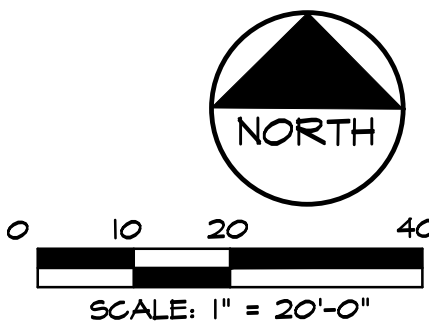

Revisions:		Date:
#		

Issued For:
PERMIT / BID
Job No.
26128
Scale
1" = 20'-0"
Drawn By:
JDG
Date
08-21-2026

Hillside Community Church
Site Renovations
Fort Worth Texas

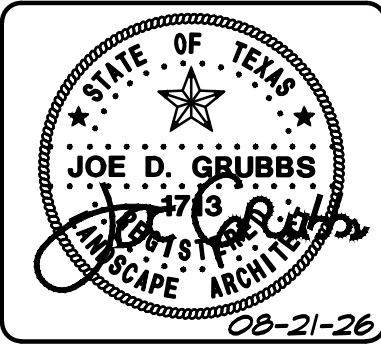

Sheet Title:
Landscape Plan
Sheet Number:
L1
of **L2** Sheets

LANDSCAPING

PART 1 - GENERAL

- 1.1 SCOPE:
- Provide all labor, materials and equipment for complete installation of landscaping, as indicated on the drawings and specified herein.
- 1.2 RELATED WORK SPECIFIED ELSEWHERE:
- A. Irrigation System
- B. Lawns
- C. Earthwork
- D. General Requirements
- 1.3 QUALITY ASSURANCE:
- A. Provide plant materials in compliance with applicable State and Federal laws relating to inspection for diseases and insect infestation at growing site.
- B. Plants are subject to inspection and approval by the Landscape Architect. Plants required for the work may be inspected and tagged at the growing site before being dug.
- C. Observation at growing site does not preclude right of rejection at job site. Plants damaged in transit or at job site may be rejected.
- D. Employ only qualified personnel familiar with required work.
- E. Off-site topsoil and topsoil on-site Testing (paid by Landscape Contractor):
1. Provide source of off-site soil (If Required For Job)to the Owners representative for the purpose of soil investigation.
2. Take random representative soil samples from areas to be planted.
3. Test soil samples from both sources for pH, alkalinity, total soluble salts, porosity, sodium content and organic matter.
- F. File Certificate of inspection of plant material by State and Federal authorities with Landscape Architect, if required by State.
- 1.4 REFERENCED STANDARDS:
- A. American Standard for Nursery Stock, approved 1986 by American National Standards Institute, Inc. - Plant materials.
- B. Horne Third, 1976 - Cornell University - Plant nomenclature.
- C. ASTM - American Standard Testing Material - Sharp sand.
- 1.5 PRODUCT DELIVERY, STORAGE AND HANDLING:
- A. Delivery:
1. Deliver packaged materials in sealed containers showing weight, analysis and name of manufacturer. Protect materials from deterioration during delivery and while stored at site.
2. Do not deliver more plant materials than can be planted in one day unless adequate storage and watering facilities are available on job site. Storage of materials and equipment at the job site will be at the risk of the landscape contractor. The owner will not be held responsible for theft or damage.
3. If balled plants cannot be planted within 24 hours after delivery to site, protect root balls by heeling in with saw dust or other approved material.
4. Protect during delivery to prevent damage to root ball or desiccation of leaves.
5. Notify Landscape Architect of delivery schedule 48 hours in advance so plant material may be observed upon arrival at job site.
6. Remove rejected plant material immediately from site.
- 1.6 JOB CONDITIONS:
- A. Planting Restrictions:
- Perform actual planting only when weather and soil conditions are suitable in accordance with locally accepted practice. In no way shall any trees, plants, ground cover or seasonal color obstruct drainage or block a 2% minimum positive slope away from buildings.
- B. Utilities:
1. Determine locations of underground utilities and perform work in a manner which will avoid possible damage. Hand excavate, if required, to minimize possibility of damage to underground utilities.
2. Maintain grade stakes set by others until removal is mutually agreed upon by parties concerned.
3. Coordinate work with irrigation contractor to prevent damage to underground sprinkler system.
- 1.7 WARRANTY:
- A. Warranty for plants and trees shall be for one year after final acceptance. Replace dead materials and materials not in vigorous, thriving condition as soon as weather permits and on notification by Owner's Rep. Replace plants, including trees, which in opinion of Landscape Architect have partially died thereby damaging shape, size, or symmetry.
- B. Replace plants and trees with same kind and size as originally planted, at no cost to the Owner. Provide one-year warranty on replacement plants. These should be replaced at start of next planting or digging season. In such cases, remove dead trees immediately. Protect irrigation system and other piping conduit or other work during replacement. Repair any damage immediately.
- C. Warranty excludes replacement of plants after final acceptance because of injury by storm, drought, drowning, hail, freeze, insects or diseases.
- D. At the end of the warranty period, staking and guying materials if required shall be removed from the site.
- 1.8 MAINTENANCE:
- A. Water: Will be available on site. Provide necessary hoses and other watering equipment required to complete work.
- B. Until final acceptance, maintain plantings and trees by watering, cultivating, mowing, weeding, spraying, cleaning and replacing as necessary to keep landscape in a vigorous, healthy condition and rake bed areas as required.
- C. A written notice requesting final inspection and acceptance should be submitted to Landscape Architect or owners representative within seven (7) days prior to completion. At that time owner and Landscape Architect will prepare a final punch list to be reviewed with the landscape contractor.
- D. Following final acceptance, maintenance of plant material will become the Owner's responsibility. The Contractor shall provide Owner with a recommended maintenance program.

PART 2 - PRODUCTS

- 2.1 PLANTS:
- A. Quantities: The drawings and specifications are complementary; anything called for on one and not the other is as binding as if shown and called for on both. The plant schedule is an aid to bidders only. Confirm all quantities on plan.
- B. Plants shall be equal to well formed No. 1 grade or better; symmetrical, heavily branched with an even branch distribution, densely foliated and/or budded and a strong straight, distinct leader where this is characteristic of species. Plants shall possess a normal balance between height and spread. The Landscape Architect will be the final arbiter of acceptability of plant form, either before or after planting and shall be removed at the expense of the Landscape Contractor and replaced with acceptable plants as specified.
- C. Plants shall be healthy and vigorous, free of disease, insect pests and their eggs, and larvae.
- D. Plants shall have a well-developed fibrous root system.
- E. Plants shall be free of physical damage such as scrapes, broken or split branches, scars, bark abrasions, sun scalds, fresh limb cuts, disfiguring knots, or other defects.
- F. Pruning of all trees and shrubs, as directed by Landscape Architect, shall be executed by Landscape Contractor at no additional cost to the Owner.
- G. Plants shall meet the sizes indicated on the Plant List. Where a size or caliper range is stated, at least 50% of the material shall be closer in size to the top of the range stated.
- H. Plants indicated "B&B" shall be balled and burlapped. Plants shall be nursery grown unless otherwise specified in plant list. Balls shall be firm, neat, slightly tapered and well burlapped. Non-biodegradable ball wrapping material will not be accepted. Any tree loose in the ball or with broken ball at time of planting will be rejected. Balls shall be ten (10") inches in diameter for each one (1") inch of trunk diameter, measured six (6") inches above ball.
- I. Container grown plants shall be well rooted and established in the container in which they are growing. They shall have grown in the container for a sufficient length of time for the root system to hold the planting medium when taken from the container, but not long enough to become root bound.

- 2.2 SOIL PREPARATION MATERIALS:
- A. Peat Moss: Commercial sphagnum moss or hyhum peat.
- B. Pre mixed soils can be used as long as samples are submitted with submitted with manufacturer's data and laboratory test reports.
- C. Sandy Loam:
1. Friable, fertile, dark, loamy soil, free of clay lumps, subsoil, stones, and other extraneous material and reasonably free of weeds and foreign
2. Physical properties as follows:
- Clay - between 7-21 percent
- Silt - between 28-50 percent
- Sand - less than 52 percent
- D. Sharp Sand: Clean, washed sand, (fine aggregate) ASTM C-39.
- 2.3 COMMERCIAL FERTILIZER:
- A. Fertilizer shall be delivered in manufacturer's standard container printed with manufacturer's name, material weight, and guaranteed analysis. Fertilizers with N-P-K analysis other than that specified may be used provided that the application rate per square foot of nitrogen, phosphorus, and potassium is equal to that specified.
- B. Commercial Fertilizer for Planting Beds: Complete fertilizer 5-10-5 element ratio with minimum 8% sulfur and 4% iron plus micro-nutrients.
- C. Controlled-Release fertilizer planting tablets for tree planting pits, shall be equal to Agriform 20-10-15 planting tablets as manufactured by Sierra Chemical Co., Milpitas, California 45095 or approved equal.
- 2.4 MULCH:
- Bark mulch shall be hardwood mulch chips, ranging in size from 1/4-inch to 1-inch in size, medium fine texture, shredded.

PART 3 - EXECUTION

- 3.1 CONDITION OF SURFACES:
- A. New bed areas will be left within one tenth of a foot of finish grade by other trades. Contractor will be responsible for raking and smoothing of grade.
- B. Examine subgrade upon which work is to be performed. Notify the Landscape Architect or owners representative of unsatisfactory conditions.
- 3.2 SHRUB PLANTING
- A. All shrubs to be pocket planted. Excavate planting hole 3" larger than the width and height of the root ball. Backfill with 1/3 (soil mix and/or peatmoss), 1/3 native soil and 1/3 sand/loam.
- B. Plant where located, setting plants with tops of balls even with tops of beds, and compact soil carefully around each plant ball.
- C. Water each plant thoroughly with hoses to eliminate air pockets.
- D. Carefully prune plants to remove dead or broken branches, various tags, and hand-rake bed areas to smooth even surfaces, and mulch bed areas 1 inch deep.
- 3.3 GROUND COVER PLANTING
- A. Till 2 inches minimum of thoroughly mixed prepared soil or equal in all planting bed areas as follows:
1. 1 part sandy loam
- 1 part peat moss
- 1 part sharp sand
- Add 4 pounds commercial fertilizer per 100 SF of bed area and mix thoroughly.
- B. Plant where located, setting plants with tops of balls even with tops of beds, and compact soil carefully around each plant ball.
- C. Water each plant thoroughly with hoses to eliminate air pockets.
- D. Carefully prune plants to remove dead or broken branches and hand-rake bed areas to smooth even surfaces, and mulch bed areas 1 inch deep.
- 3.4 TREE PLANTING:
- A. Stake tree locations for Owners Representative approval prior to digging.
- B. Plant ornamental trees in pits 12-inches larger than the root ball. Plant shade trees in pits two feet greater in diameter than root ball and equal to depth of root ball.
- C. After excavation of tree pits, review water percolation. If tree pit does not drain adequately prepare hole for use with a tree sump. Paint PVC stand pipe and cover dark green. After tree is installed, pump water out on a daily basis.
- D. In the event rock or underground construction work or obstructions are encountered in any plant pit excavation work to be done under this section, alternate locations must be selected by the Landscape Architect. Where locations cannot be changed the obstructions shall be removed to a depth of not less than six (6") inches below bottom of ball when plant is properly set at the required grade. The work of this section shall include the removal from the site of such rock or underground obstructions encountered at the cost of the Landscape Contractor.
- E. Prepare soil for planting by thoroughly mixing two parts sandy loam and one part peatmoss or other approved organic matter. If planting soil does not fall within the pH range of 5.5 to 7.0 add limestone or aluminum sulphate to bring soil into the specified pH range.
- F. Backfill tree pits with a mixture of 1/2 prepared soil and 1/2 existing site soil. Lightly tamp every 6-inches to fill all voids and pockets. When pit is 2/3 full, water thoroughly and leave water to soak in. Place fertilizer planting tablets per manufacturer's recommendations. Complete backfilling and form a saucer around the tree.
- G. Completely fill each tree saucer with mulch to a depth of two inches.
- H. Contractor shall keep trees plumb until established. Guying and/or staking to maintain that plumb condition shall be at the Contractor's discretion. However, if trees are not plumb, the Contractor will be required to guy and/or stake those trees in a method acceptable to the Landscape Architect at no additional cost to the Owner.
- I. Pruning: Prune trees to preserve the natural character of the plant in a manner appropriate to its particular requirements in the landscape design as directed by the Landscape Architect. In general, remove at least one-third of wood by thinning and pruning. DO NOT cut back terminal branches. Thin native grown plants heavier than nursery grown plants. Remove sucker growth and broken or badly bruised branches.

- 3.5 SEASONAL COLOR PLANTING:
- A. Beds shall be excavated to a depth of 2 inches. Soil shall be replaced with 100% Living Earth Technology Complete Mix or equal.
- B. Plant where located, setting plants with tops of balls even with tops of beds, and compact soil carefully around each plant ball.
- C. Water each plant thoroughly with hoses to eliminate air pockets.
- D. Carefully prune plants to remove dead or broken branches and hand-rake bed areas to smooth even surfaces and mulch bed areas 1 inch deep.
- 3.6 CLEANUP:
- During work, keep premises neat and orderly including organization of storage areas. Remove trash, including debris resulting from site daily as work progresses. Keep walk and driveway areas clean by sweeping or hosing.

END OF LANDSCAPING SECTION

LAWNS

PART 1 - GENERAL

- 1.1 SCOPE:
- Furnish all labor, tools, transportation, materials, equipment, supervision, etc., required to adequately establish a dense lawn of permanent grasses, free from lumps and depressions as indicated by plans and specifications.
- Reduce any part of the area failing to show uniform cover until a dense lawn is established. The cost of miscellaneous labor and materials for topsoil, weeding, tilling, pest control, fertilizing, etc., are not separate pay items and shall be included in the bid price for grassing.
- 1.2 RELATED WORK SPECIFIED ELSEWHERE:
- A. Irrigation System
- B. Landscaping
- 1.3 MAINTENANCE OF GRASS:
- The contractor shall maintain the grass until final acceptance. Such maintenance shall include spraying, weeding, cultivation, fertilizing, watering, disease and insect control, top dressing low spots, plus any procedures consistent with horticultural practice necessary to insure normal, vigorous, and healthy grass.
- 1.4 JOB CONDITIONS:
- A. Water: Will be available on site. Provide necessary hoses and other watering equipment required to complete work.
- B. Lawn areas will be left within 1/10 of a foot of finish grade by other trades. Fine grading, raking and smoothing will be the responsibility of the contractor.
- 1.5 SCHEDULE:
- A. Seeding/hydromulching - Bermudagrass: Complete only between May 1 to August 31 under favorable conditions. (warm season)
- B. Seeding/hydromulching - Perennial Ryegrass: Complete only between September 1 to April 30, except at front of project, as determined by owner, under favorable climatic conditions.
- C. Sodding: Sod bermuda between March 15 and September 30. Between October 1 and March 14 overseed sod with Perennial ryegrass under favorable conditions. (Use nursery overseeded sod, in lieu of seeding after installation, if available.)
- D. Qualifications: Due to unseasonable weather, the above dates may vary; however, do not proceed with grassing operations beyond these dates without assuming full responsibility for a stand of grass.
- 1.6 ACCEPTANCE:
- The work will be accepted when a completed, undamaged stand of grass is achieved, as approved by the Owner's Representative.




PART 2 - MATERIALS

- 2.1 TOPSOIL:
- A. (If specified on the plans as a requirement) Friable, fertile, dark, loamy soil, free of clay lumps, sub-soil stones, and other extraneous material and reasonable free of weeds and foreign grasses. Topsoil containing dallgrass or nutgrass shall be rejected.
- B. Physical properties as follows:
- Clay - between 7-21 percent
- Silt - between 28-50 percent
- Sand - less than 52 percent
- 2.2 GRASS:
- A. Bermuda Grass: Extra fancy, hulled and treated, lawn type seed, delivered to site in original, unopened containers meeting requirements of Texas State Seed Law. Minimum purity germination 40 percent.
- B. "Raleigh" St. Augustine Grass: Solid Sod, live, rich, dark green in color, free of foreign grasses, weeds, nutgrass, cut with a full 3/4 inch of heavy clay covering roots. Deliver to site in 12 inch squares or 12 inch wide rolls. Do not stack for more than 24 hours between time of cutting and time of delivery.
- 2.3 FERTILIZER:
- Fertilizer shall be organic base, uniform in composition, dry and free flowing. Deliver fertilizer to site in original, unopened containers, each bearing manufacturer's guaranteed statement of analysis.
- A. First application: 12-12-12 element percentage with minimum 8% sulfur and 4% iron, plus micro nutrients.
- B. Second application: 9-11-2 element ratio. Nitrogen source to be a minimum 50% slow release organic nitrogen (SCU or UF) plus minimum 8% sulfur and 4% iron plus micro nutrients.

PART 3 - EXECUTION

- 3.1 PREPARATION:
- A. Scarify lawn areas where excessive compaction is greater than 25% Standard Proctor to a depth of 4-inches by discing or rototilling. Repeat cultivation as required to thoroughly loosen soil.
- B. Leave areas free of weeds and ready for final grading.
- C. Provide barricades around scarified areas to prevent compaction by construction vehicles.
- 3.2 FINAL GRADING:
- A. Remove from site and legally dispose of stones 3/4-inch and larger, sticks and other debris exposed during this operation.
- B. Provide final grading leaving surface uniform without depressions and undulations, graded approximately 1-inch below paving.
- C. Secure approval from the Landscape Architect prior to proceeding with grassing operation.
- 3.3 HERBICIDE:
- Apply herbicide to remove any remaining weeds. This work is to be performed by a licensed applicator following the manufacturer's recommendations.
- 3.4 FERTILIZER:
- A. Place first application with hydromulch at rate of 12 pounds per 1,000 square feet.
- B. Uniformly distribute second application using a rotary type fertilizer spreader 3-4 weeks after first application at 12 pounds per 1,000 square feet.
- 3.5 HYDROMULCH/SEEDING:
- A. At the time of hydromulch/seeding, soil shall be moist but not muddy, and wind velocity shall not exceed ten (10) miles per hour. Add water if required to moisten soil.
- B. Hydromulch seed uniformly at the rate of 2 pounds of Bermudagrass seed per 1,000 square feet.
- C. Add tackifier to hydromulch mix for slopes 5:1 or greater at the rate of 1 lb. per bag of mulch.
- D. Use a 4' x 8' batter board against bed areas.
- 3.6 MECHANICAL SEEDING:
- Seed uniformly at a rate of 125 pounds of Bermudagrass seed per acre. Use grass drill, brilliant seeder, or viking roller.
- 3.7 SOLID SOD:
- A. Solid Sod: Plant grass by hand, edge to edge with staggered joints. Topdress with sharp sand raked in carefully to fill joints. Roll to eliminate undulations and provide complete soil contact.
- B. Fertilizing: Fertilize immediately after grass is planted at rate of 4 lbs per 1,000 square foot. Repeat fertilizing at the same rate 3-4 weeks later.
- 3.8 ESTABLISHMENT AND MAINTENANCE OF LAWN AREAS:
- A. Watering:
1. Water lawn areas immediately after grassing operation.
2. Continue watering as required to keep soil uniformly moist to a minimum depth of 4-inches.
3. Be alert to over-watering newly planted grass, particularly in heavy clay soils.
- B. Replanting/Erosion Control:
1. Correct any erosion that may occur during the establishment of grass.
2. Reseed (sod) any areas not showing sufficient growth within 3 weeks after initial grassing. Continue seeding (sodding) until a stand of grass is achieved.
3. A stand of grass will be defined as a uniform cover of actively growing turf.
- C. Mowing/Weed Control:
1. Mow lawn areas weekly until a stand of grass is achieved. Begin mowing when the lawn reaches a height of 3-inches; set mower to cut at 2-inches. A minimum of two mowings is required.
2. Mow lawn areas until acceptance, removing all foreign vegetation, either by hoeing or pulling. If approved, herbicide spot treatments may be used.
- 3.9 CLEANUP:
- During work, keep premises neat and orderly, including organization of storage areas. Remove trash, including debris resulting from removing weeds and rocks from site daily as work progresses. Keep paved areas clean by sweeping or hosing.


END OF LAWN SECTION

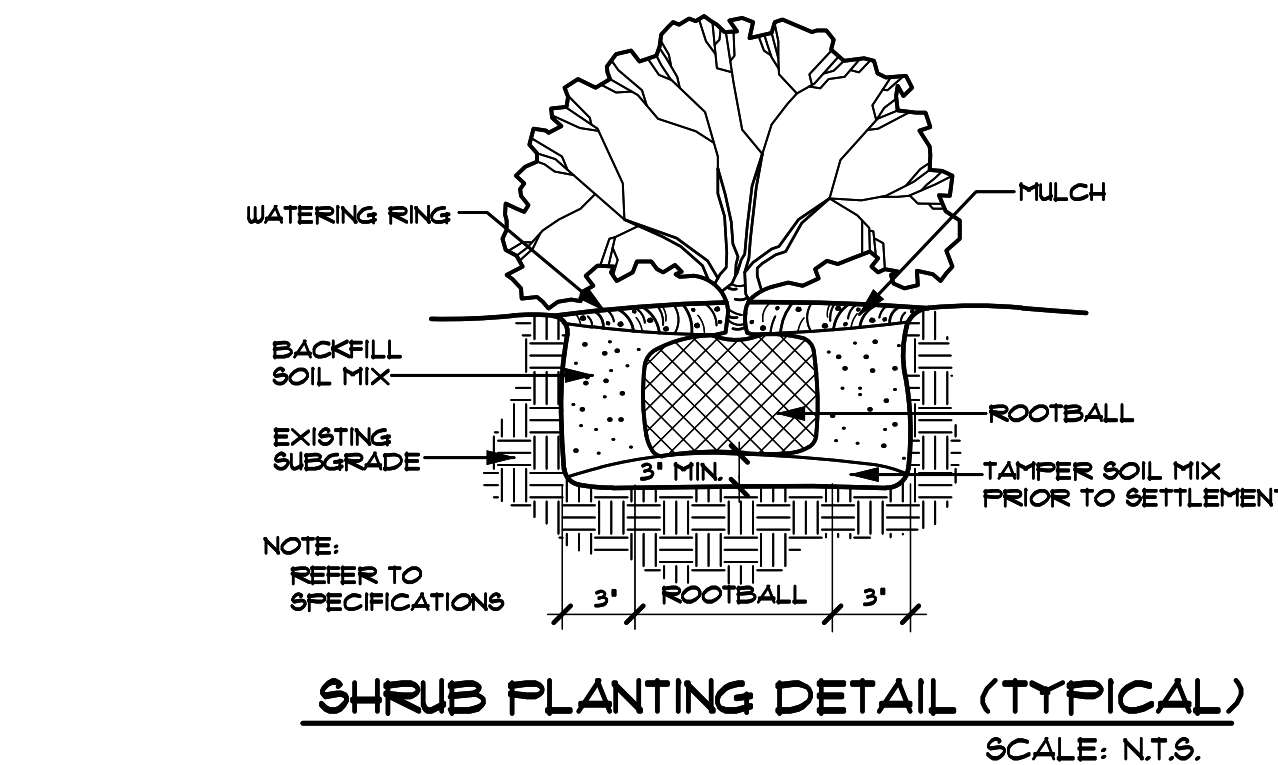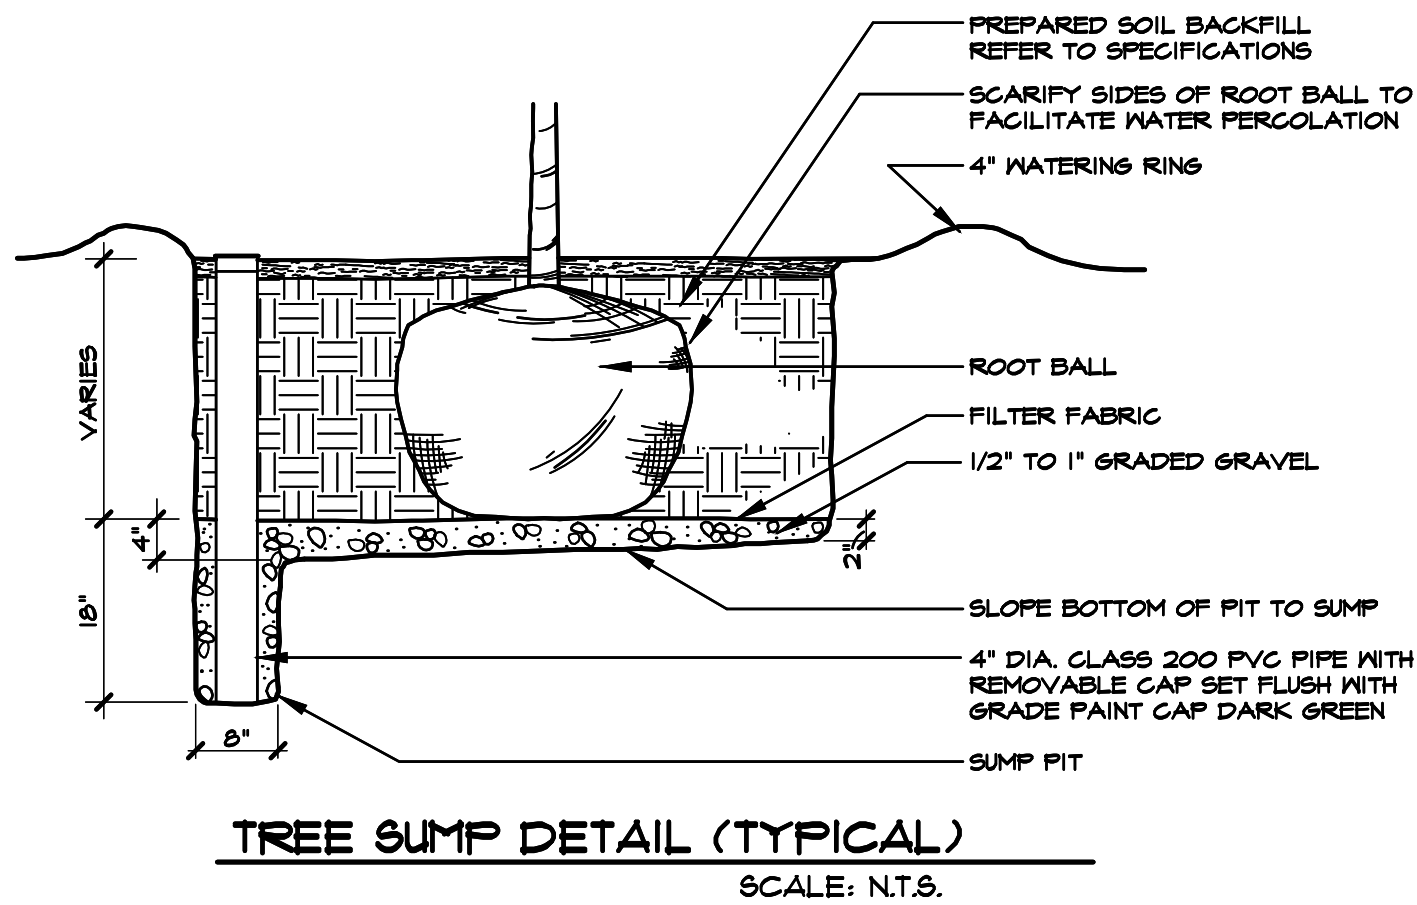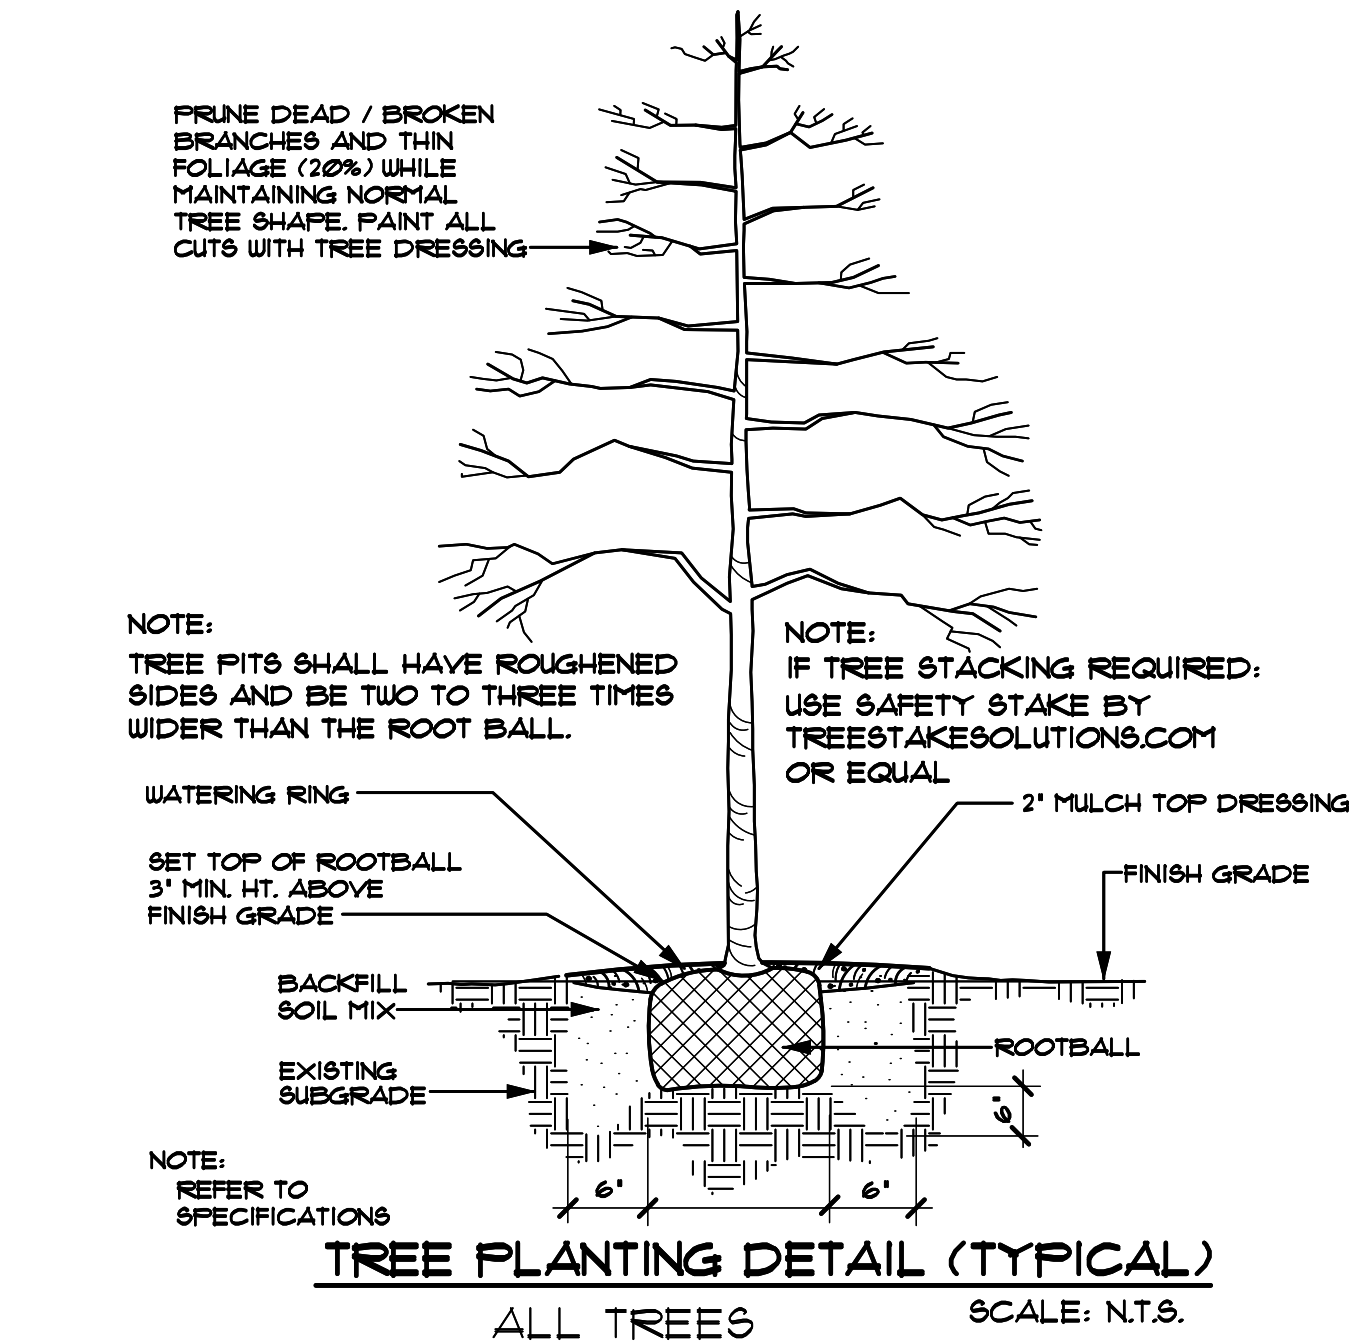

Date:	
Revisions:	
#	

Issued For:	PERMIT / BID
Job No.	26128
Scale	N.T.S.
Drawn By:	JDG
Date	08-21-2026

Hillside Community Church
Site Renovations
Fort Worth Texas

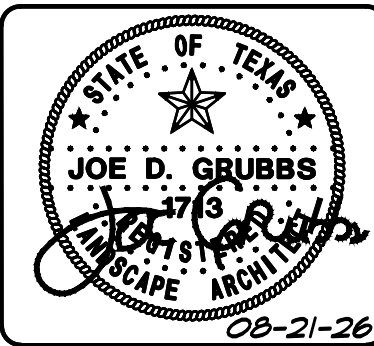

Sheet Title:	Landscape Specifications
Sheet Number:	L2
of L2 Sheets	